



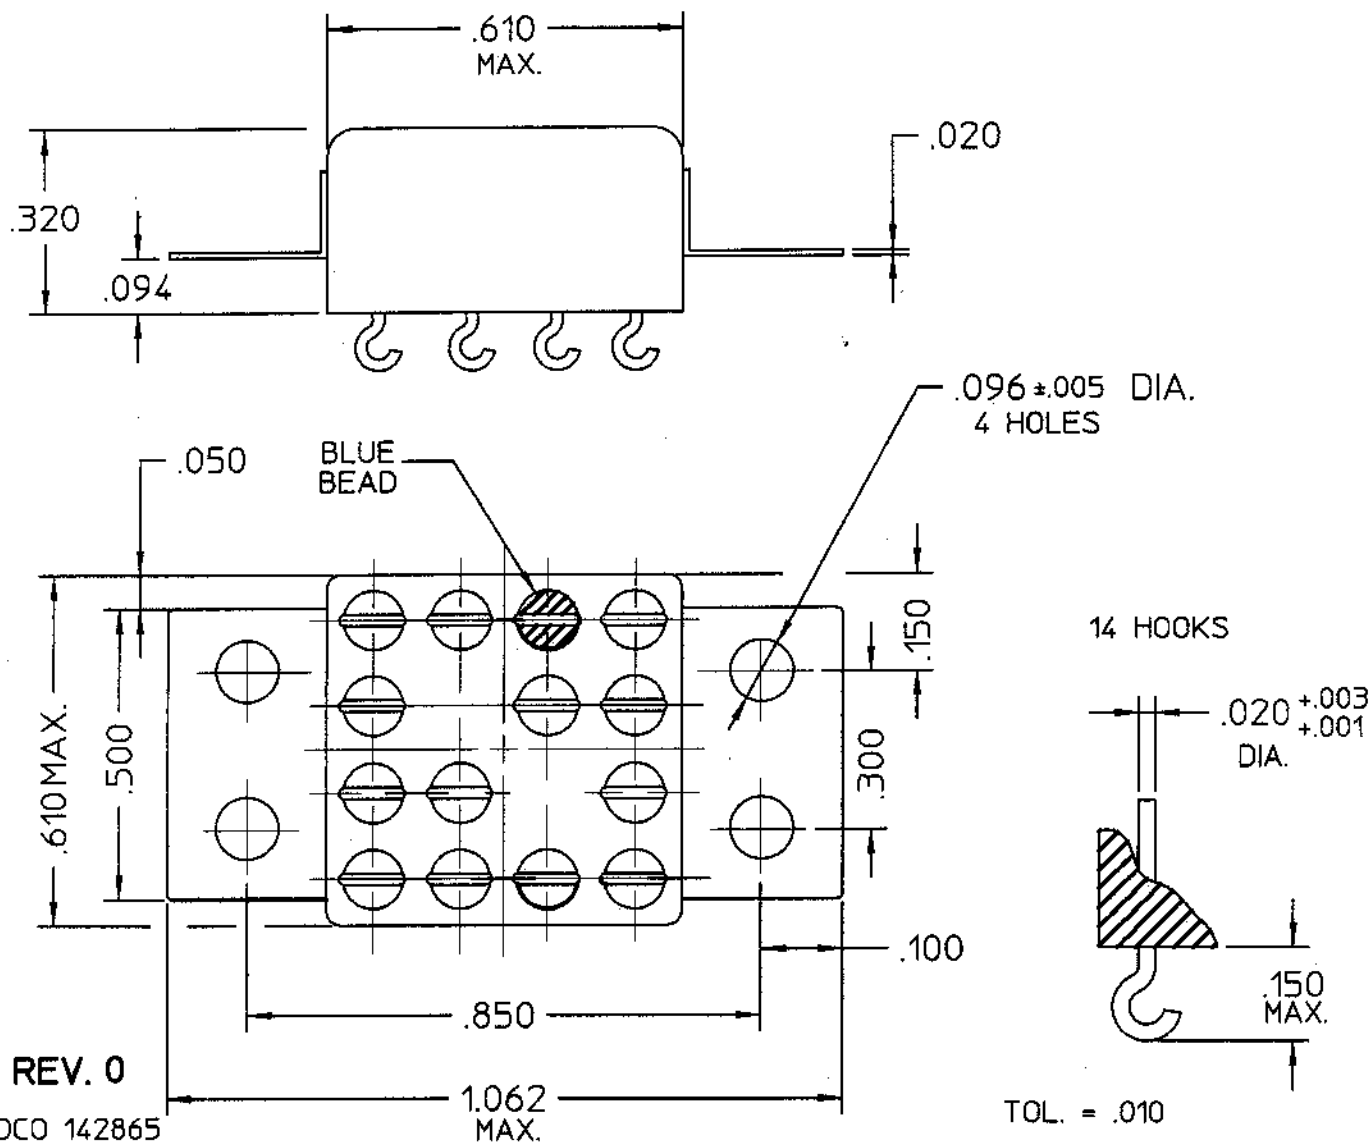

COIL: @ 25°C  
 RESISTANCE 720 OHMS ±10%  
 NOMINAL VOLTAGE 26.5 VDC  
 MUST OPERATE 13.5 VDC  
 MUST RELEASE 8.1 VDC MAX., 1.5 VDC MIN.

ENVIRONMENT:  
 VIBRATION: 10 CPS TO 3000 CPS @ 30 g's  
 SHOCK 75 g's 6 MS. DURATION  
 TEMPERATURE -65 °C TO +125 °C  
 NOTES: OPERATE 4 MS MAX.  
 RELEASE 4 MS MAX.  
 CONTACT STABILIZATION 2.5 MS MAX.

# CUSTOMER DATA SHEET



TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO  
 2 AMPS 28 VDC RESISTIVE  
 100,000 OPERATIONS

DR. B.D. 4/9/01

CK. 4/9/01

**CH Technologies**  
 advanced control electronic solutions

CUST. QPL  
 CUST. NO. M39016/14-001M REV.

"3SBH" RELAY

3SBH1138A2