





Tous droits strictement reserves. Reproduction ou communication a des tiers interdite sous quelque forme que ce soit sans autorisation ecrite du proprietaire. Propriete de c FCI. Droits de reproduction FCI.

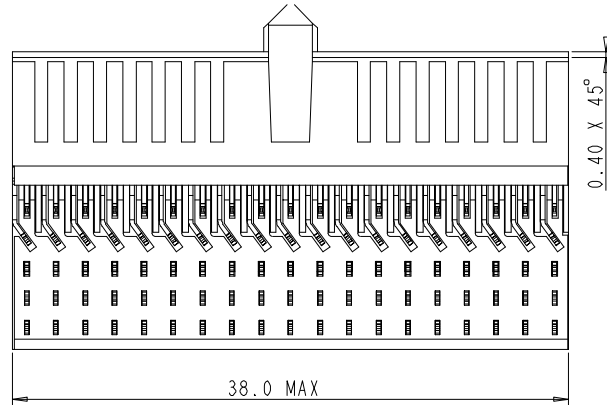

All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor. Property of FCI. Copyright FCI.

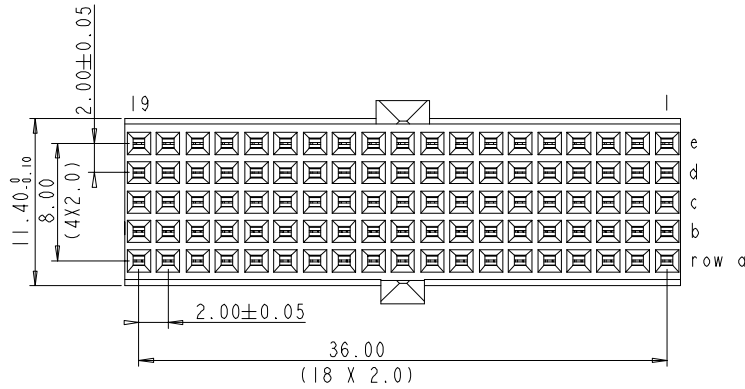

LAY OUT
P.C.B HOLE

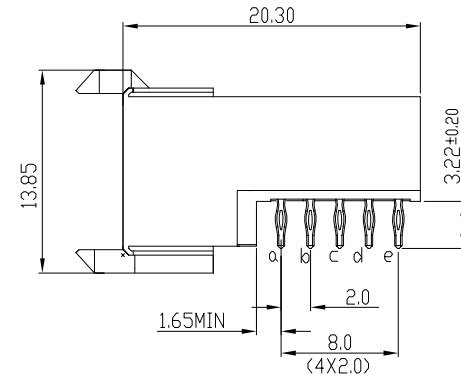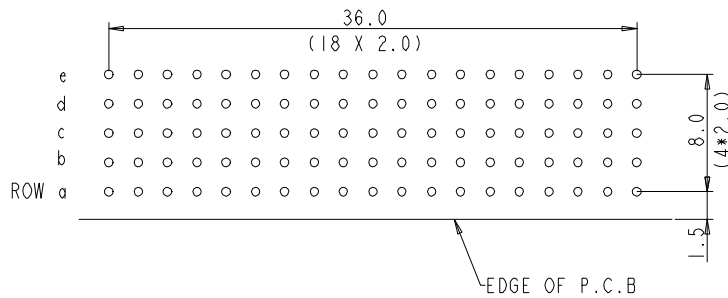

PERFORMANCE CHARACTERISTICS

CURRENT RATING:
1.5 A AT 20°C (FULLY LOADED)
1 A AT 70°C (FULLY LOADED)

RATED VOLTAGE: 500 V AC (CONT / CONT)

OPERATING TEMPERATURE : -55°C TO 125°C


CONTACT RESISTANCE : 20 mΩ MAX

INSERTION FORCE: 0.75N MAX/CONT

EXTRACTION FORCE : 0.15N MIN /CONT

INSULATION RESISTANCE: 10⁴ MΩ MIN

NOTES

1.  LEAD FREE INDICATOR :LF=LEAD FREE
PERFORMANCE LEVEL INDICATION
(REF DWG NO.BS.C.201844.003)

2. THIS PRODUCT IS CSA APPROVED.
THIS PRODUCT IS UL RECOGNIZED.

3.FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING :BS.A.201572.001

4.THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY
REGULATIONS AS DESCRIBED IN GS-22-008

rev	ecn no	dr	date
A	conversion version 02	KN	14-09-01
B	EC B10088	MF	20-11-01
C	DG05-0278	Kosor	02-08-05
D	DG10-0110	NZ	05-30-10

Material			Spec ref				
Mat code			✓	tolerance	projection	MM 	
Heattreat				1DEC+0.2 1DEC 2DEC ± 0.1 2DEC ANGLE±1°/0.5°			
Plating/Finish							
Dr	N.OTTO	05-06-99			size	Scale	
Eng			Product family		A4	1.500	
Chr			Model Name		ECN		
Appr			Model Revision		REL Level		
FCI 	title		MPACS 5+2R RA RCP CONN TYPE AB		dwg no	BSC201418042	Rev. D
Pro/E file	catalog no	HM2R67PA5100----		CUSTOMER	sheet 1 of 1		