
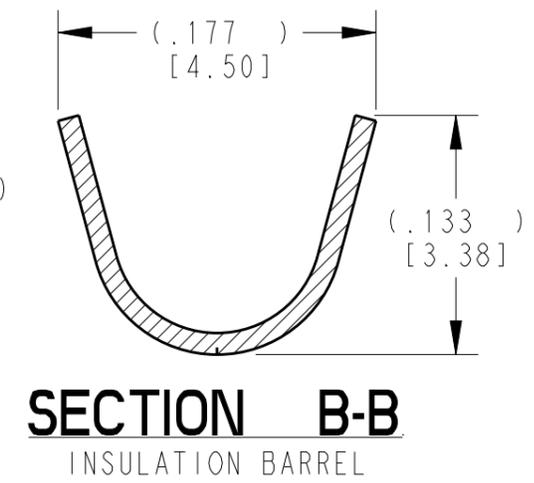
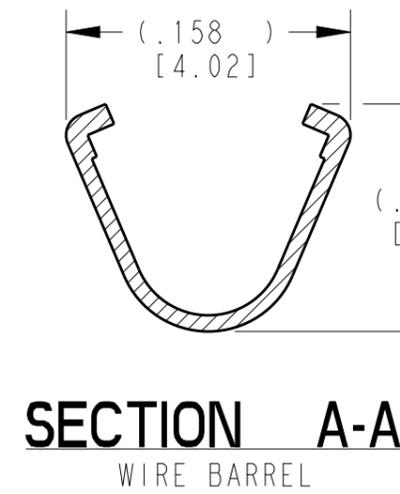
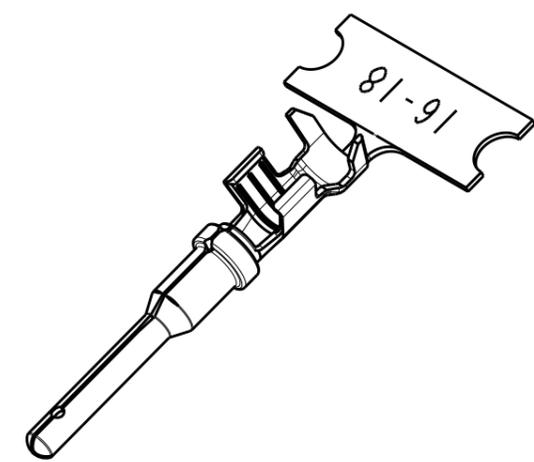


THIS DRAWING IS UNPUBLISHED
 (C) COPYRIGHT 1999 BY TE CONNECTIVITY ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
	F	REVISED PER E.O. P16998	08DEC2000	SP	RDR
	G	REVISED PER E.O. P19555	11JUL2007	JA	RDR
	H	REVISED PER E.O. P20396	25JUN2010	JA	RDR
	J	REVISED PER ECO-15-007761	289MAY2015	RL	DM

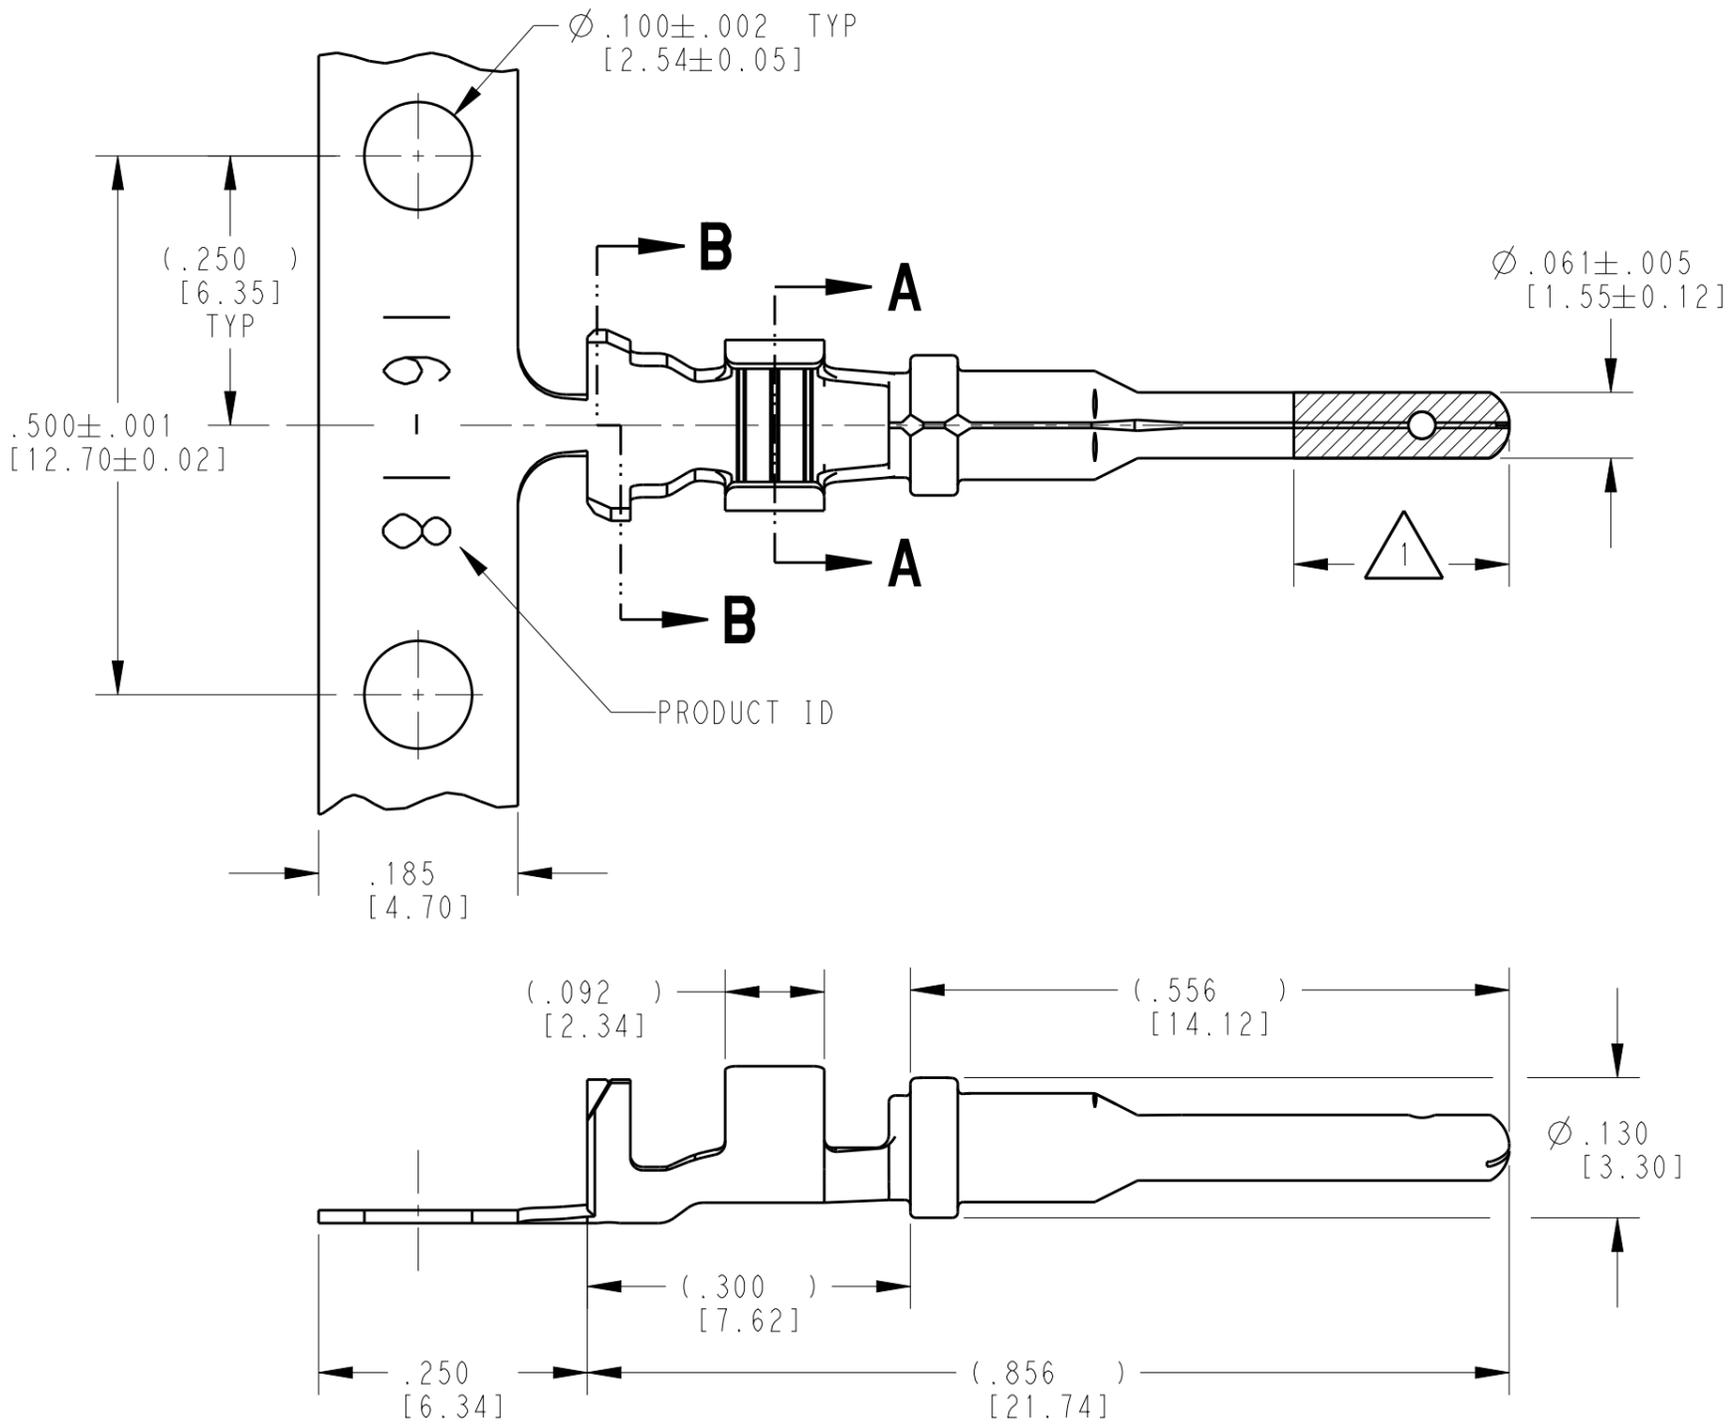

- 3 MATERIAL: .012 [0.30] THICK COPPER ALLOY
- 2. WIRE RANGE: 18 AWG TO 14 AWG [0.75-2.0 mm²]
INSULATION RANGE: $\phi .075-.140$ [$\phi 1.91-3.56$]
- 1 APPLIES ONLY TO SELECTIVE GOLD 1060-16-0144.
INDICATED DIMENSION SHOWS GOLD PLATED AREA.

NOTES: UNLESS OTHERWISE SPECIFIED

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M. BLUM 04NOV1999
DIMENSIONS: INCHES [mm]		CHK A. ROLINSKI 08DEC2000
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD R. REED 08DEC2000
0 PLC ±	1 PLC ±	PRODUCT SPEC 0425-015-0000
2 PLC ±	3 PLC ±	APPLICATION SPEC 114-151000
4 PLC ±	ANGLES ±	WEIGHT 0.33 g
MATERIAL 3	FINISH SEE TABLE	Customer Drawing

TE INTERNAL PN	DEUTSCH PN	PLATING
1060-16-0122	1060-16-0122	NICKEL
1060-16-0144	1060-16-0144	SELECTIVE GOLD
1060-16-0177	1060-16-0177	TIN

STE TE Connectivity

NAME: STAMPED CONTACT PIN SIZE 16

SIZE A3	CAGE CODE 4AFU8	DRAWING NO. 1060-16-01XX	RESTRICTED TO -
---------	-----------------	--------------------------	-----------------

SCALE 6:1 SHEET 1 OF 1 REV J