
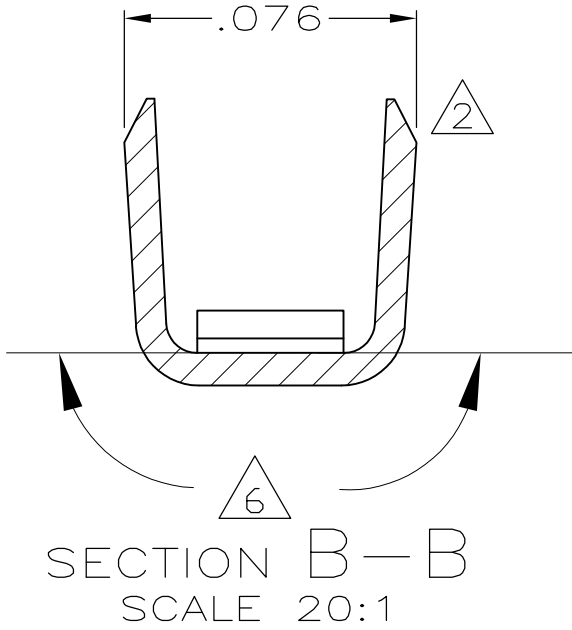


2		1					
LOC	DIST	REVISIONS					
GP	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			H1	REVISED PER ECO-09-021510	09SEP09	KK	AEG
			H2	REVISED PER ECO-12-011709	26JUN12	RW	SY

- 1
- .000100-.000200 BRIGHT TIN-LEAD OVER .000050 MIN. NICKEL.
- 2
- SPLICE WILL ACCOMMODATE FLEXIBLE FLAT CABLE .050 OR .062 WIDE CONDUCTORS ON .100 CENTERS (CABLE=.015 MAX THK).
- 3
- FOR FFC MACHINE.
- 4
- GOLD FLASH IN CRIMP BARRELS OVER .000050 MIN NICKEL ON ENTIRE CONTACT.
- 5
- OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI
- 6
- GOLD PLATING MAY OR MAY NOT BE PRESENT ON THE BOTTOM OF THE CRIMP BARREL IN THIS AREA

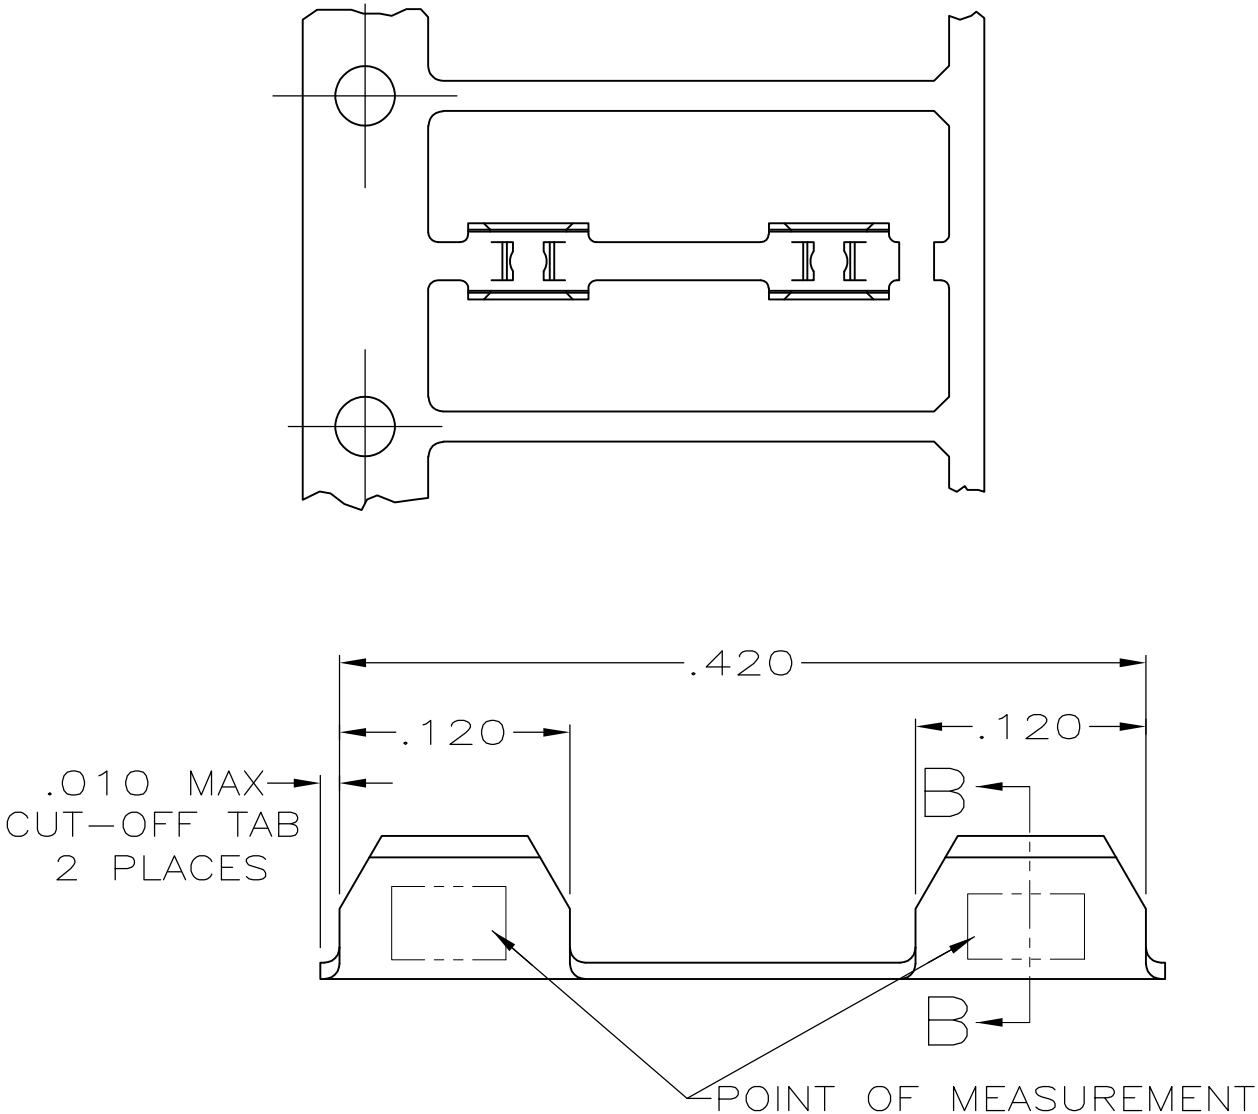

5	OBSOLETE	LOOSE PIECE	4	487787-5
		REEL	3	487787-4
		LOOSE PIECE	1	487787-3
		REEL	3	487787-2
		REMARKS	FINISH	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. GALLUCCI 3-23-89		 Tyco Electronics Tyco Electronics Corporation Harrisburg, PA 17105-3608				
		CHK D.L. ROCKER 3-23-89						
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME SPLICE, FFC TO FFC, .100CL —				
		0 PLC ± —						
		1 PLC ± —						
		2 PLC ± —						
3 PLC ± .005		PRODUCT SPEC 4-6-89 G.D. MILLER 108-9024		SIZE A3 CAGE CODE 00779 DRAWING NO C-487787 RESTRICTED TO —				
4 PLC ± —		APPLICATION SPEC 114-16002						
ANGLES ± —		WEIGHT —						
MATERIAL PHOS. BRONZE		FINISH SEE TABLE		CUSTOMER DRAWING		SCALE 10:1	SHEET 1 OF 1	REV H2