

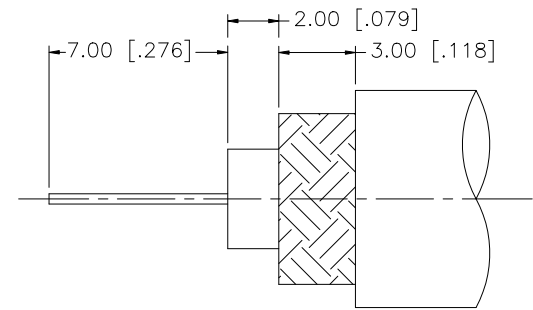


REV.	DATE	ECR NO.	DESCRIPTION
A	09/08/98	—	RE-DIMENSION DDRAWING, ADD CABLE STRIPPING DIMS.
B	07/23/99	—	UPDATE CABLE STRIPPING DIMENSIONS
C	06/02/08	100022	UPDATE DRAWING FORMAT

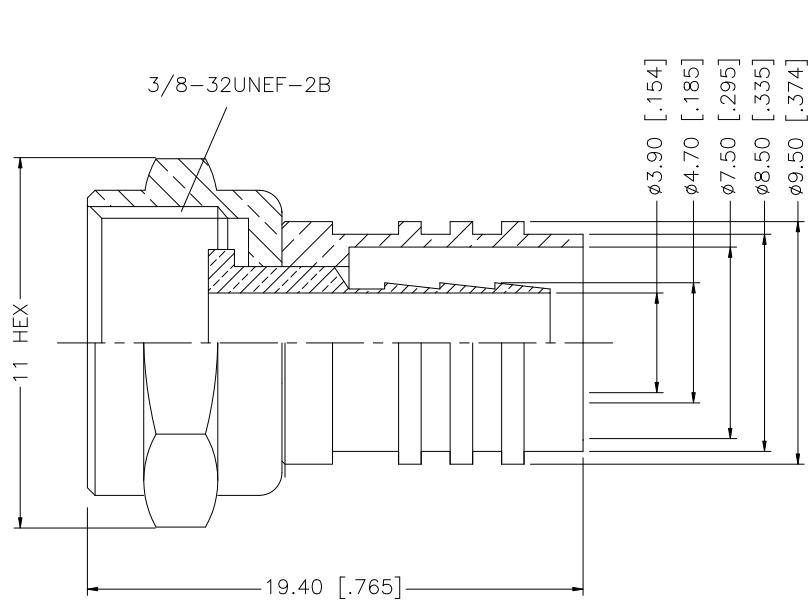

STEP-1

STRIP CABLE TO
RECOMMENDED DIMENSIONS

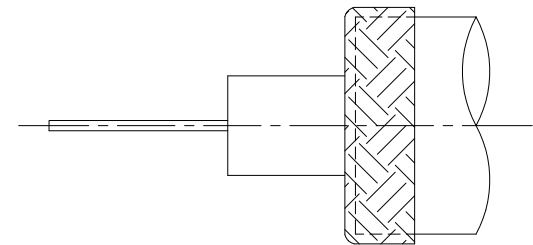

STEP-2

FOLD SHIELD BACK AS SHOWN.

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020"	APPROVALS		DATE		Amphenol Connex									
8						DRAWN	GRS	06/02/08											
7						CHECKED									PART DESCRIPTION				
6						ISSUED													
5						SHEET		1 OF 1		PART NO.									
4						CAD FILE		C:/222/222117.DWG							222117				
3	SHELL	BRASS	NICKEL	1		DO NOT SCALE DRAWING				DWG. NO.		222117.DWG		REV.					
2	HOUSING	BRASS	NICKEL	1															
1	BODY	BRASS	NICKEL	1															
	DESCRIPTION	MATERIAL	FINISH	QTY															