

NOTES: UNLESS OTHERWISE SPECIFIED
1. FOR USE WITH RG-174, 188, 316, OR EQUIVALENT CABLE.

2. MATERIAL SPECIFICATIONS:
INSULATOR: PTFE
RETAINER RING: BERYLLIUM COPPER
FERRULE: COPPER
ALL OTHER METAL PARTS: BRASS


3. FINISH SPECIFICATIONS:
CONTACT: .000003 MIN THICK GOLD OVER .000050 MIN THICK NICKEL
ALL OTHER METAL: THIN GOLD OVER .000050 MIN THICK COPPER

4. ELECTRICAL SPECIFICATIONS:
IMPEDANCE: 50 OHMS
FREQUENCY RANGE: DC TO 6.0 GHz
VSWR: 1.20 MAX TO 3.0 GHz




5. CONTACT AND FERRULE SHIPPED LOOSE

6. CRIMP FERRULE (.128[3.25] HEX) AND CONTACT PIN TO SOLDER.

REV	DESCRIPTION	BY DATE	APPD
A	ER0509185	J 08/11/15	DCAM

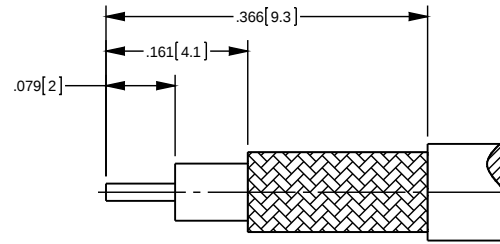

RECOMMENDED CABLE STRIPPING DIM'S

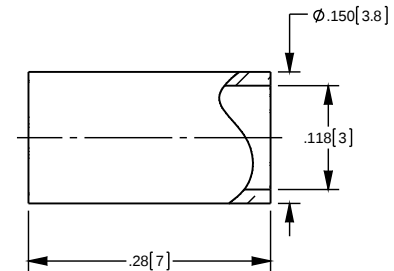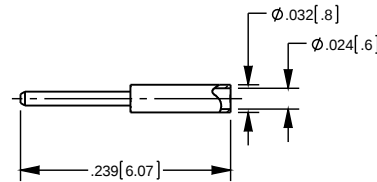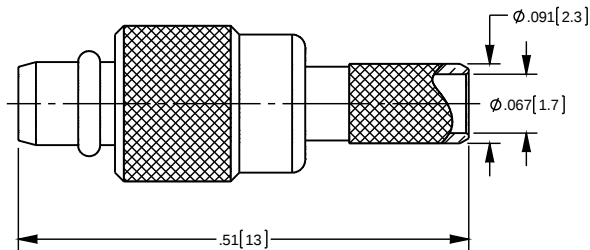

CATALOG P/N: 1310A204M

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES [MM] TOLERANCES: DECIMAL: .XX [XX] ± .01 [0.3] XXX [XXX] ± .005 [0.13] XXXX [XXXX] ± .000X ANGLES: ± 2° SCALE: 6:1				 by WINCHESTER Winchester Electronics Corporation 199 Park Road Ext Suite 104 Middlebury, Connecticut 06762			
CUSTOMER SALES DRAWING				MMCX CRIMP PLUG (FOR RG-174, 188A, 316) (RoHS)			
DRAWN J	DATE 07/16/2015	APPROVED J	DATE 08/11/2015				
APPROVED DCAM	DATE 07/16/2015	APPROVED XXX	DATE XX/XX/XX				
A				SD1310A204M		SHT 1	OF 1
						REV A	