
+


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUILT CORP.

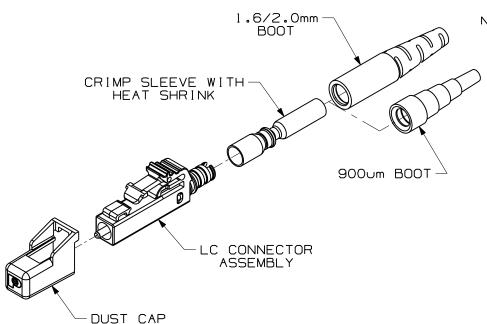


NOTES:

- I. SEE CURRENT CATALOG FOR PART NUMBER SUFFIXES TO INDICATE COLOR AND/OR PACKAGE QUANTITY.
- 2. MATERIAL:
 BODY/HARDWARE: PLASTIC
 BOOTS: THERMOPLASTIC RUBBER
 FERRULE: ZIRCONIA CERAMIC
- 3. FULLY COMPLIES WITH THE FIBER OPTIC CONNECTOR
 PERFORMANCE REQUIREMENTS AS SPECIFIED BY TIA/EIA-568-B.3.
 4. ALL MATERIALS AND COMPONENTS USED MUST MEET THE
- 4. ALL MATERIALS AND COMPONENTS USED MUST MEET THE MATERIAL RESTRICTIONS OF ROHS, (EUROPEAN DIRECTIVE 2002/95/EC ON THE RESTRICTION OF HAZARDOUS SUBSTANCES) AS PROPOSED BY THE ROHS TECHNICAL ADAPTATION COMMITEE.
- 5. DIMENSIONS IN BRACKETS ARE METRIC [mm]

PANDUIT PART NUMBER	APPLICATION	BOOT COLOR	WE I GHT		
NKFLCSMWH	62.5/125 OM1	WHITE			
NKFLCSMBL	50/125 OM2	BLACK	.037 lb/10 pcs [16.7g/10 pcs]		
NKFLCSMAQ	50/125 OM3	AQUA	[16.7g/10 pcs]		
NKFLCSSWH	9/125 051/052	WHITE			

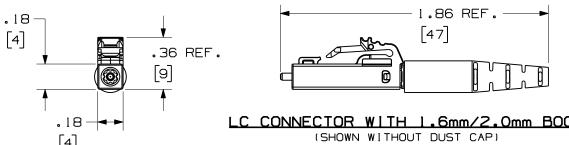



LC CONNECTOR WITH 1.6mm/2.0mm BOOT (SHOWN WITHOUT DUST CAP) LC CONNECTOR WITH 900um BOOT (SHOWN WITHOUT DUST CAP)									
									NETKEY FIBER OPTIC SINGLEMODE/MULTIMODE SIMPLEX LC CONNECTOR customer drawing
									TINLEY PARK, ILL 60477
									ALL DIMENSIONS ARE GIVEN IN INCHES UNLESS OTHERWISE SPECIFIED. DIMENSIONAL TOLERANCES ARE: (.XI (.XXX):.010 [0.3] SCALE NONE
									DRAWN BY EFK MATERIAL PART NO. NKFLCSM • NKFLCSS • •
R REV	12-21-09 DATE	EFK BY	СНК	RELEASED TO PRODUCTION DESCRIPTION	01302-65 ECN -	R	CUST	SUP	DATE 12-21-09 ORAWING NO. SIZE O1302-65