



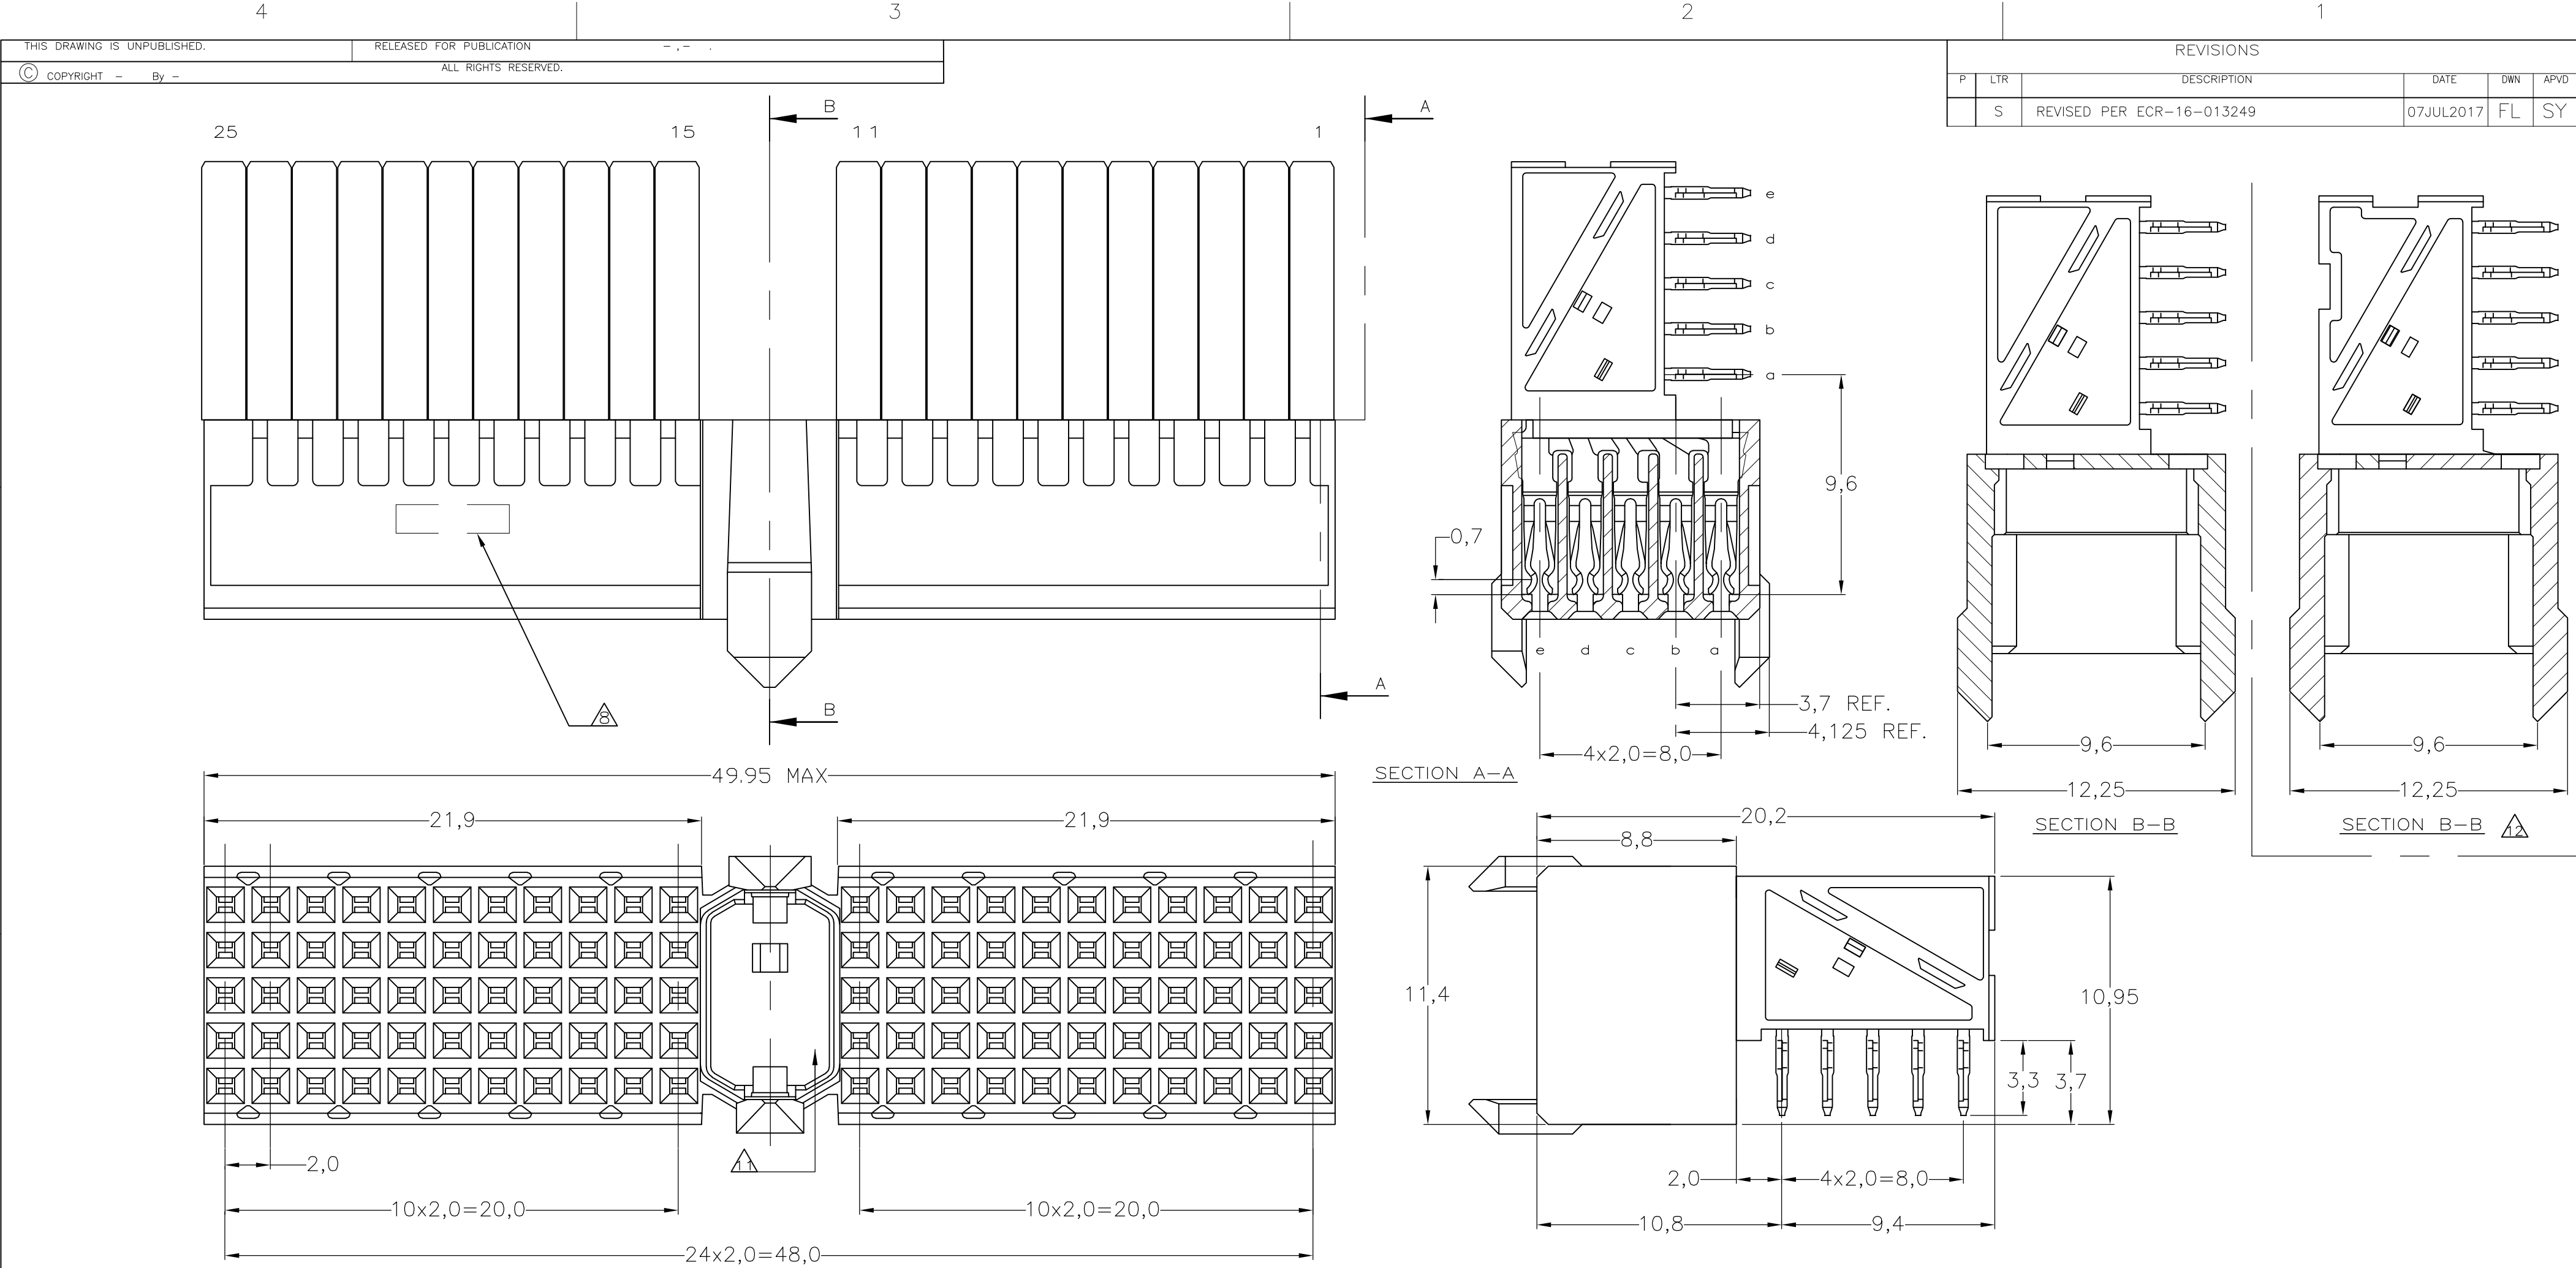

NOTES:

1 MATERIAL CONTACT; PHOSPHORBRONZE
2 MATERIAL HOUSING; GLASSFILLED POLYESTER (GRAY) UL-RATING 49V0
3 GENERAL PLATING SPECIFICATION: UNDERPLATING (ENTIRE CONTACT): 1,27µm NICKEL MIN.
4 AND ACTION PIN: 0,5µm TIN-LEAD MIN.
5 FOR PLATING OF MATING SURFACES SEE APPLICABLE SPECIFICATION REFERENCE FOR EACH DASH NUMBER.
6 CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 2.
7 CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 1.
8 CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL III, CENTRAL OFFICE APPLICATIONS.
9 CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL III, UNCONTROLLED ENVIRONMENT APPLICATIONS.
10 CONNECTOR LUBRICATED WITH TELCORDIA GR-1217-CORE APPROVED LUBRICANT.
11 CONNECTOR MARKED WITH PARTNUMBER AND DATECODE.
12 THE MARKING CAN APPEAR ON THE FRONT SIDE OR ON THE BACK SIDE.
13 PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID. 110 HOLES.
14 FITS WITH INTEGRATED GROUND RETURN UPPERSHIELD, BASIC P.N. 338107
15 AND INTEGRATED GROUND RETURN LOWERSHIELD, BASIC P.N. 338108
16 AREA RESERVED FOR CODING KEY, BASIC P.N. 100526
17 CONNECTOR ASSEMBLED WITH ALTERNATE FEMALE CONTACTS.
18 0.76µm MIN GOLD PLATING AT MATING SURFACES.

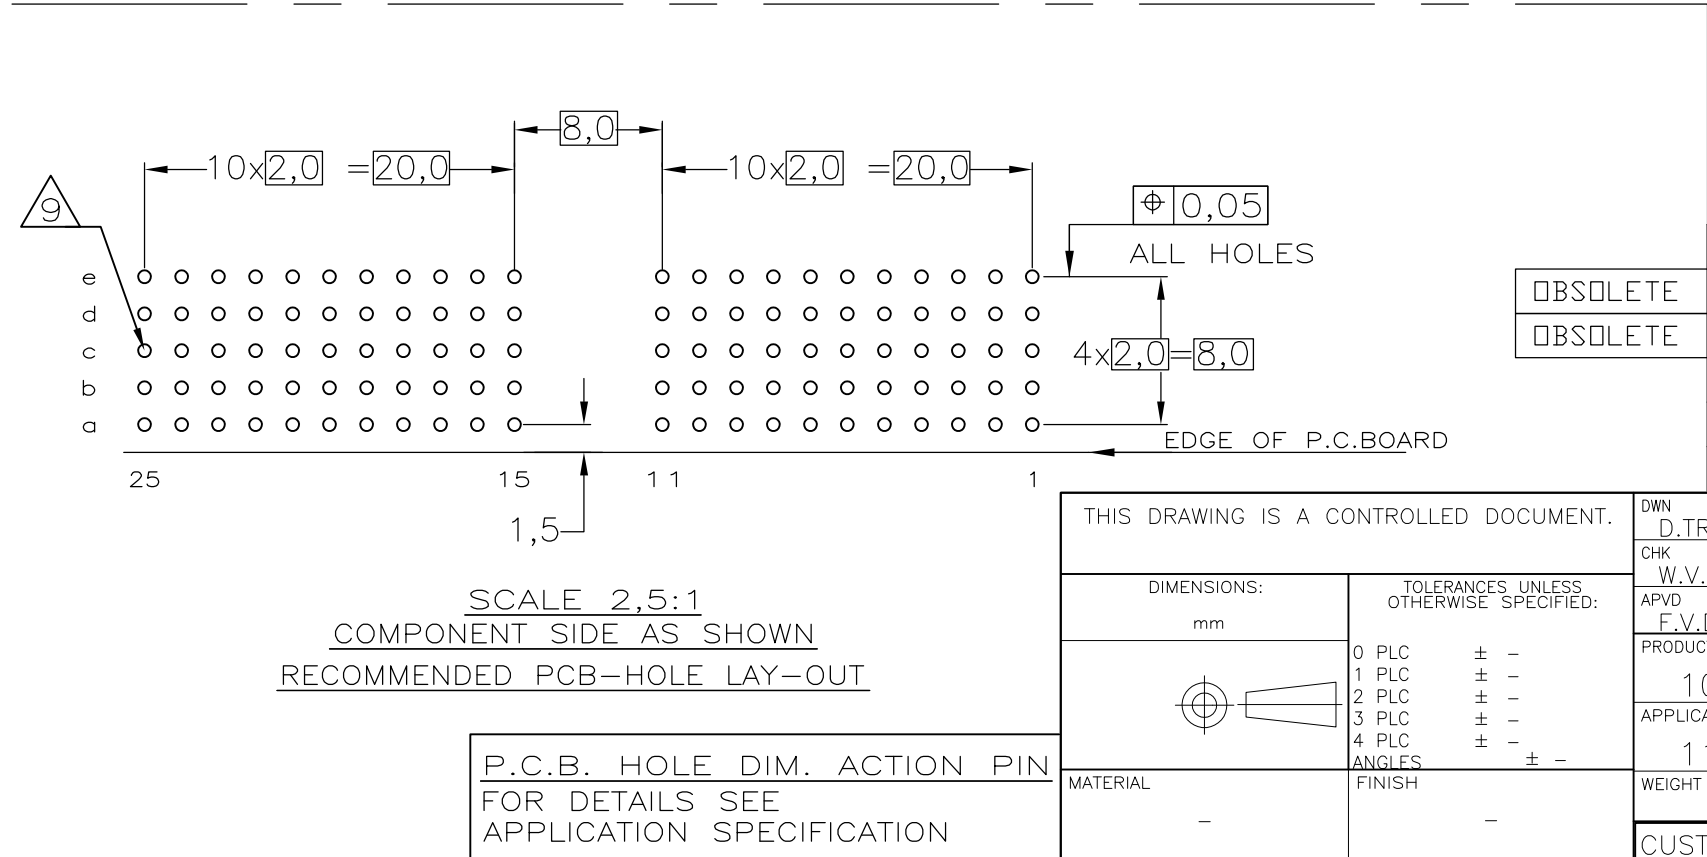

OBSOLETE	3	13	1	3-100147-0	13
OBSOLETE	6	7	1	1-100147-9	13
	5	7		100147-9	13
	4			100147-4	
	3			100147-1	13
FINISH			MATERIAL		PARTNUMBER
D.TRUREN			TE Connectivity		
W.V.D.HEIJDEN			Z-PACK 2mm HM TYPE A		
F.V.D.KONINGSBRUGGE			110 POS. FEMALE CONNECTOR		
108-19082			-		
114-19029			-		
0.000000			-		
CUSTOMER DRAWING			-		