
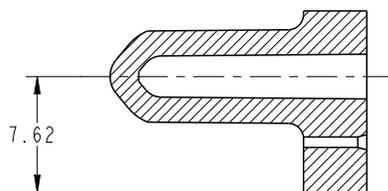
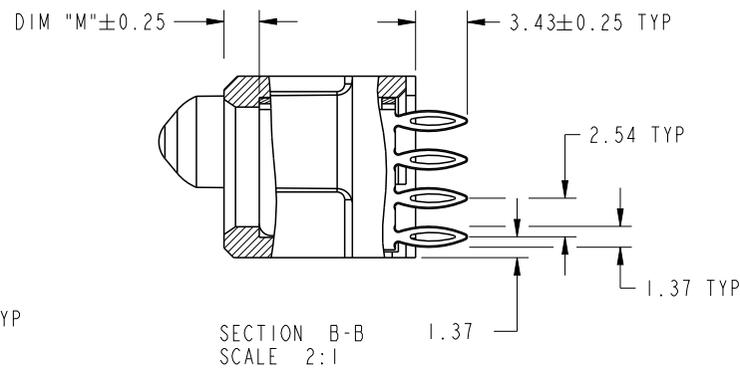


PRODUCT NUMBER

51750-134__
NOTE: 3

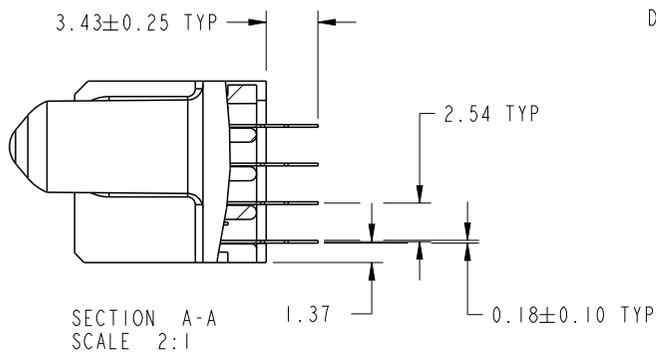

SECTION C-C
SCALE 2:1


| | | | | | | | | | |
|-------------|----------------|------------|--|------------------------|-----------|-----------|--------------|-----|---|
| dr | Ruan MT | 2013/05/14 | projection | MM | size | A4 | scale | 1:1 | |
| eng | Ruan MT | 2013/05/29 | | | ecn no | - | | | |
| chr | - | - | | | rel level | Released | | | |
| appr | Pei-Ming Zheng | 2013/05/29 | product family | PwrBlade | | | | | |
| | | title | 6P + 48S + 5P VERTICAL PRESS-FIT RECEPT | | dwg no | 51750-134 | | rev | A |
| www.fci.com | | cat. no. | * | Product - Customer Drw | | | sheet 2 of 4 | | |



Copyright FCI.

PRODUCT NUMBER

51750-134__
NOTE: 3

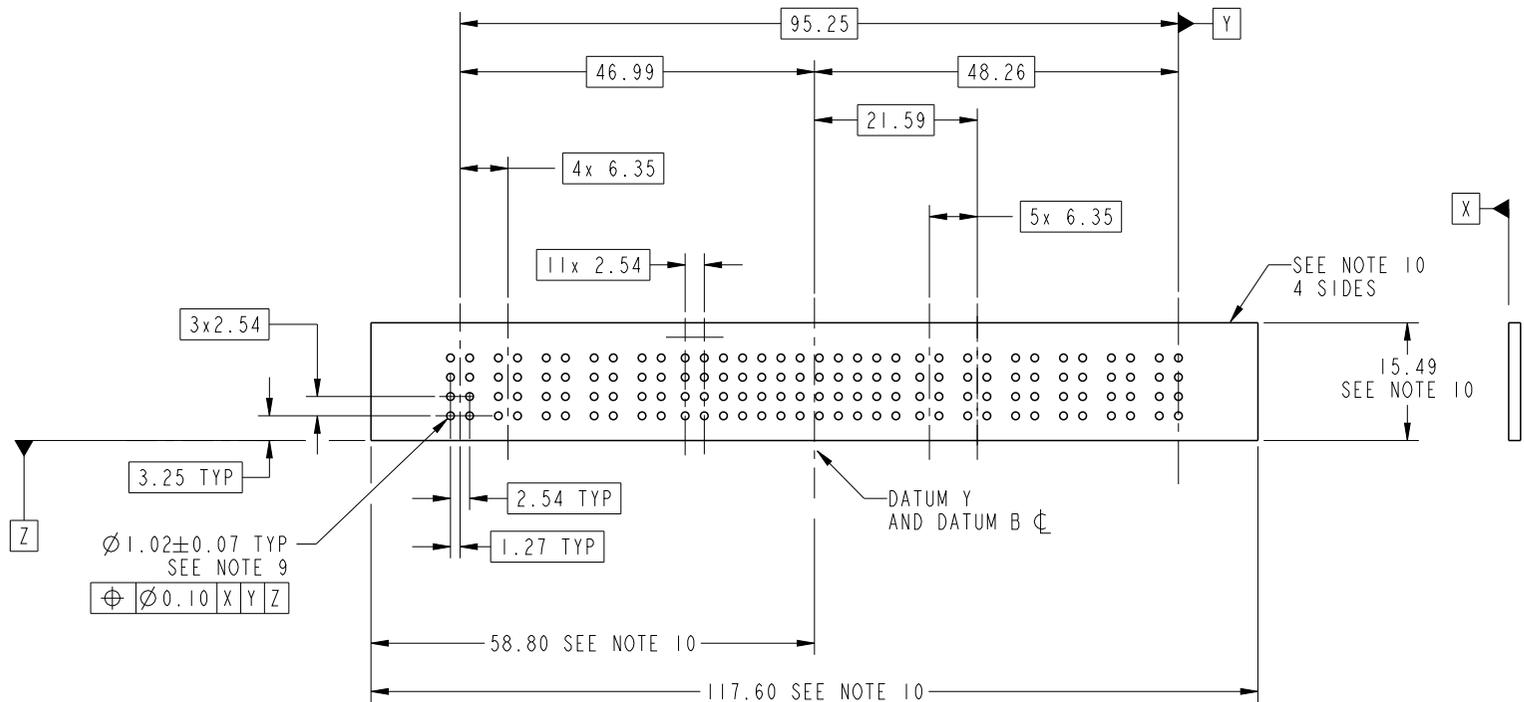

RECOMMENDED PCB LAYOUT

| | | | | | | | | | | | |
|-------------|----------------|------------|----------------|----------|---------------|----------|------------------------|-----|--------------|-----|---|
| dr | Ruan MT | 2013/05/14 | projection | MM | size | A4 | scale | 1:1 | | | |
| eng | Ruan MT | 2013/05/29 | | | ecn no | - | | | | | |
| chr | - | - | | | rel level | Released | | | | | |
| appr | Pei-Ming Zheng | 2013/05/29 | product family | PwrBlade | | | | | | | |
| | | title | | | 6P + 48S + 5P | | dwg no | | 51750-134 | rev | A |
| www.fci.com | | cat. no. | | | * | | Product - Customer Drw | | sheet 3 of 4 | | |

PRODUCT NUMBER

51750-134__
NOTE: 3

NOTES:

1. DIMENSIONS AND TOLERANCES ARE IN ACCORDANCE WITH ASME Y14.5M, 1994 UNLESS OTHERWISE SPECIFIED.

CONNECTOR NOTES:

- 2 HOUSING MATERIAL: UL 94 V-0 GLASS FILLED HIGH-TEMP THERMOPLASTIC
POWER CONTACT MATERIAL: COPPER ALLOY
SIGNAL PIN MATERIAL: COPPER ALLOY
- 3. SEE ITEM 7 & 8 IN PRINT 10064183 FOR PLATING SPEC OF 51750-134 AND 51750-134LF RESPECTIVELY.
- 4 MANUFACTURER'S NAME, DATE CODE AND OPTIONAL P/N TO APPEAR ON THIS SURFACE. THE MARK CAN BE OMITTED IF THERE IS NOT ENOUGH SPACE ON THIS SURFACE.
- 5. PRODUCT SPECIFICATION GS-12-149.
APPLICATION SPECIFICATION BUS-20-067.
- 6. PACKAGED IN TRAYS.
- PCB NOTES:
- 7. ALL HOLE DIAMETERS ARE FINISHED HOLE SIZE.
- 8 MOUNTING HOLES, WHERE APPLICABLE, ARE UNPLATED.
- 9 $\varnothing 1.151 \pm 0.025$ DRILLED HOLES PLATED WITH
0.008 MIN SnPb OR Sn OVER 0.03
TO 0.08 Cu PLATING TO ACHIEVE
 $\varnothing 1.02 \pm 0.07$ HOLE.
- 10 CONNECTOR KEEP-OUT ZONE.
- 11. THE VOID CORING IN BETWEEN POWER MODULES, SIGNAL MODULES AND END MODULES ARE OPTIONAL AND THE SHAPE MAY BE DIFFERENT FOR OPTIMIZE THE MOLDING PROCESS. THE VOID CORING WILL NOT EFFECT TO PRODUCT FUNCTION.



Copyright FCI.

| | | | | | | | | |
|-------------|----------------|---------------|------------------------|----------|-----------|--------------|-------|-----|
| dr | Ruan MT | 2013/05/14 | projection | MM | size | A4 | scale | 1:1 |
| eng | Ruan MT | 2013/05/29 | | | ecn no | - | | |
| chr | - | - | | | | | | |
| appr | Pei-Ming Zheng | 2013/05/29 | product family | PwrBlade | rel level | Released | | |
| | title | 6P + 48S + 5P | | dwg no | 51750-134 | | rev | A |
| www.fci.com | cat. no. | * | Product - Customer Drw | | | sheet 4 of 4 | | |