


CUSTOMER DRAWING

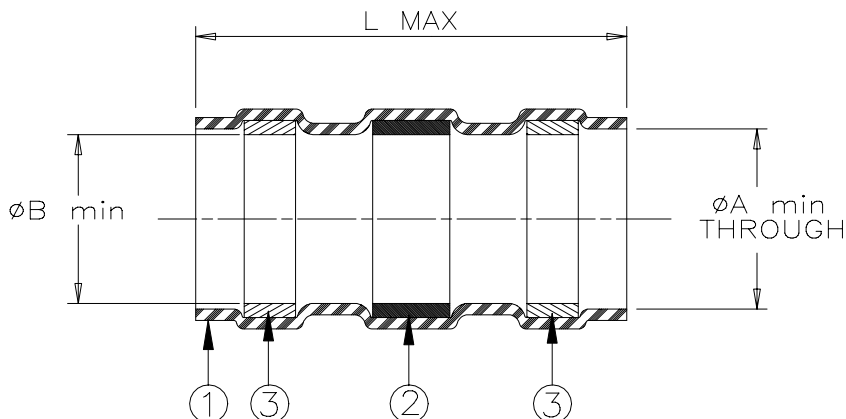


Product Name	Product Dimensions		
	ØA min	ØB min	L max
B-023-00	4.3	5.6	31
B-023-01	5.5	5.5	41
B-023-02	7.0	8.13	39
B-023-03	10.5	10.5	45
B-023-04	2.4	3	19
B-023-07	3.1	4.5	29

MATERIALS

1. INSULATION SLEEVE: Heat-shrinkable, transparent clear, modified polytetrafluorethylene.
2. SOLDER PREFORM WITH FLUX:
 SOLDER: TYPE Pb93 per ANSI-J-STD-006.
 FLUX: TYPE ROM1 per ANSI-J-STD-004.
3. MELTABLE SEALING RINGS: Modified fluorinated ethylene propylene.

APPLICATION

1. These controlled soldering devices are designed for termination of a nickel plated copper shield of a cable having an insulation rated for at least 200°C continuous.
2. Temperature range: -65°C to +260°C. For cable preparation and installation tool, consult RPIP-666-00.

 Tyco Electronics		Tyco Electronics 300 Constitution Dr Menlo Park, CA 94025, U.S.A.		TITLE: SOLDERSLLEEVE DEVICE SHIELD TERMINATION HIGH TEMPERATURE	
Unless otherwise specified dimensions are in millimeters. [Inches dimensions are shown in brackets]		Raychem Devices		DOCUMENT NO.: B-023-0X	
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A ROUGHNESS IN MICRON	Tyco Electronics reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		REV: A	DATE: 27-Aug-07
DRAWN BY: P.TALLY	CAGE CODE: 06090	FILE: B-023-0X_CD	ECO: 07-020120	SCALE: NTS	SIZE: A
				SHEET: 1 of 1	

If this document is printed it becomes uncontrolled. Check for the latest revision.

© 2007 Tyco Electronics Corporation. All rights reserved