


# CUSTOMER DRAWING

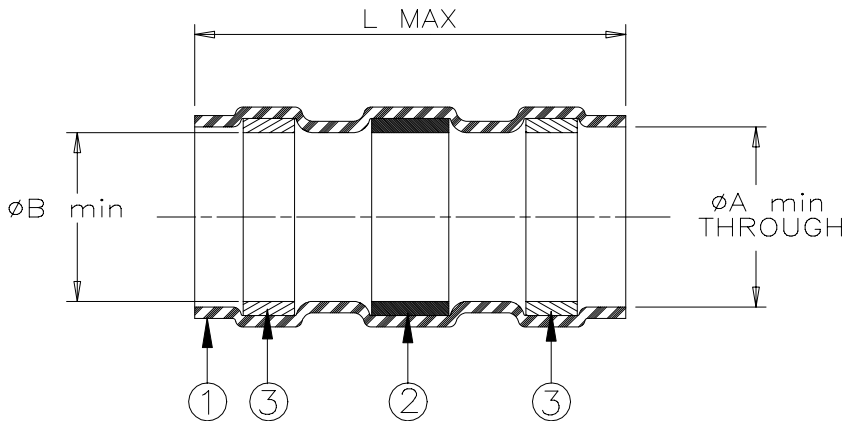

Product Name	Product Dimensions		
	øA min	øB min	L max
B-023-00	4.3	5.6	31
B-023-01	5.5	5.5	41
B-023-02	7.0	8.13	39
B-023-03	10.5	10.5	45
B-023-04	2.4	3	19
B-023-07	3.1	4.5	29

## MATERIALS

- INSULATION SLEEVE: Heat-shrinkable, transparent clear, modified polytetrafluorethylene.
- SOLDER PREFORM WITH FLUX:  
 SOLDER: TYPE Pb93 per ANSI-J-STD-006.  
 FLUX: TYPE ROM1 per ANSI-J-STD-004.
- MELTABLE SEALING RINGS: Modified fluorinated ethylene propylene.

## APPLICATION

- These controlled soldering devices are designed for termination of a nickel plated copper shield of a cable having an insulation rated for at least 200°C continuous.
- Temperature range: -65°C to +260°C. For cable preparation and installation tool, consult RPIP-666-00.

		Tyco Electronics 300 Constitution Dr Menlo Park, CA 94025, U.S.A.		TITLE: <b>SOLDERSLEEVE DEVICE SHIELD TERMINATION                  HIGH TEMPERATURE</b>		
Unless otherwise specified dimensions are in millimeters. [Inches dimensions are shown in brackets]		Raychem Devices		DOCUMENT NO.: <b>B-023-0X</b>		
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A ROUGHNESS IN MICRON	Tyco Electronics reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		REV: <b>A</b>	DATE: <b>27-Aug-07</b>	
DRAWN BY: <b>P.TALLY</b>	CAGE CODE: <b>06090</b>	FILE: <b>B-023-0X_CD</b>	ECO: <b>07-020120</b>	SCALE: <b>NTS</b>	SIZE: <b>A</b>	SHEET: <b>1 of 1</b>

If this document is printed it becomes uncontrolled. Check for the latest revision.

© 2007 Tyco Electronics Corporation. All rights reserved