


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1460068	2014/06/18	Tom	Change Panel Thickness

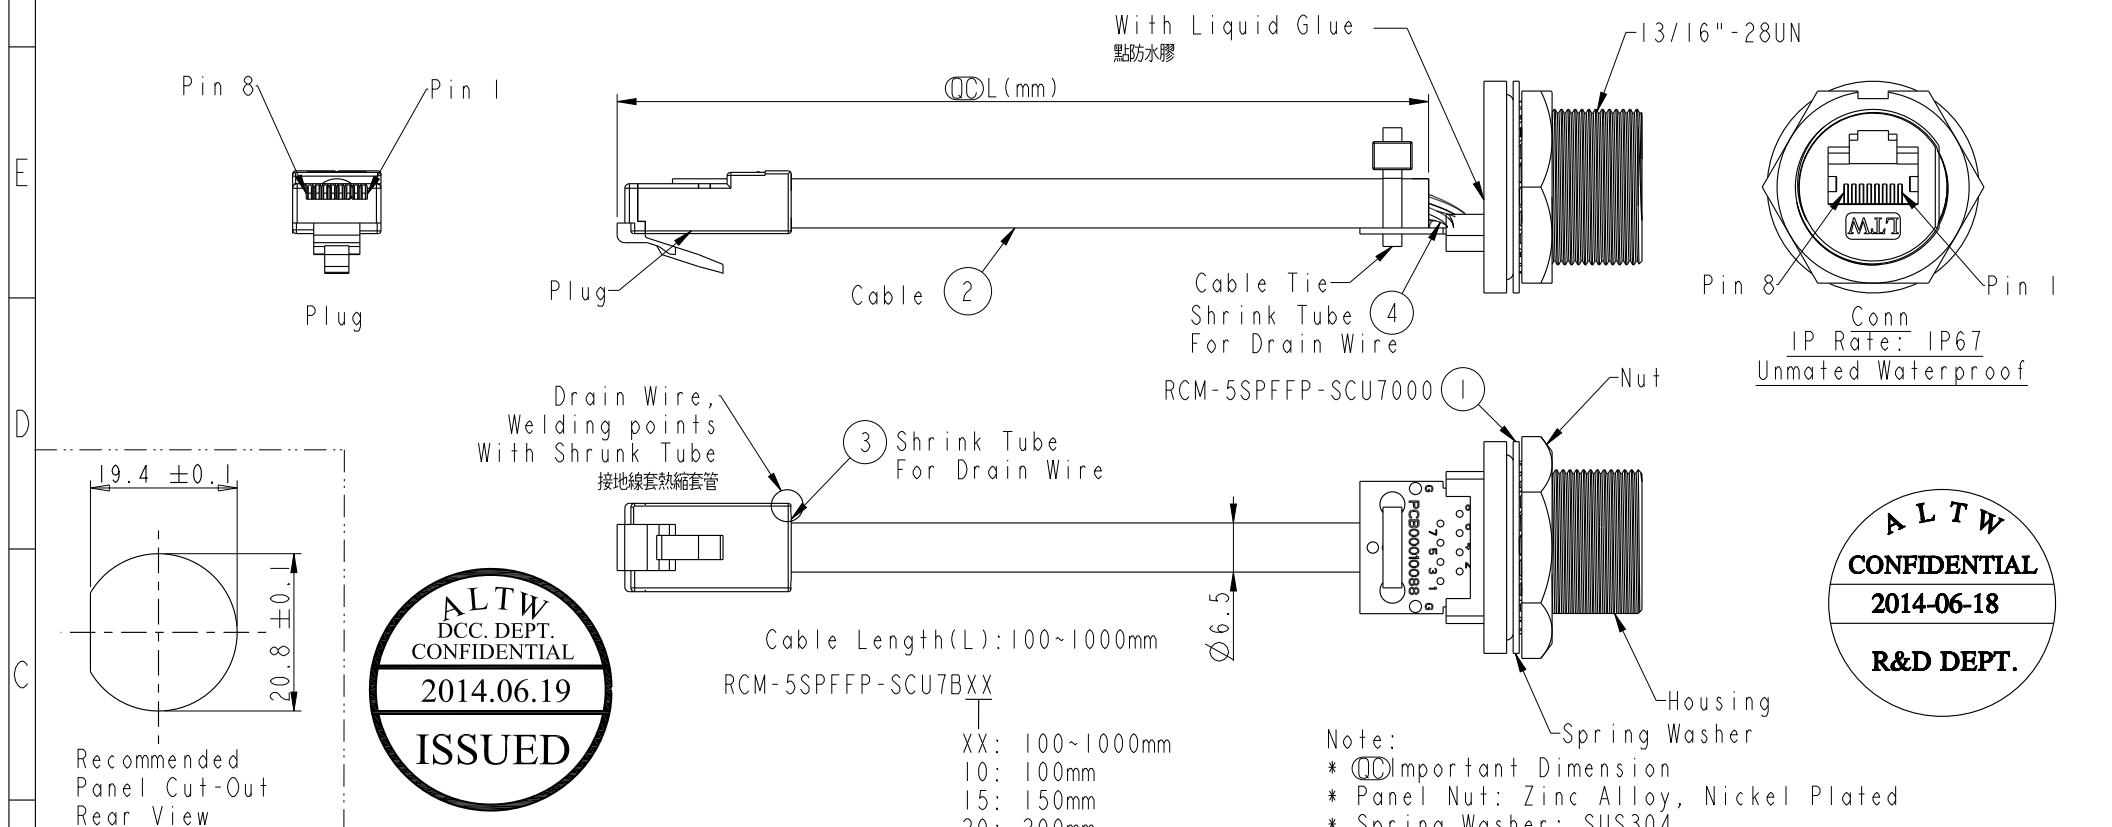

Shield	Drain Wire	地線	Shield
8	Brown	棕	8
7	Brown /White	棕/白	7
6	Green	綠	6
5	Blue/White	藍/白	5
4	Blue	藍	4
3	Green/White	綠/白	3
2	Orange	橘	2
1	Orange/White	橘/白	1
Plug	Wire Color	Conn.2	

Twist 對線

Twist 對線

Twist 對線

Cable Length(L):100~1000mm

RCM-5SPFFP-SCU7BXX

XX: 100~1000mm
10: 100mm
15: 150mm
20: 200mm
I
95: 950mm
A0: 1000mm

Cable length	Tolerance
0.0~100 mm	±10 mm
101~300 mm	±15 mm
301~1000 mm	±20 mm

- Note:
- * $\varnothing$ Important Dimension
 - * Panel Nut: Zinc Alloy, Nickel Plated
 - * Spring Washer: SUS304
 - * O-Ring: Silicone, Gray_Black
 - * Housing: Zinc Alloy, Nickel Plated
 - * Use with waterproof cap or dust cap for Panel Thickness Max: 3.0mm
 - * Use without waterproof cap or dust cap for Panel Thickness Max: 4.2mm
 - * Plug: 8P8C, Gold Plated, Shielded
 - * Recommend Force: 8~10kg-cm
 - * Cable: CAT5E FTP 24AWG*4P+My+Drain+ Al/My(UV Resistant), OD=6.5mm, Black

UNIT:mm		TITLE	RJ45,C SIZE,PCB W/CABLE		
TOLERANCE		SCALE	1:1	SIZE	A4
.X ±0.25		REV.	B	WC-REV.	A.4
.XX ±0.1					
.XXX ±0.05					
ANGLES ±1°					

Amphenol LTW		ITEM NO	DRAWN BY	DATE
安費諾亮泰企業股份有限公司		DWG NO	Tom	2014-06-18
		RCM-5SPFFP-SCU7BXX	CHECKED BY	DATE
			Jerry	2014-06-18
		CUSTOMER	APPROVED BY	DATE
		ALTW	Victor	2014-06-18