

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVO
GP	00						
			A	ORIGINAL	03APR2013	CJV	CWR

D

C

B

A

D

C

B

A

- 1

FOR MINI-APPLICATOR AND STRIPPER CRIMPER.
- 2

FOR HAND TOOL USE ONLY.
- 3




WIRE RANGE OF 24-28, INSULATION RANGE OF .030-.040.
- 4

GOLD PLATING MAY NOT APPEAR ON CARRIER STRIP. NICKEL UNDERPLATE COVERS ENTIRE CONTACT.
- 5


GOLD PLATING PER MIL-G-45204, NICKEL PLATING PER QQ-N-290.
- 6

PLATED WITH .000050 GOLD ON INSIDE OF LOCALIZED GOLD PLATE AREA, .000050 GOLD ON ZONE 1, ALL OVER .000050 NICKEL UNDERPLATE.
- 7

PLATED WITH .000050 GOLD ON INSIDE OF LOCALIZED GOLD PLATE AREA, GOLD FLASH ON ZONE 1, ALL OVER .000050 NICKEL UNDERPLATE.

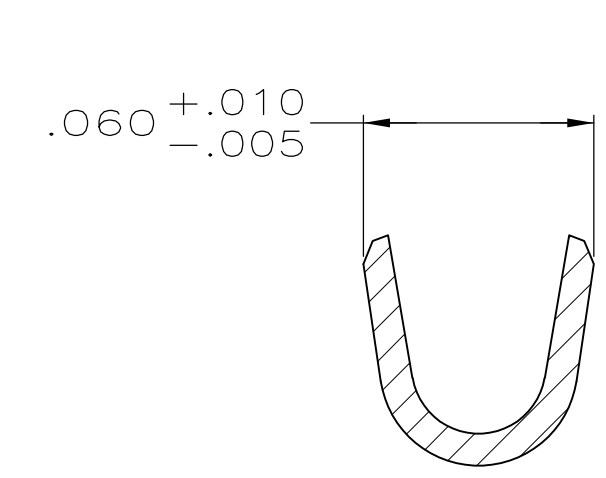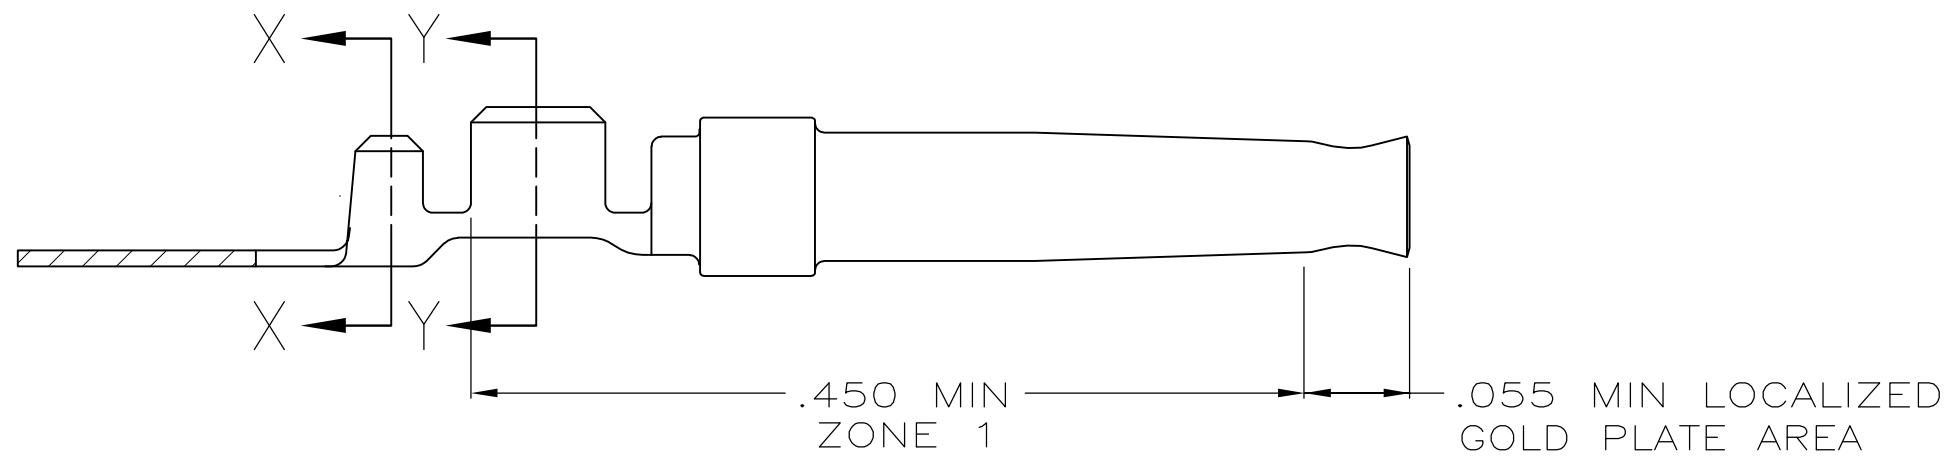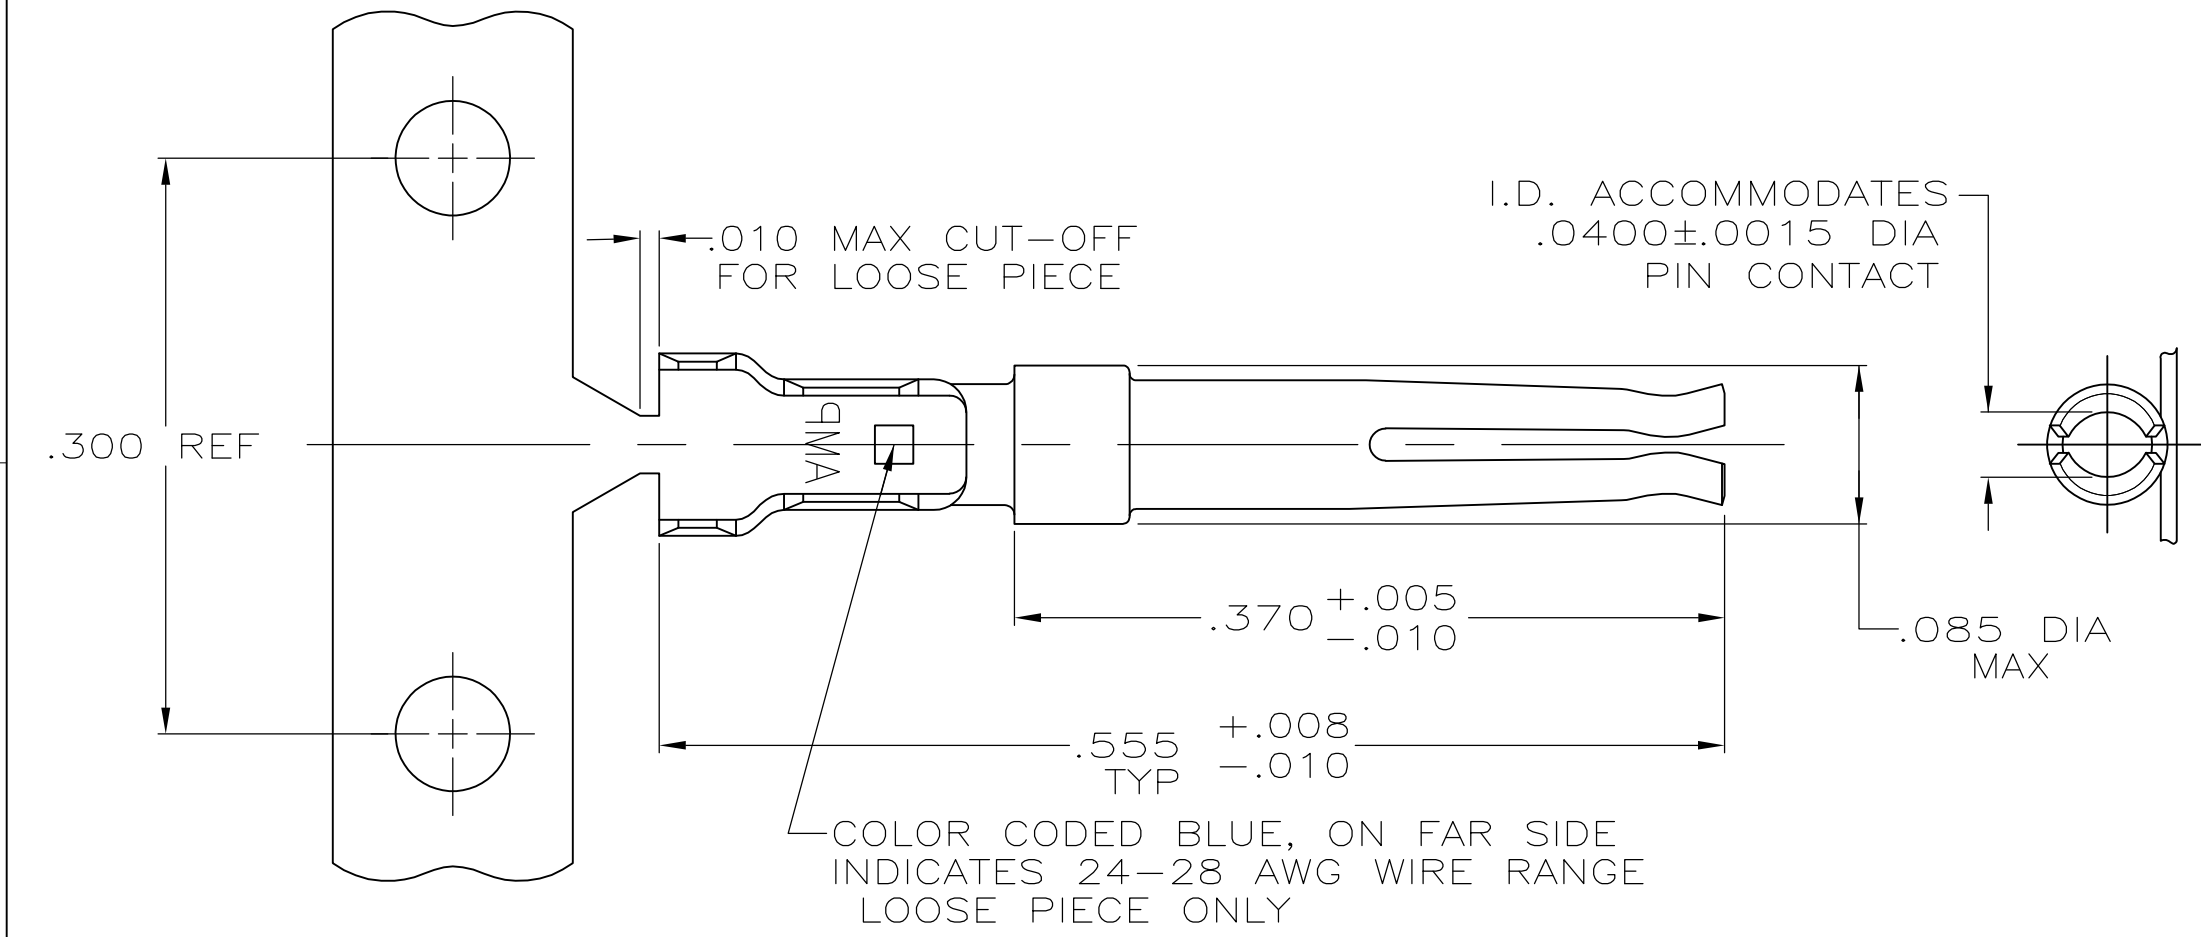

SECTION X-X
SCALE 20:1

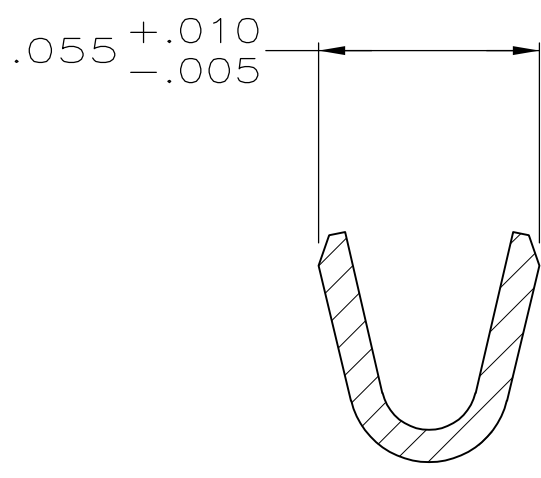

SECTION Y-Y
SCALE 20:1

STANDARD	7	1	STRIP	2-66505-7
STANDARD	6	2	LOOSE PIECE	66505-8
STANDARD	6	1	STRIP	66505-2
PACKAGING TYPE	FINISH	USE	TYPE	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT. DIMENSIONING AND TOLERANCING PER ASME Y14.5M-2009		DWN C. VALENTINE 03APR2013	 TE Connectivity			
		CHK C. ROHDE 03APR2013				
DIMENSIONS: INCHES		APVD C. ROHDE 03APR2013	NAME			
		PRODUCT SPEC —	SOCKET CONTACT, SIZE 20 DF, 24–28 AWG, W/ .030–.040 DIA INSULATION SUPPORT,			
		APPLICATION SPEC 114–10000				
MATERIAL PHOSPHOR BRONZE		WEIGHT —	SIZE A2	CAGE CODE 00779	DRAWING NO C=66505–2	RESTRICTED TO —
FINISH  SEE TABLE		CUSTOMER DRAWING			SCALE 10:1	SHEET 1 of 1
					REV A	