
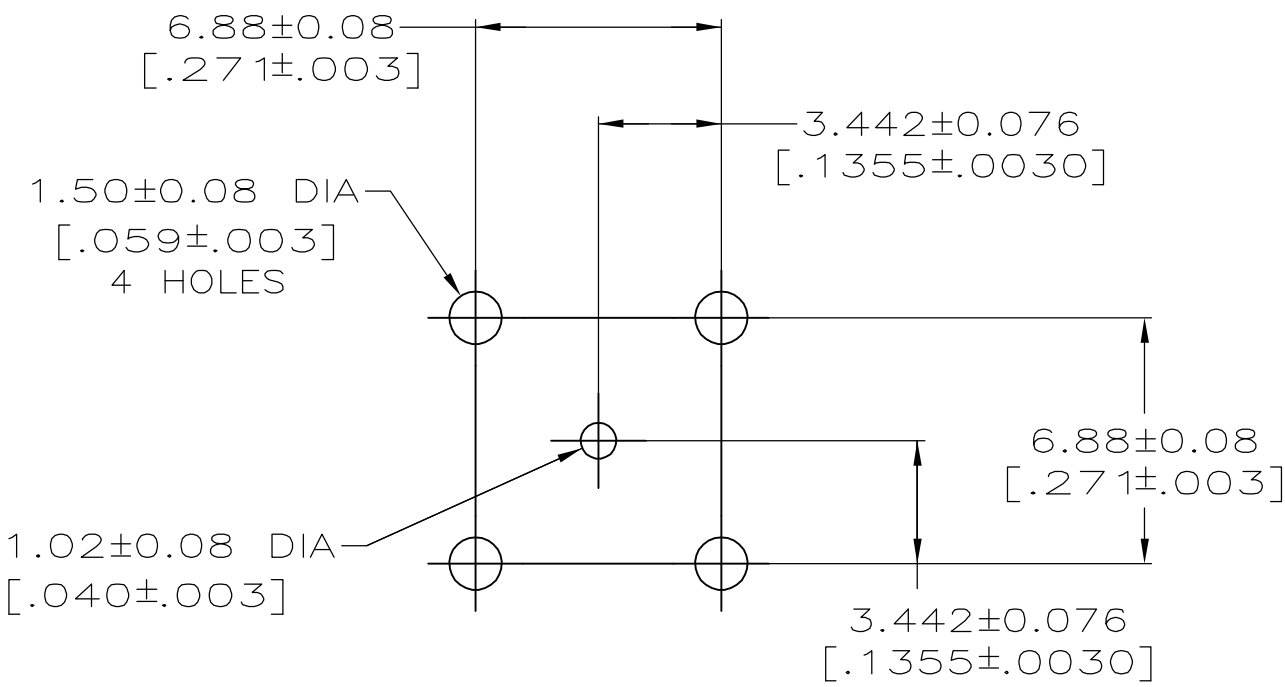
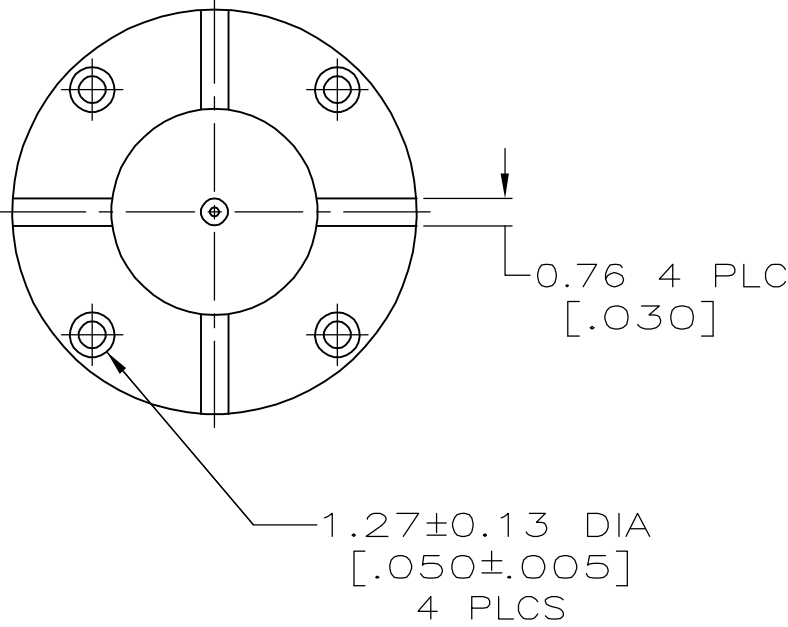


LOC	DIST	REVISIONS				
AJ	16	P	LTR	DESCRIPTION	DATE	DWN
			G	REVISED PER ECO-05-008689	06SEP05	JL

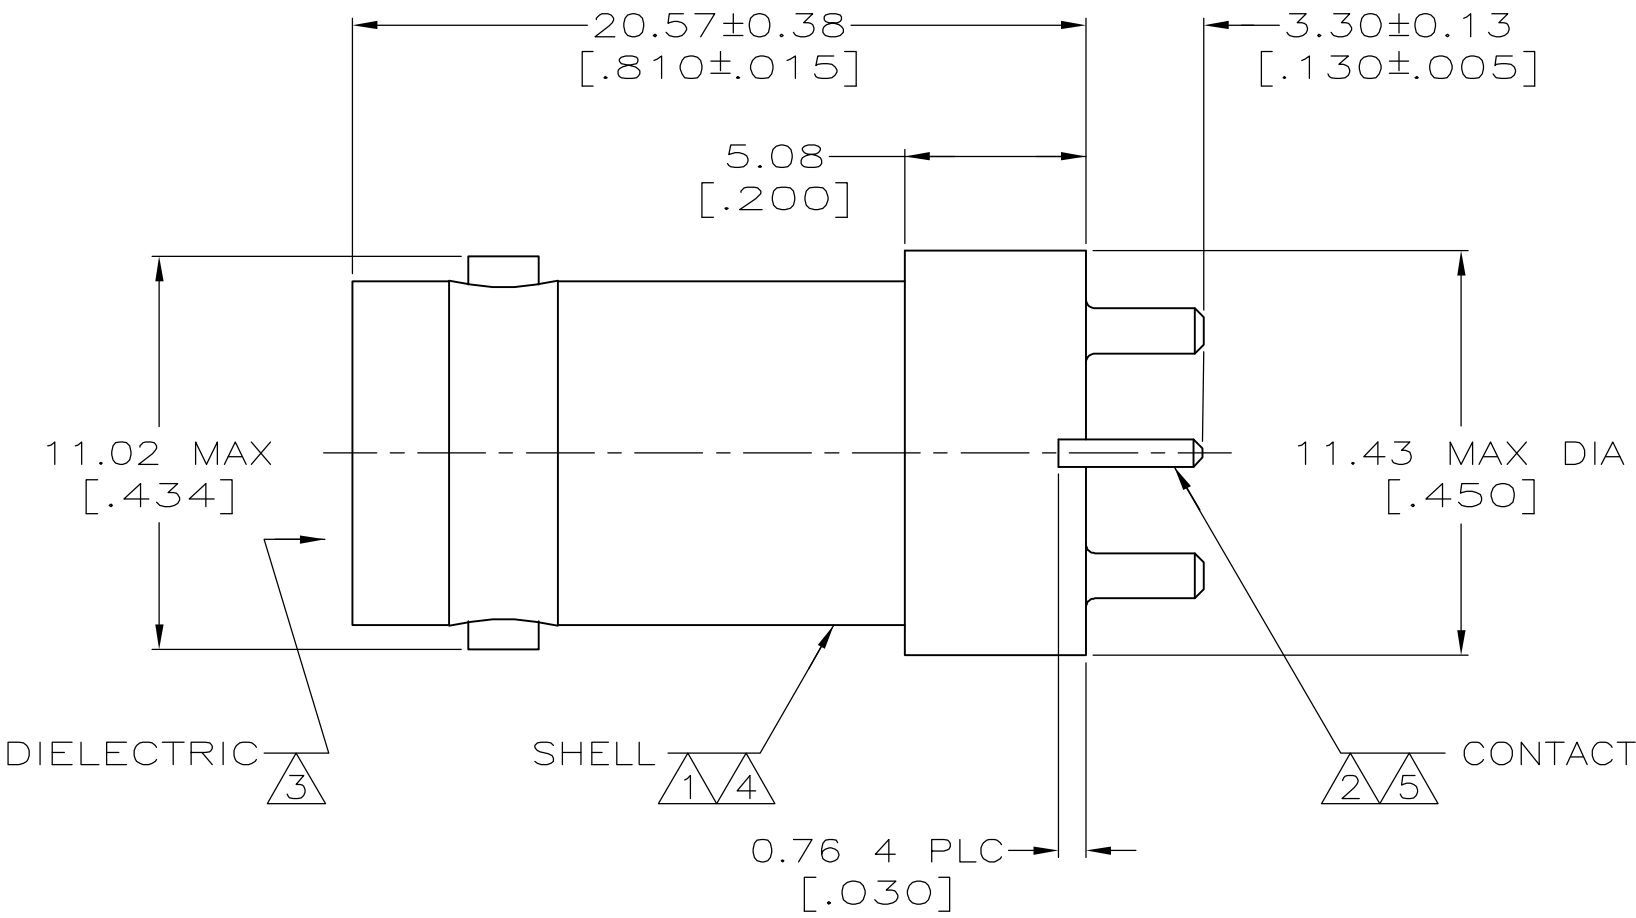

PCB CONFIGURATION

- 1 ZINC PER QQ-Z-363.
- 2 BERYLLIUM COPPER PER ASTM-B-196.
- 3 PTFE PER MIL-P-19468.
- 4 TIN-LEAD PLATE PER ASTM-B-545, 3.05 μm [.000120] MINIMUM THICK.
- 5 GOLD PLATE PER MIL-G-45204 0.76 μm [.000030] MINIMUM THICK.
- 6. SEE INSTRUCTION SHEET 408-9889.

413969-2

PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. LIPPERT 10-8-90	tyco Electronics		Tyco Electronics Corporation Harrisburg, Pa 17105-3608		
DIMENSIONS: mm[INCHES]		CHK R. E. RUTH 10-16-90					
	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± 0.20 [.008] 3 PLC ± - 4 PLC ± - ANGLES ± ± - FINISH	APVD A. GABANY 10-16-90	NAME JACK, VERTICAL, PCB, 50 OHM, COMMERCIAL BNC				
		PRODUCT SPEC 108-12078					
		APPLICATION SPEC —	SIZE A2	CAGE CODE 00779	DRAWING NO C-413969	RESTRICTED TO —	
		MATERIAL SEE NOTES 1-3	WEIGHT —	CUSTOMER DRAWING			SCALE 5:1