

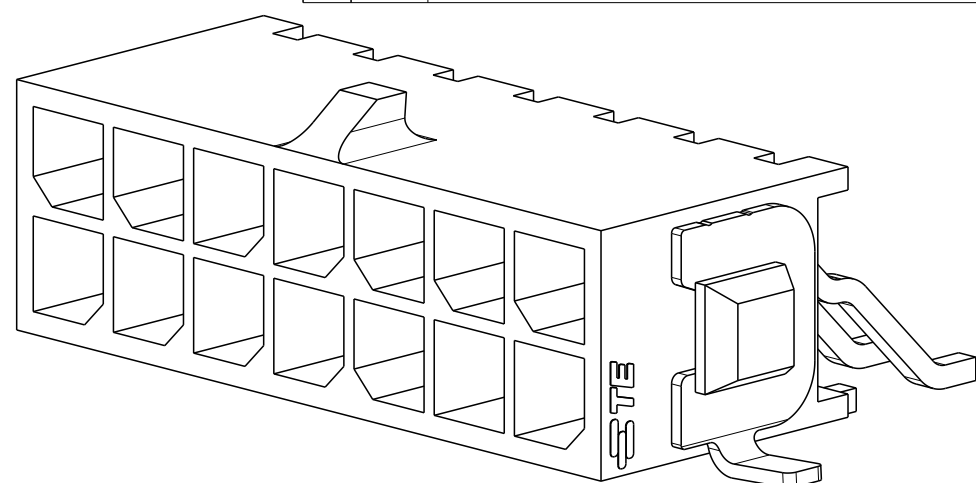


THIS DRAWING IS UNPUBLISHED.	RELEASED FOR PUBLICATION	20
© COPYRIGHT 20	BY -	ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	HI	REVISED PER ECR-16-011494	22JUN2017	NK	CX

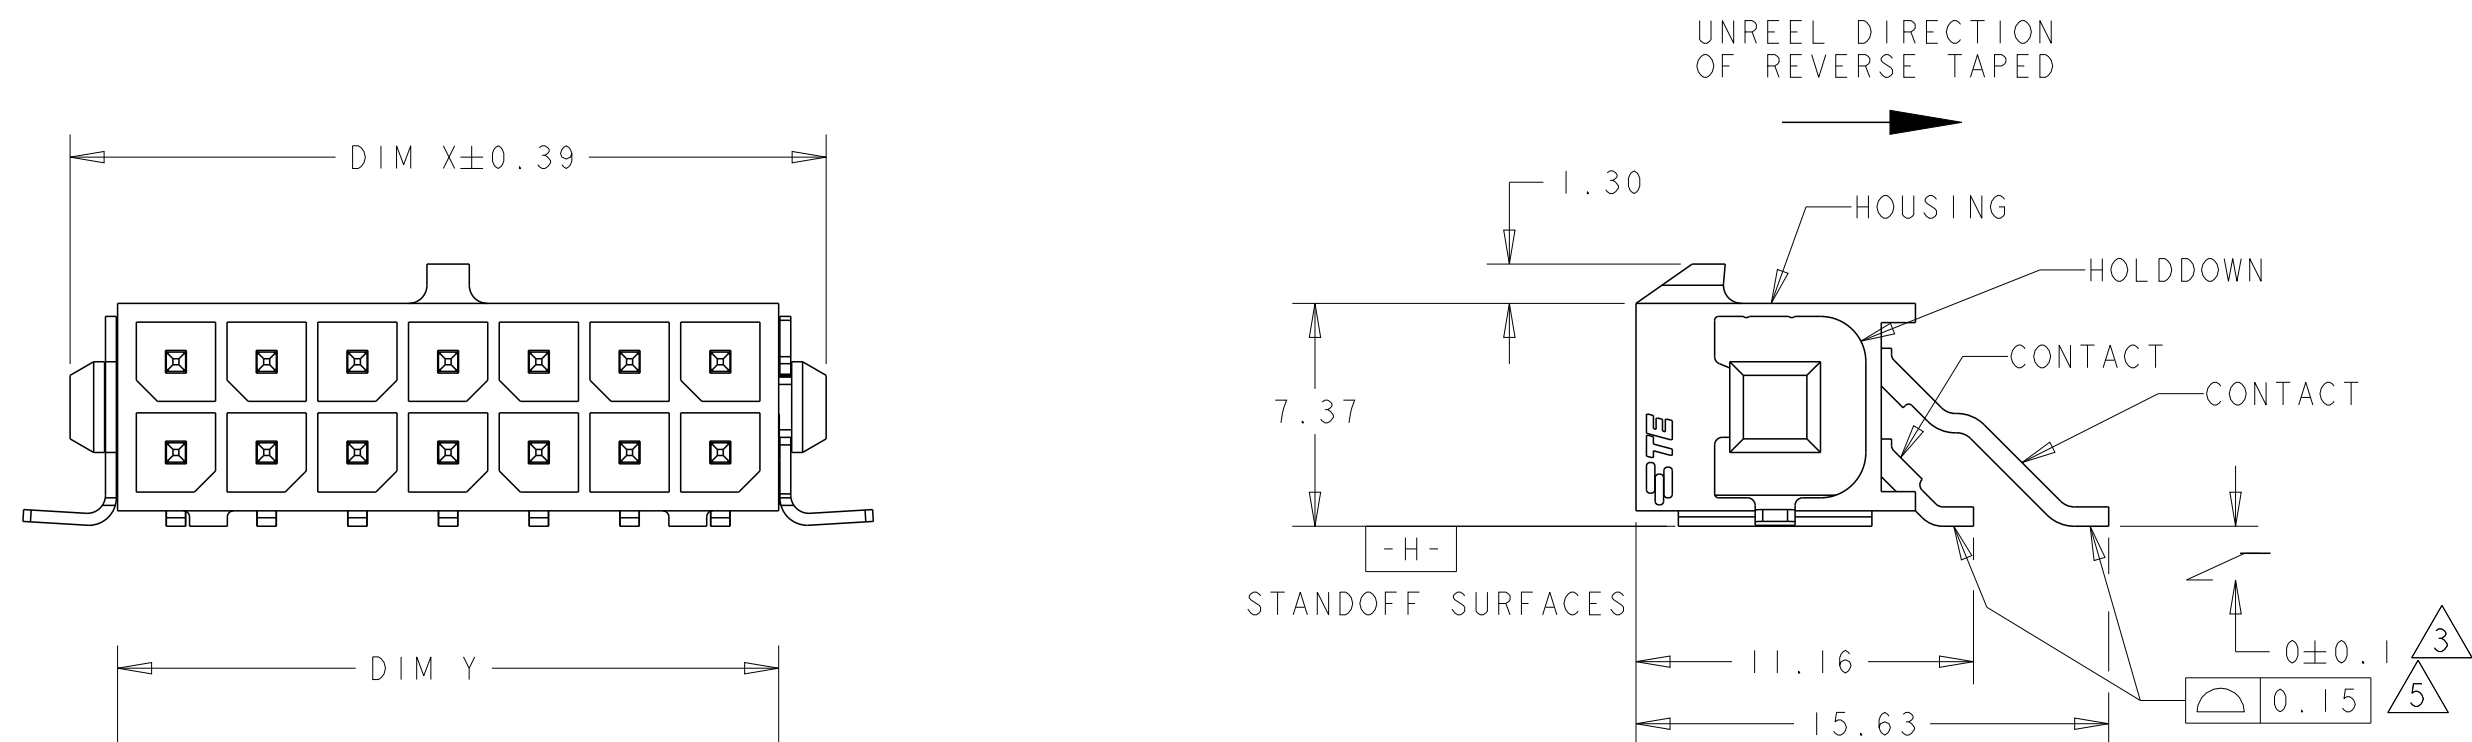

SCALE 5:1

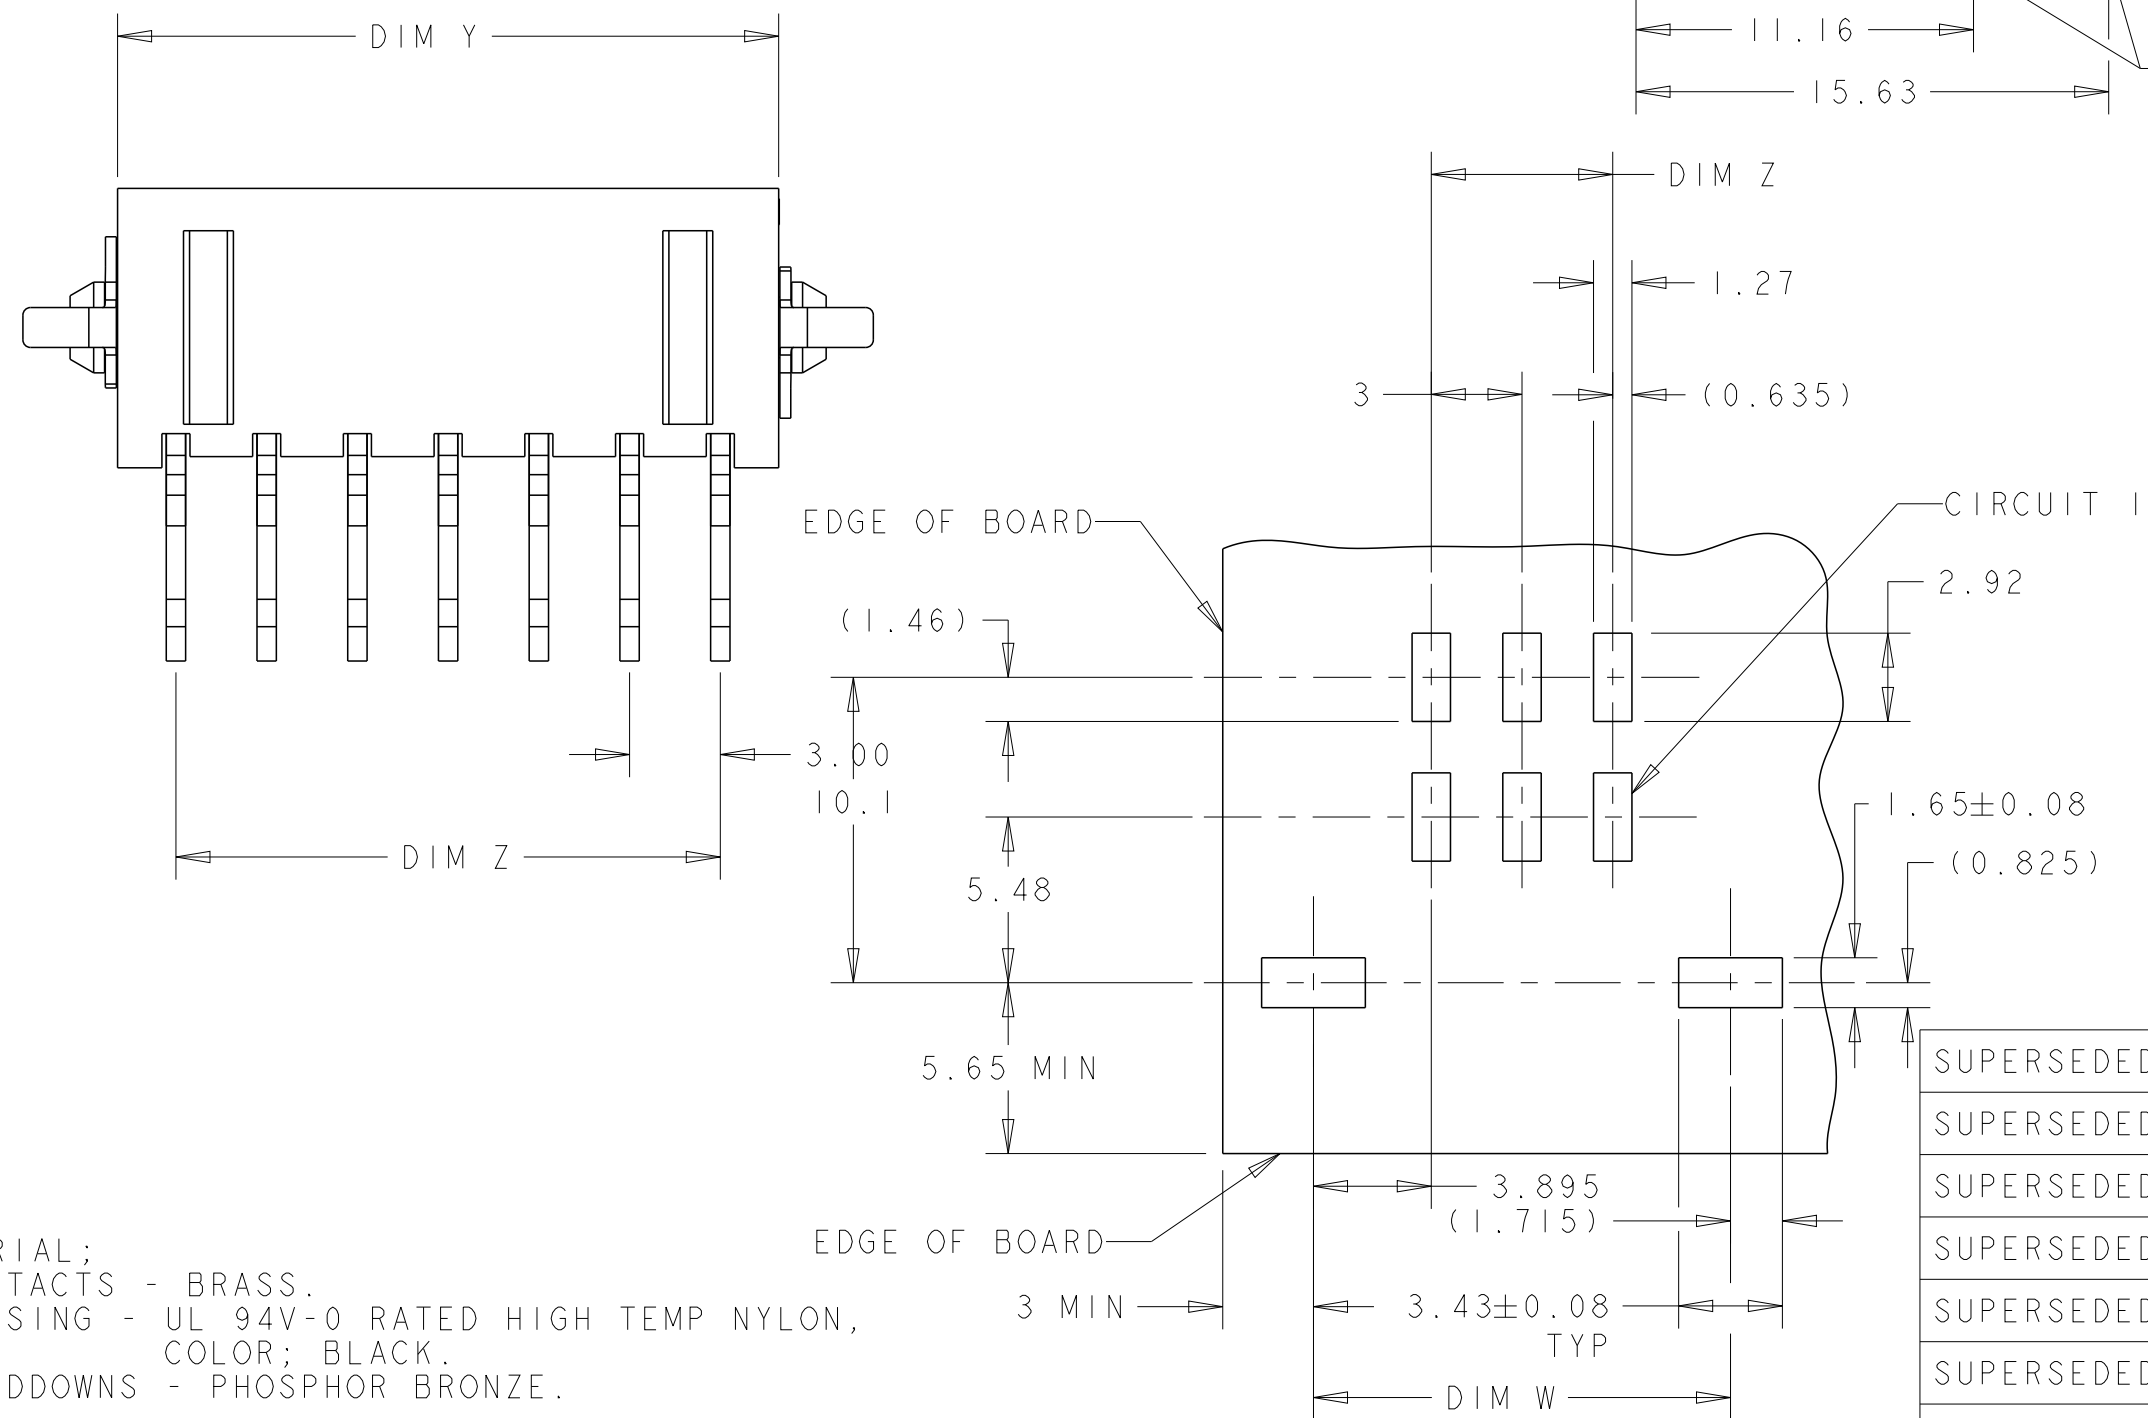

REVERSE TAPED		12.86	16.79	9.00	16.00	8	6-794629-8
REVERSE TAPED		6.86	10.79	3.00	10.00	4	6-794629-4
TAPED		36.86	40.79	33.00	40.00	24	5-794629-4
TAPED		33.86	37.79	30.00	37.00	22	5-794629-2
TAPED		30.86	34.79	27.00	34.00	20	5-794629-0
TAPED		27.86	31.79	24.00	31.00	18	4-794629-8
TAPED		24.86	28.79	21.00	28.00	16	4-794629-6
TAPED		21.86	25.79	18.00	25.00	14	4-794629-4
TAPED		18.86	22.79	15.00	22.00	12	4-794629-2
TAPED		15.86	19.79	12.00	19.00	10	4-794629-0
TAPED		12.86	16.79	9.00	16.00	8	3-794629-8
TAPED		9.86	13.79	6.00	13.00	6	3-794629-6
TAPED		6.86	10.79	3.00	10.00	4	3-794629-4
LOOSE PIECE		3.86	7.79	-	7.00	2	3-794629-2
TAPED		36.86	40.79	33.00	40.00	24	2-794629-4
TAPED		33.86	37.79	30.00	37.00	22	2-794629-2
TAPED		30.86	34.79	27.00	34.00	20	2-794629-0
TAPED		27.86	31.79	24.00	31.00	18	1-794629-8
TAPED		24.86	28.79	21.00	28.00	16	1-794629-6
TAPED		21.86	25.79	18.00	25.00	14	1-794629-4
TAPED		18.86	22.79	15.00	22.00	12	1-794629-2
TAPED		15.86	19.79	12.00	19.00	10	1-794629-0
TAPED		12.86	16.79	9.00	16.00	8	794629-8
TAPED		9.86	13.79	6.00	13.00	6	794629-6
TAPED		6.86	10.79	3.00	10.00	4	794629-4
LOOSE PIECE		3.86	7.79	-	7.00	2	794629-2
PACKAGING	FINISH	DIM Y	DIM W	DIM Z	DIM X	NO. OF POSN.	PART NUMBER

SUPERSEDED BY 5-794629-4
SUPERSEDED BY 5-794629-2
SUPERSEDED BY 5-794629-0
SUPERSEDED BY 4-794629-8
SUPERSEDED BY 4-794629-6
SUPERSEDED BY 4-794629-4
SUPERSEDED BY 4-794629-2
SUPERSEDED BY 4-794629-0
SUPERSEDED BY 3-794629-8
SUPERSEDED BY 3-794629-6
SUPERSEDED BY 3-794629-4
SUPERSEDED BY 3-794629-2

- EDGE OF
- 1 MATERIAL;
CONTACTS - BRASS.
HOUSING - UL 94V-0 RATED HIGH TEMP NYLON,
COLOR; BLACK.
HOLDDOWNS - PHOSPHOR BRONZE.
- 2 PLATING;
CONTACTS - 0.76 μ m MINIMUM GOLD OVER 2.54 μ m
MINIMUM NICKEL ON MATING AREA.
2.54 μ m TIN-LEAD MINIMUM OVER 2.54 μ m
NICKEL MINIMUM ON SOLDER TAIL.
HOLDDOWNS - 2.54 μ m TIN-LEAD.
- 3 DIMENSION APPLIES TO SOLDER TAIL SURFACES
AND STANDOFF SURFACES.
- 4 RECOMMENDED PC BOARD THICKNESS OF 1.57.
- 5 ALL SOLDER TAILS AND HOLDDOWNS.
- 6 PLATING;
CONTACTS - 0.76 μ m MINIMUM GOLD OVER 2.54 μ m
MINIMUM NICKEL ON MATING AREA.
2.54 μ m MATTE TIN MINIMUM OVER 2.54 μ m
NICKEL MINIMUM ON SOLDER TAIL.
HOLDDOWNS - 2.54 μ m MATTE TIN.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 9MAR2003 K. WHITAKER CHK 19MAR2003 C. JONES APVD 19MAR2003 C. JONES		 TE Connectivity	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ±0.13 3 PLC ± 4 PLC ± ANGLES ± MATERIAL		NAME SURFACE MOUNT, RIGHT ANGLE, SURFACE MOUNT HOLDDOWN, ASSEMBLY, 30 GOLD HEADER, DUAL ROW, MICRO MATE-N-LOK™	
		PRODUCT SPEC - APPLICATION SPEC -		SIZE CAGE CODE DRAWING NO RESTRICTED TO	
		WEIGHT -		A200779 C-794629 -	
SEE TABLE		CUSTOMER DRAWING		SCALE 4:1 SHEET 1 OF 1 REV HI	