




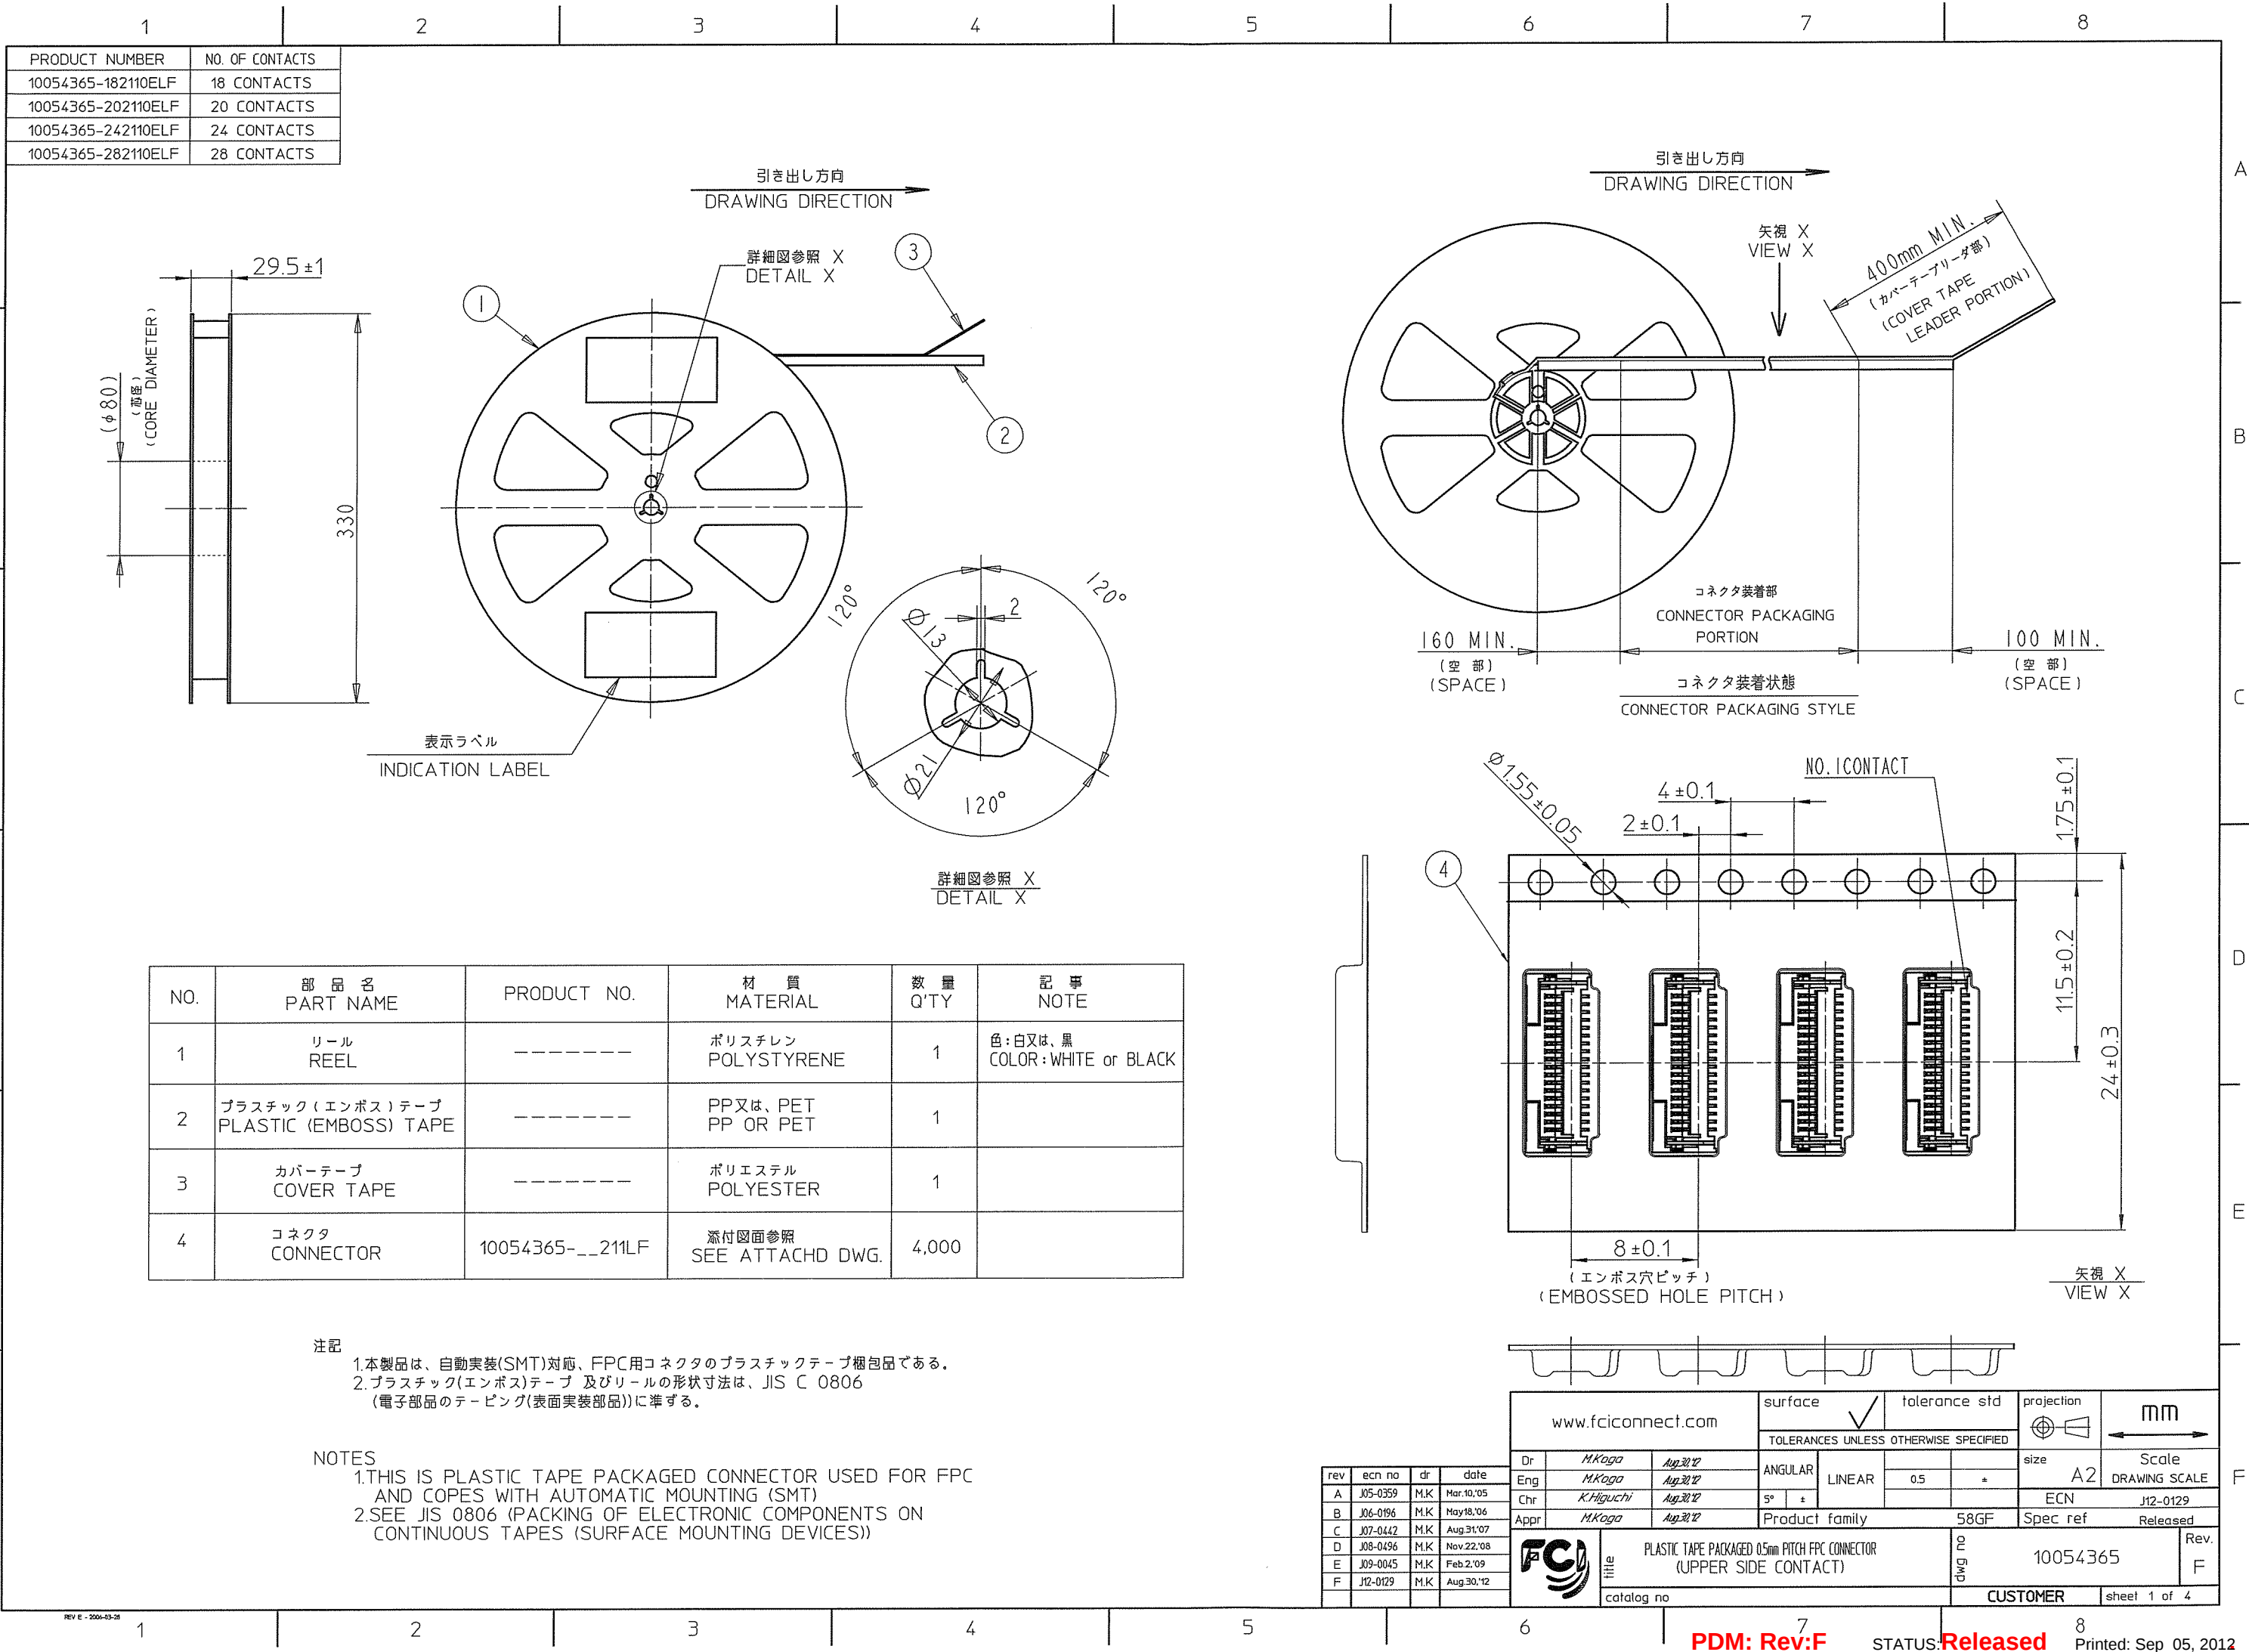

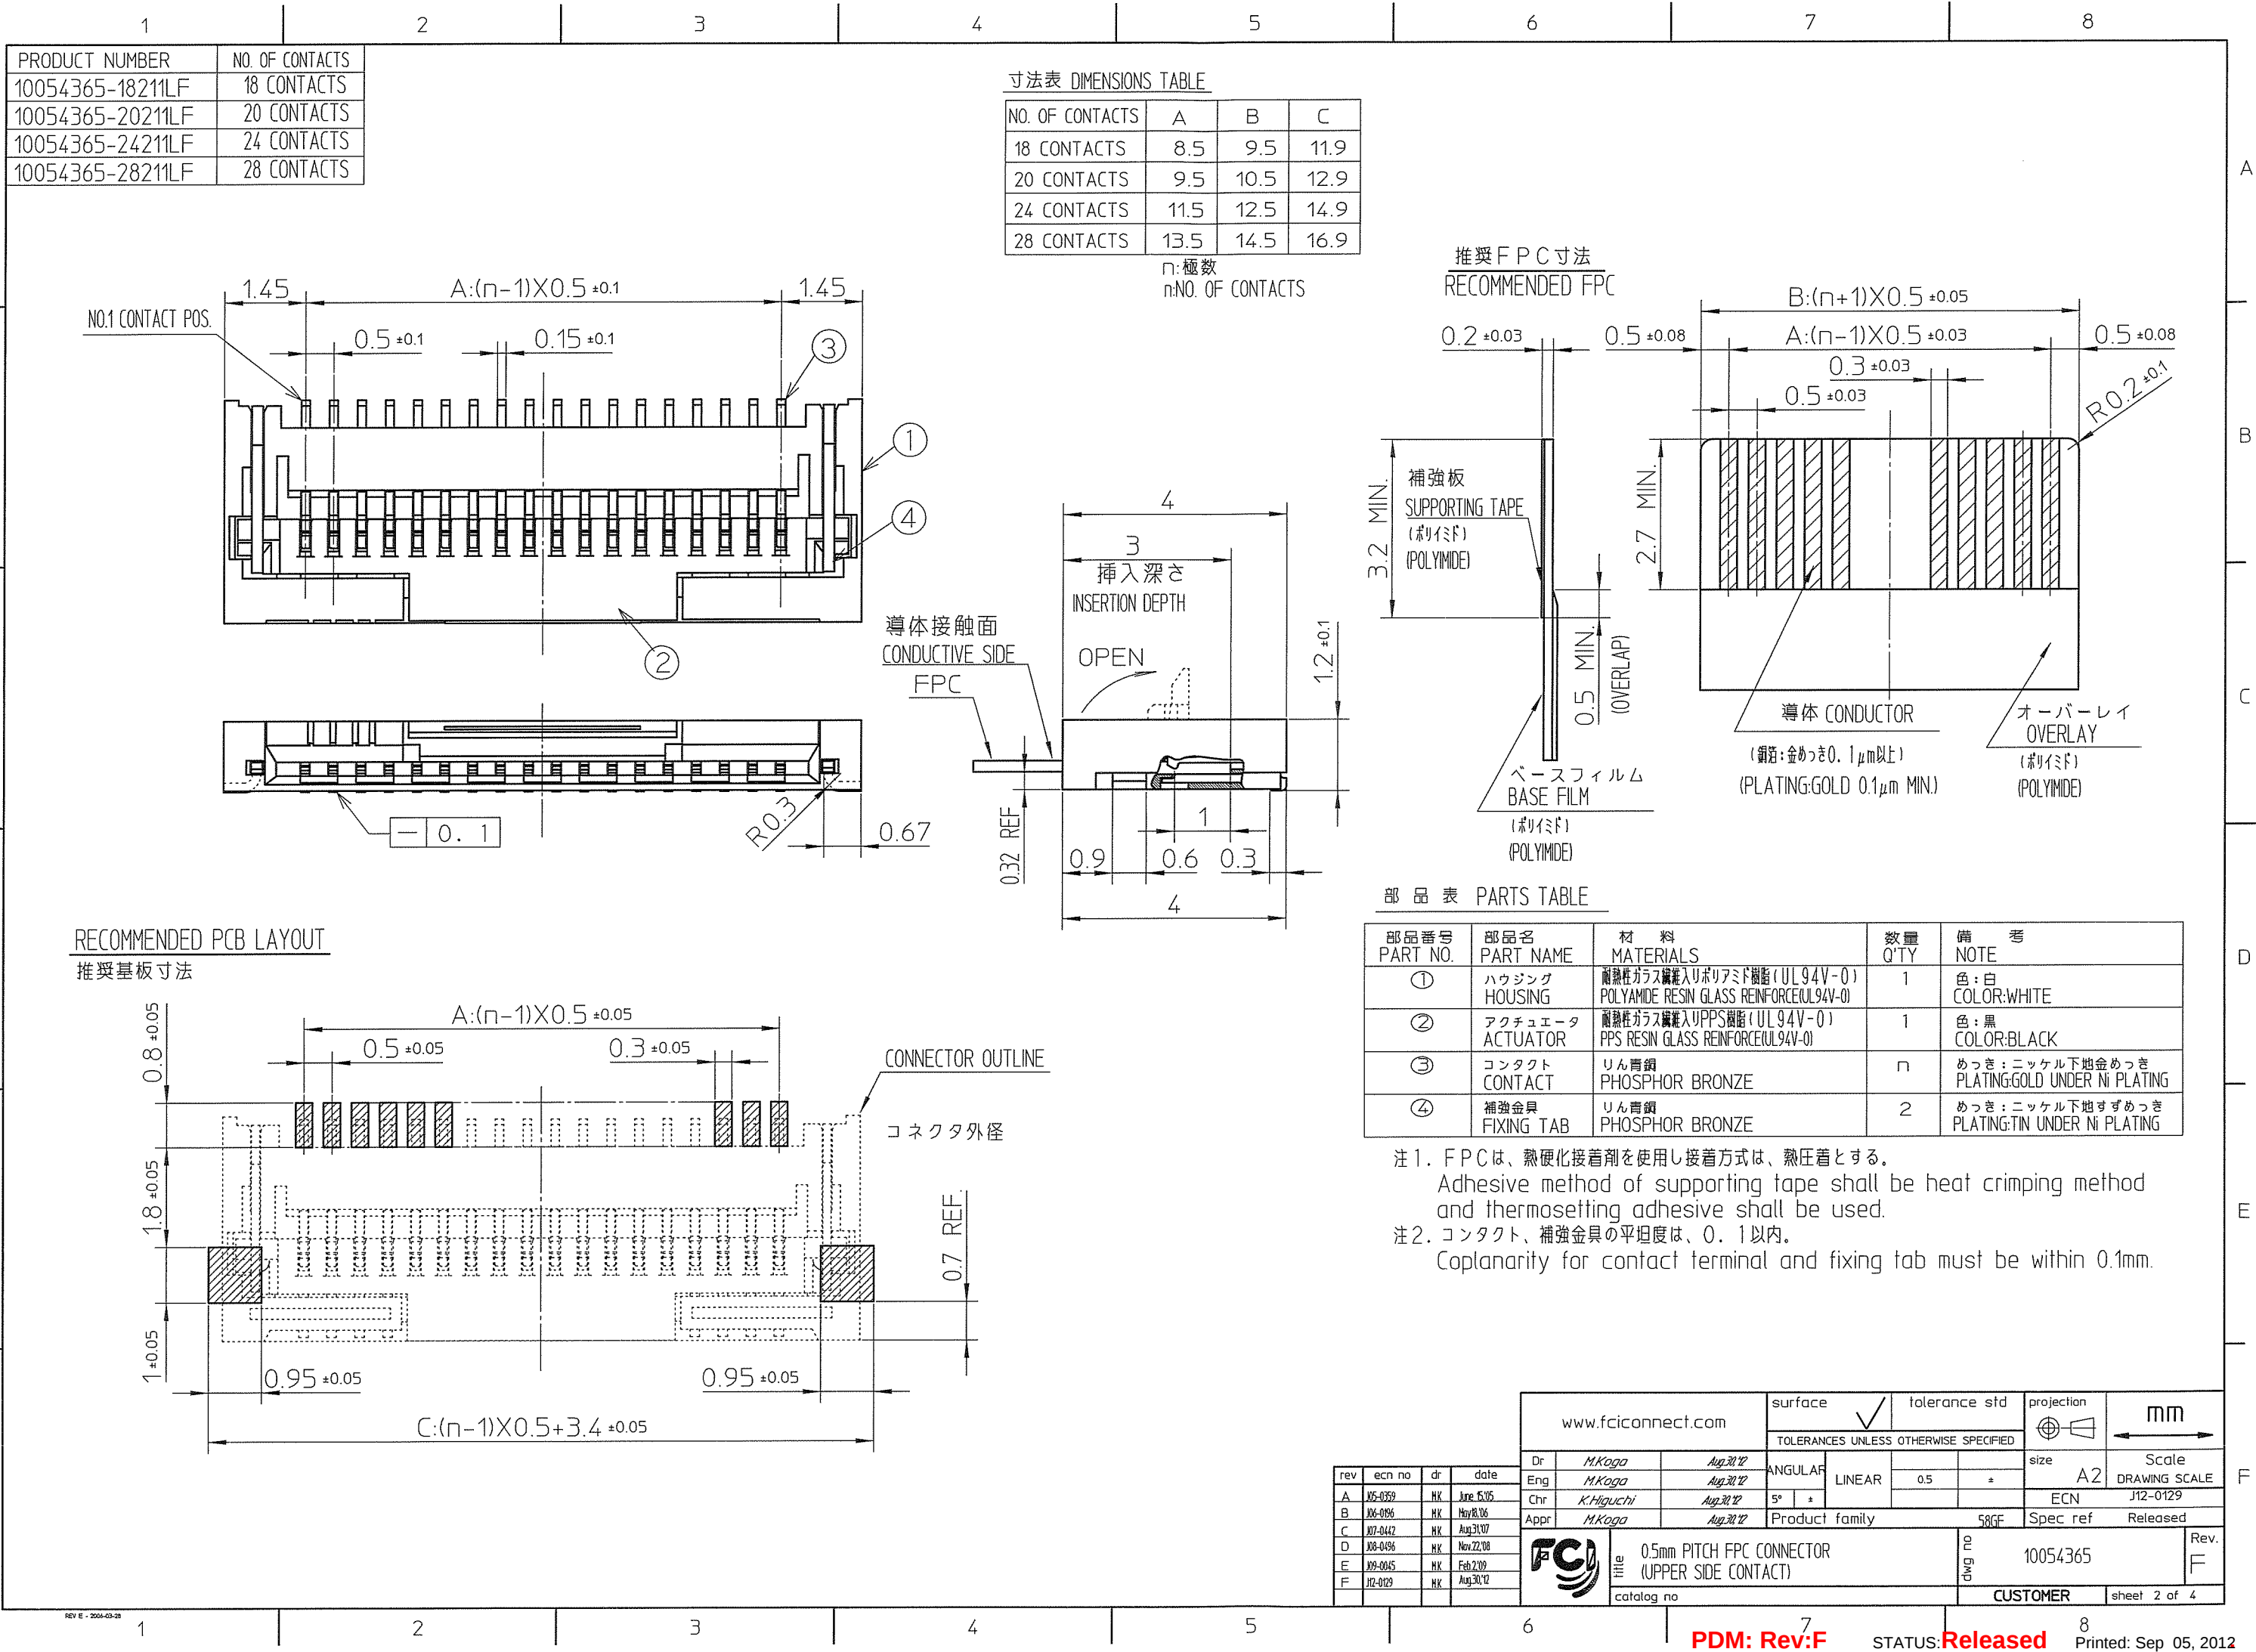

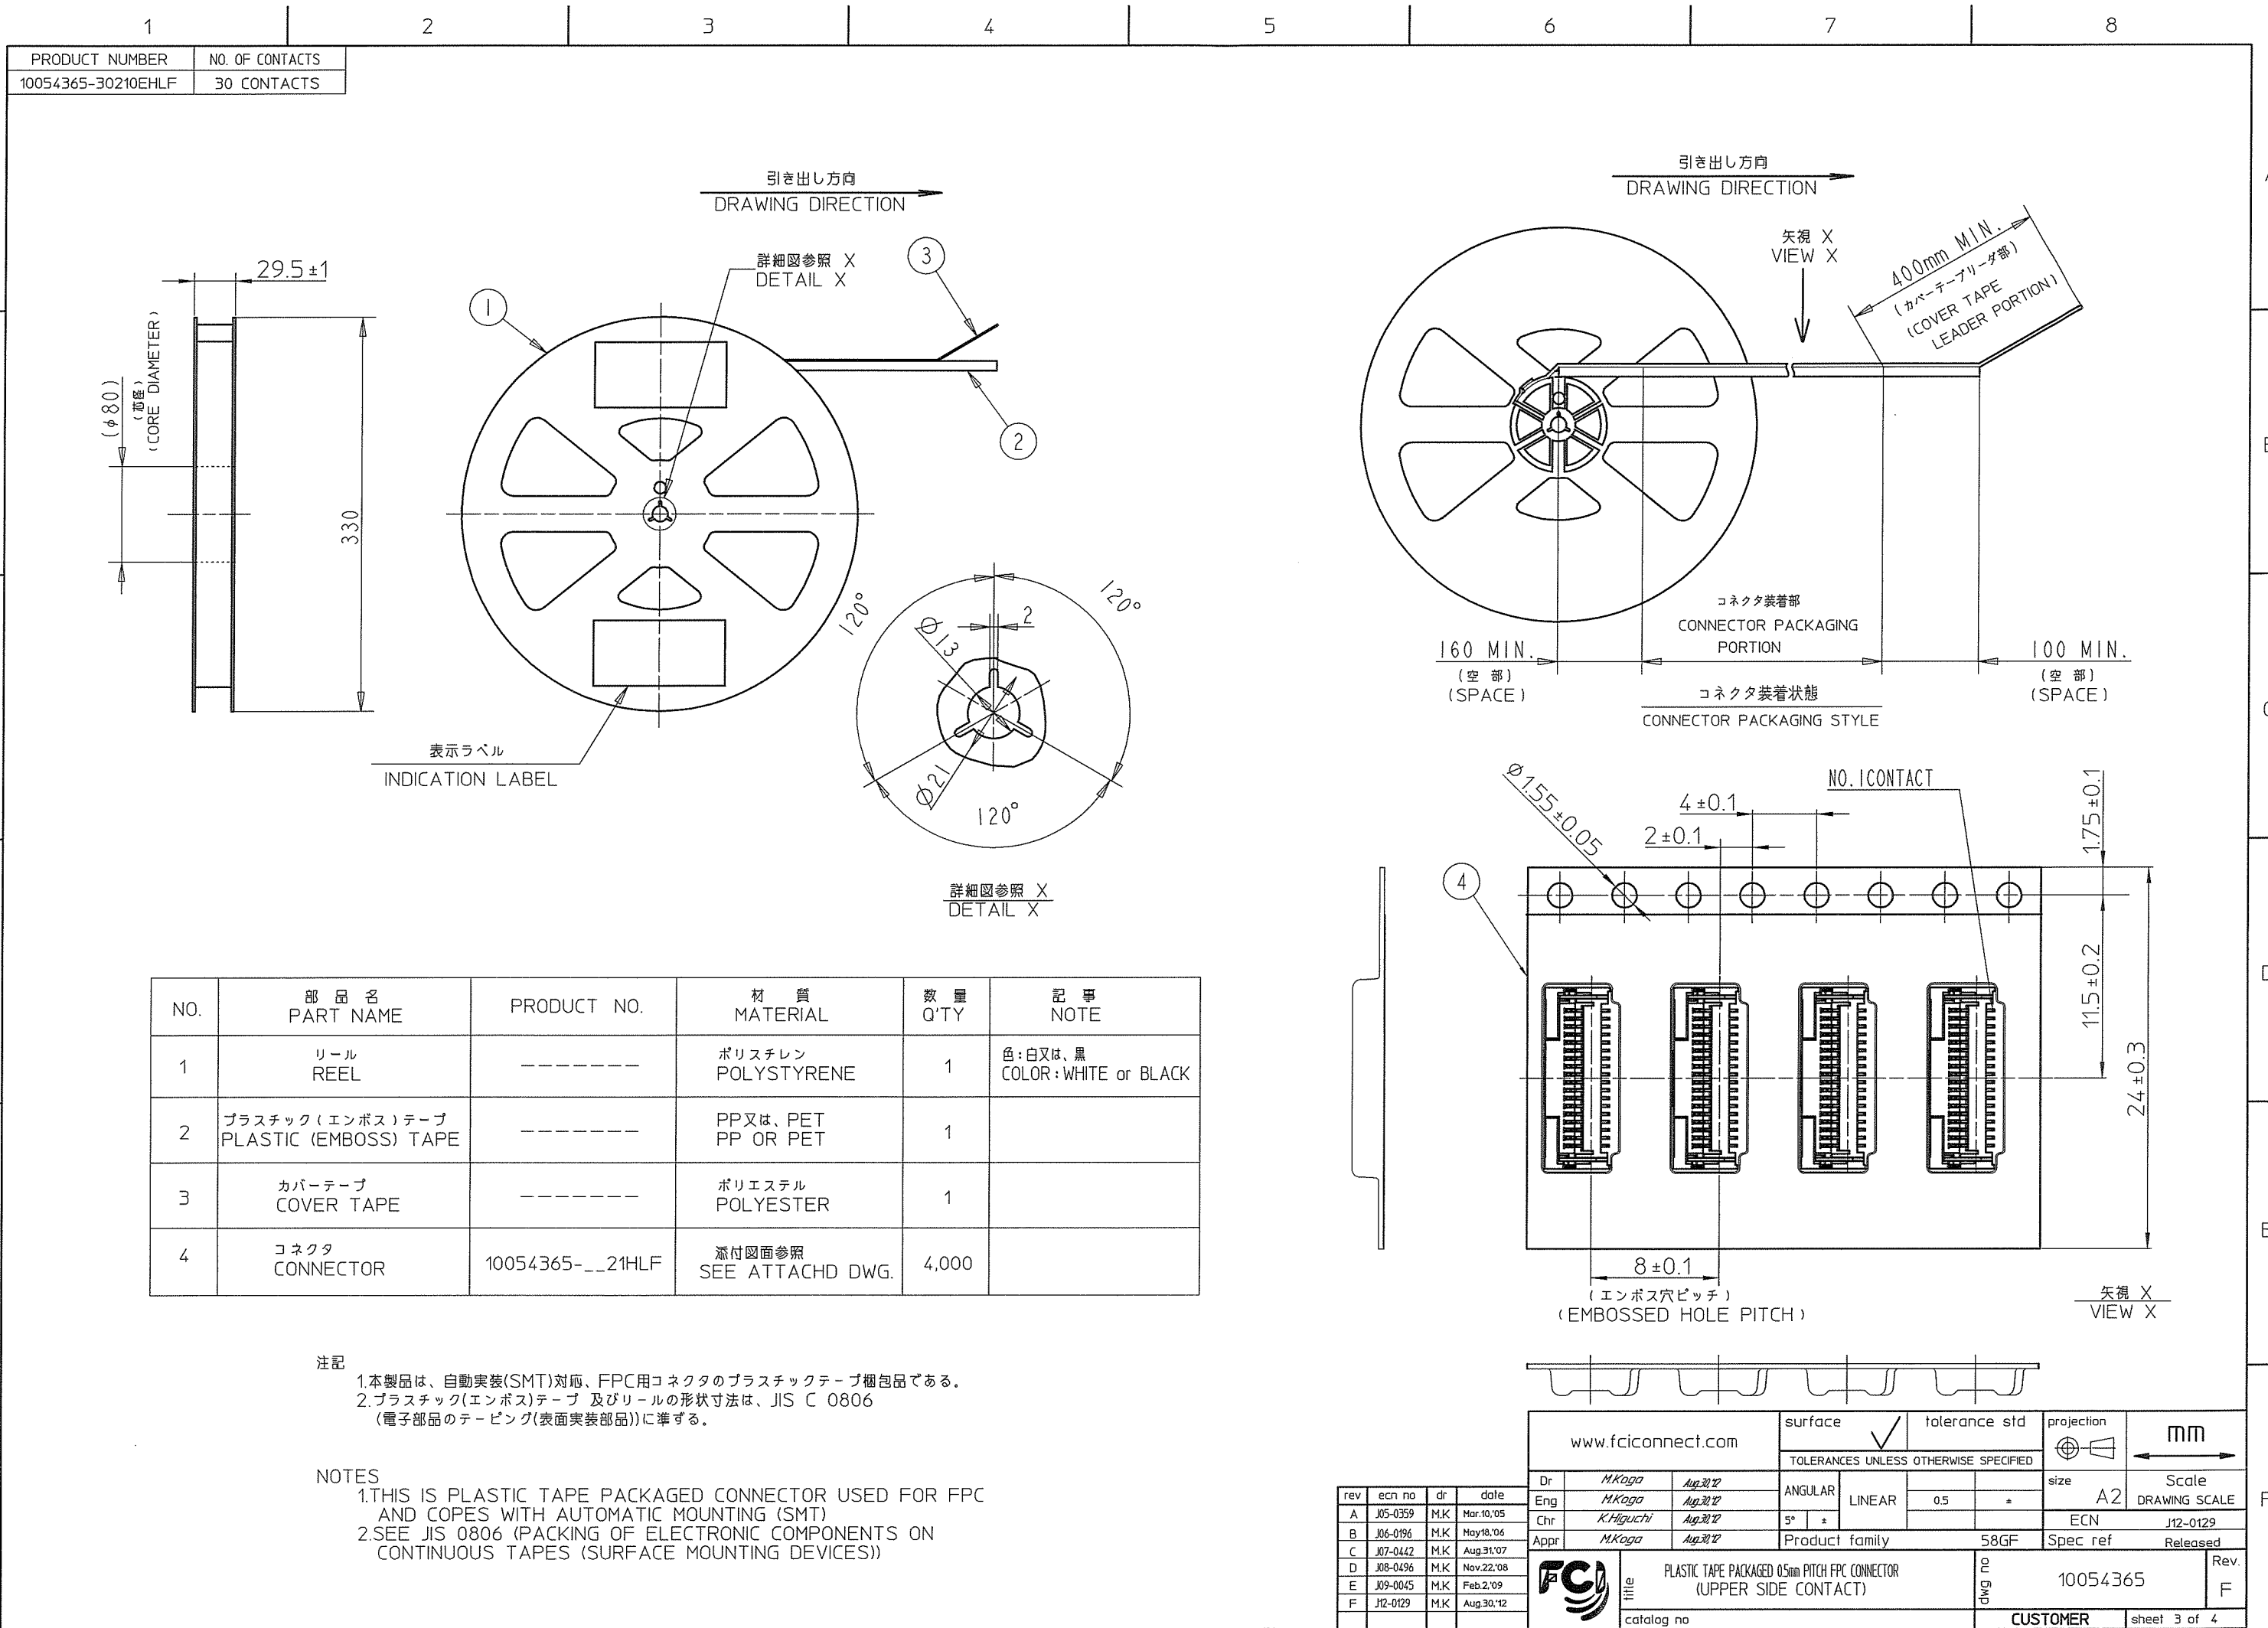


PRODUCT NUMBER	NO. OF CONTACTS
10054365-3021HLF	30 CONTACTS

寸法表 DIMENSIONS TABLE

NO. OF CONTACTS	A	B	C
30 CONTACTS	14.5	15.5	17.9

n:極数
n:NO. OF CONTACTS

推奨FPC寸法
RECOMMENDED FPC

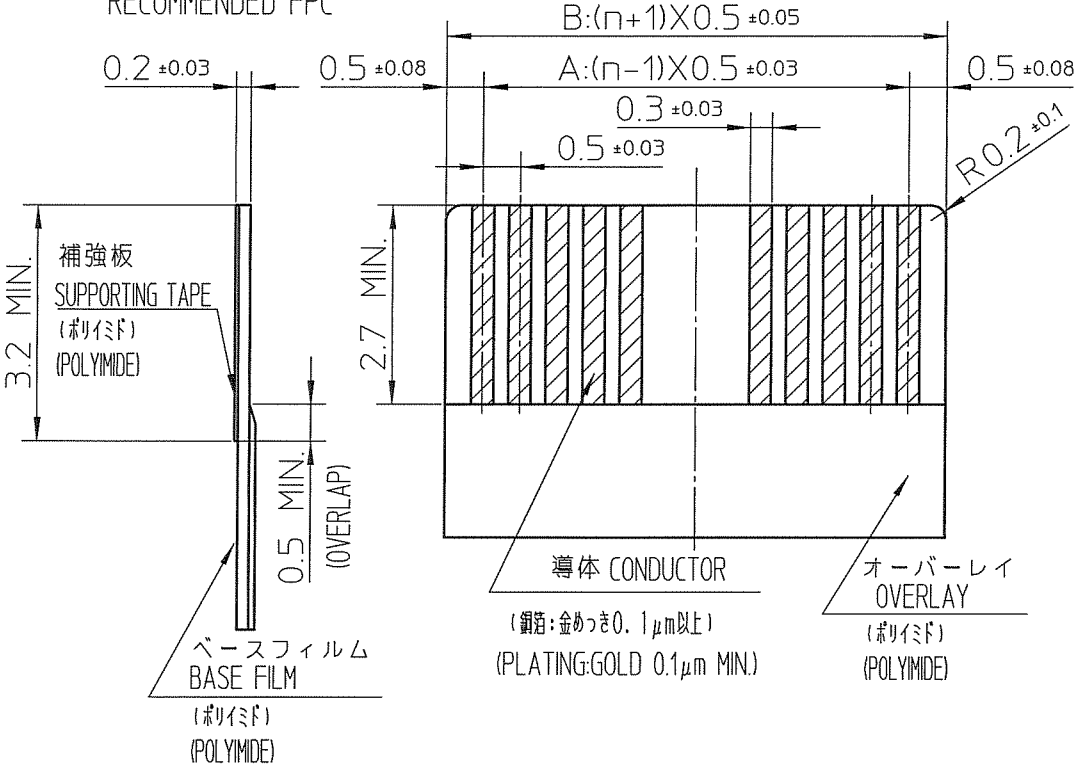


部品表 PARTS TABLE

部品番号 PART NO.	部品名 PART NAME	材 料 MATERIALS	数量 Q'TY	備 考 NOTE
①	ハウジング HOUSING	耐熱性ガラス繊維入りLCP樹脂 (UL94V-0) LCP RESIN GLASS REINFORCE(UL94V-0)	1	色:白,ハロゲンフリー COLOR:WHITE, HALOGEN FREE
②	アクチュエータ ACTUATOR	耐熱性ガラス繊維入りPPS樹脂 (UL94V-0) PPS RESIN GLASS REINFORCE(UL94V-0)	1	色:黒,ハロゲンフリー COLOR:BLACK, HALOGEN FREE
③	コンタクト CONTACT	りん青銅 PHOSPHOR BRONZE	n	めっき:ニッケル下地金めっき PLATING:GOLD UNDER Ni PLATING
④	補強金具 FIXING TAB	りん青銅 PHOSPHOR BRONZE	2	めっき:ニッケル下地すずめっき PLATING:TIN UNDER Ni PLATING

注1. FPCは、熱硬化接着剤を使用し接着方式は、熱圧着とする。
Adhesive method of supporting tape shall be heat crimping method and thermosetting adhesive shall be used.

注2. コンタクト、補強金具の平坦度は、0.1以内。
Coplanarity for contact terminal and fixing tab must be within 0.1mm.

RECOMMENDED PCB LAYOUT
推奨基板寸法

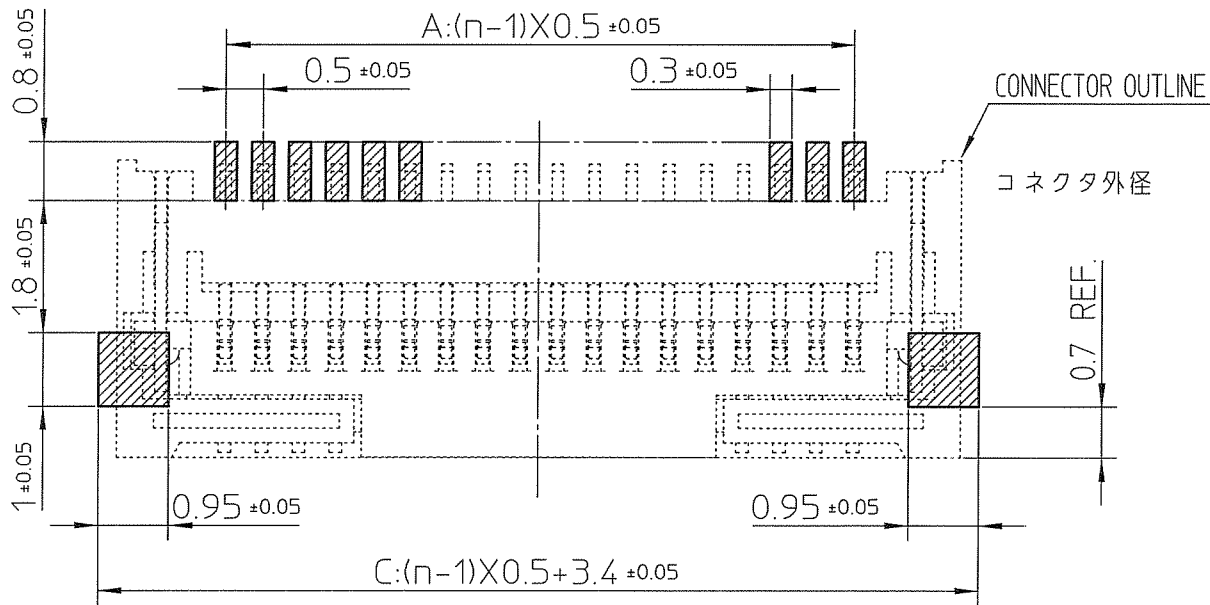

rev	ecn no.	dr	date
A	X05-0359	HK	June 15,05
B	X06-0196	HK	May 28,06
C	X07-0442	HK	Aug 31,07
D	X08-0496	HK	Nov 22,08
E	X09-0015	HK	Feb 2,09
F	J12-0129	HK	Aug 30,12

www.fcconnect.com		surface	tolerance std	projection	mm	
		✓				
		TOLERANCES UNLESS OTHERWISE SPECIFIED		size	Scale	
Dr	M.Kaga	Aug 30 12	ANGULAR	LINEAR	0.5	A2
Eng	M.Kaga	Aug 30 12	5°	*	*	J12-0129
Chr	K.Higuchi	Aug 30 12	Product family		58GF	Spec ref
Appr	M.Kaga	Aug 30 12			Released	
title		0.5mm PITCH FPC CONNECTOR (UPPER SIDE CONTACT)		10054365		Rev.
catalog no				CUSTOMER		sheet 4 of 4