



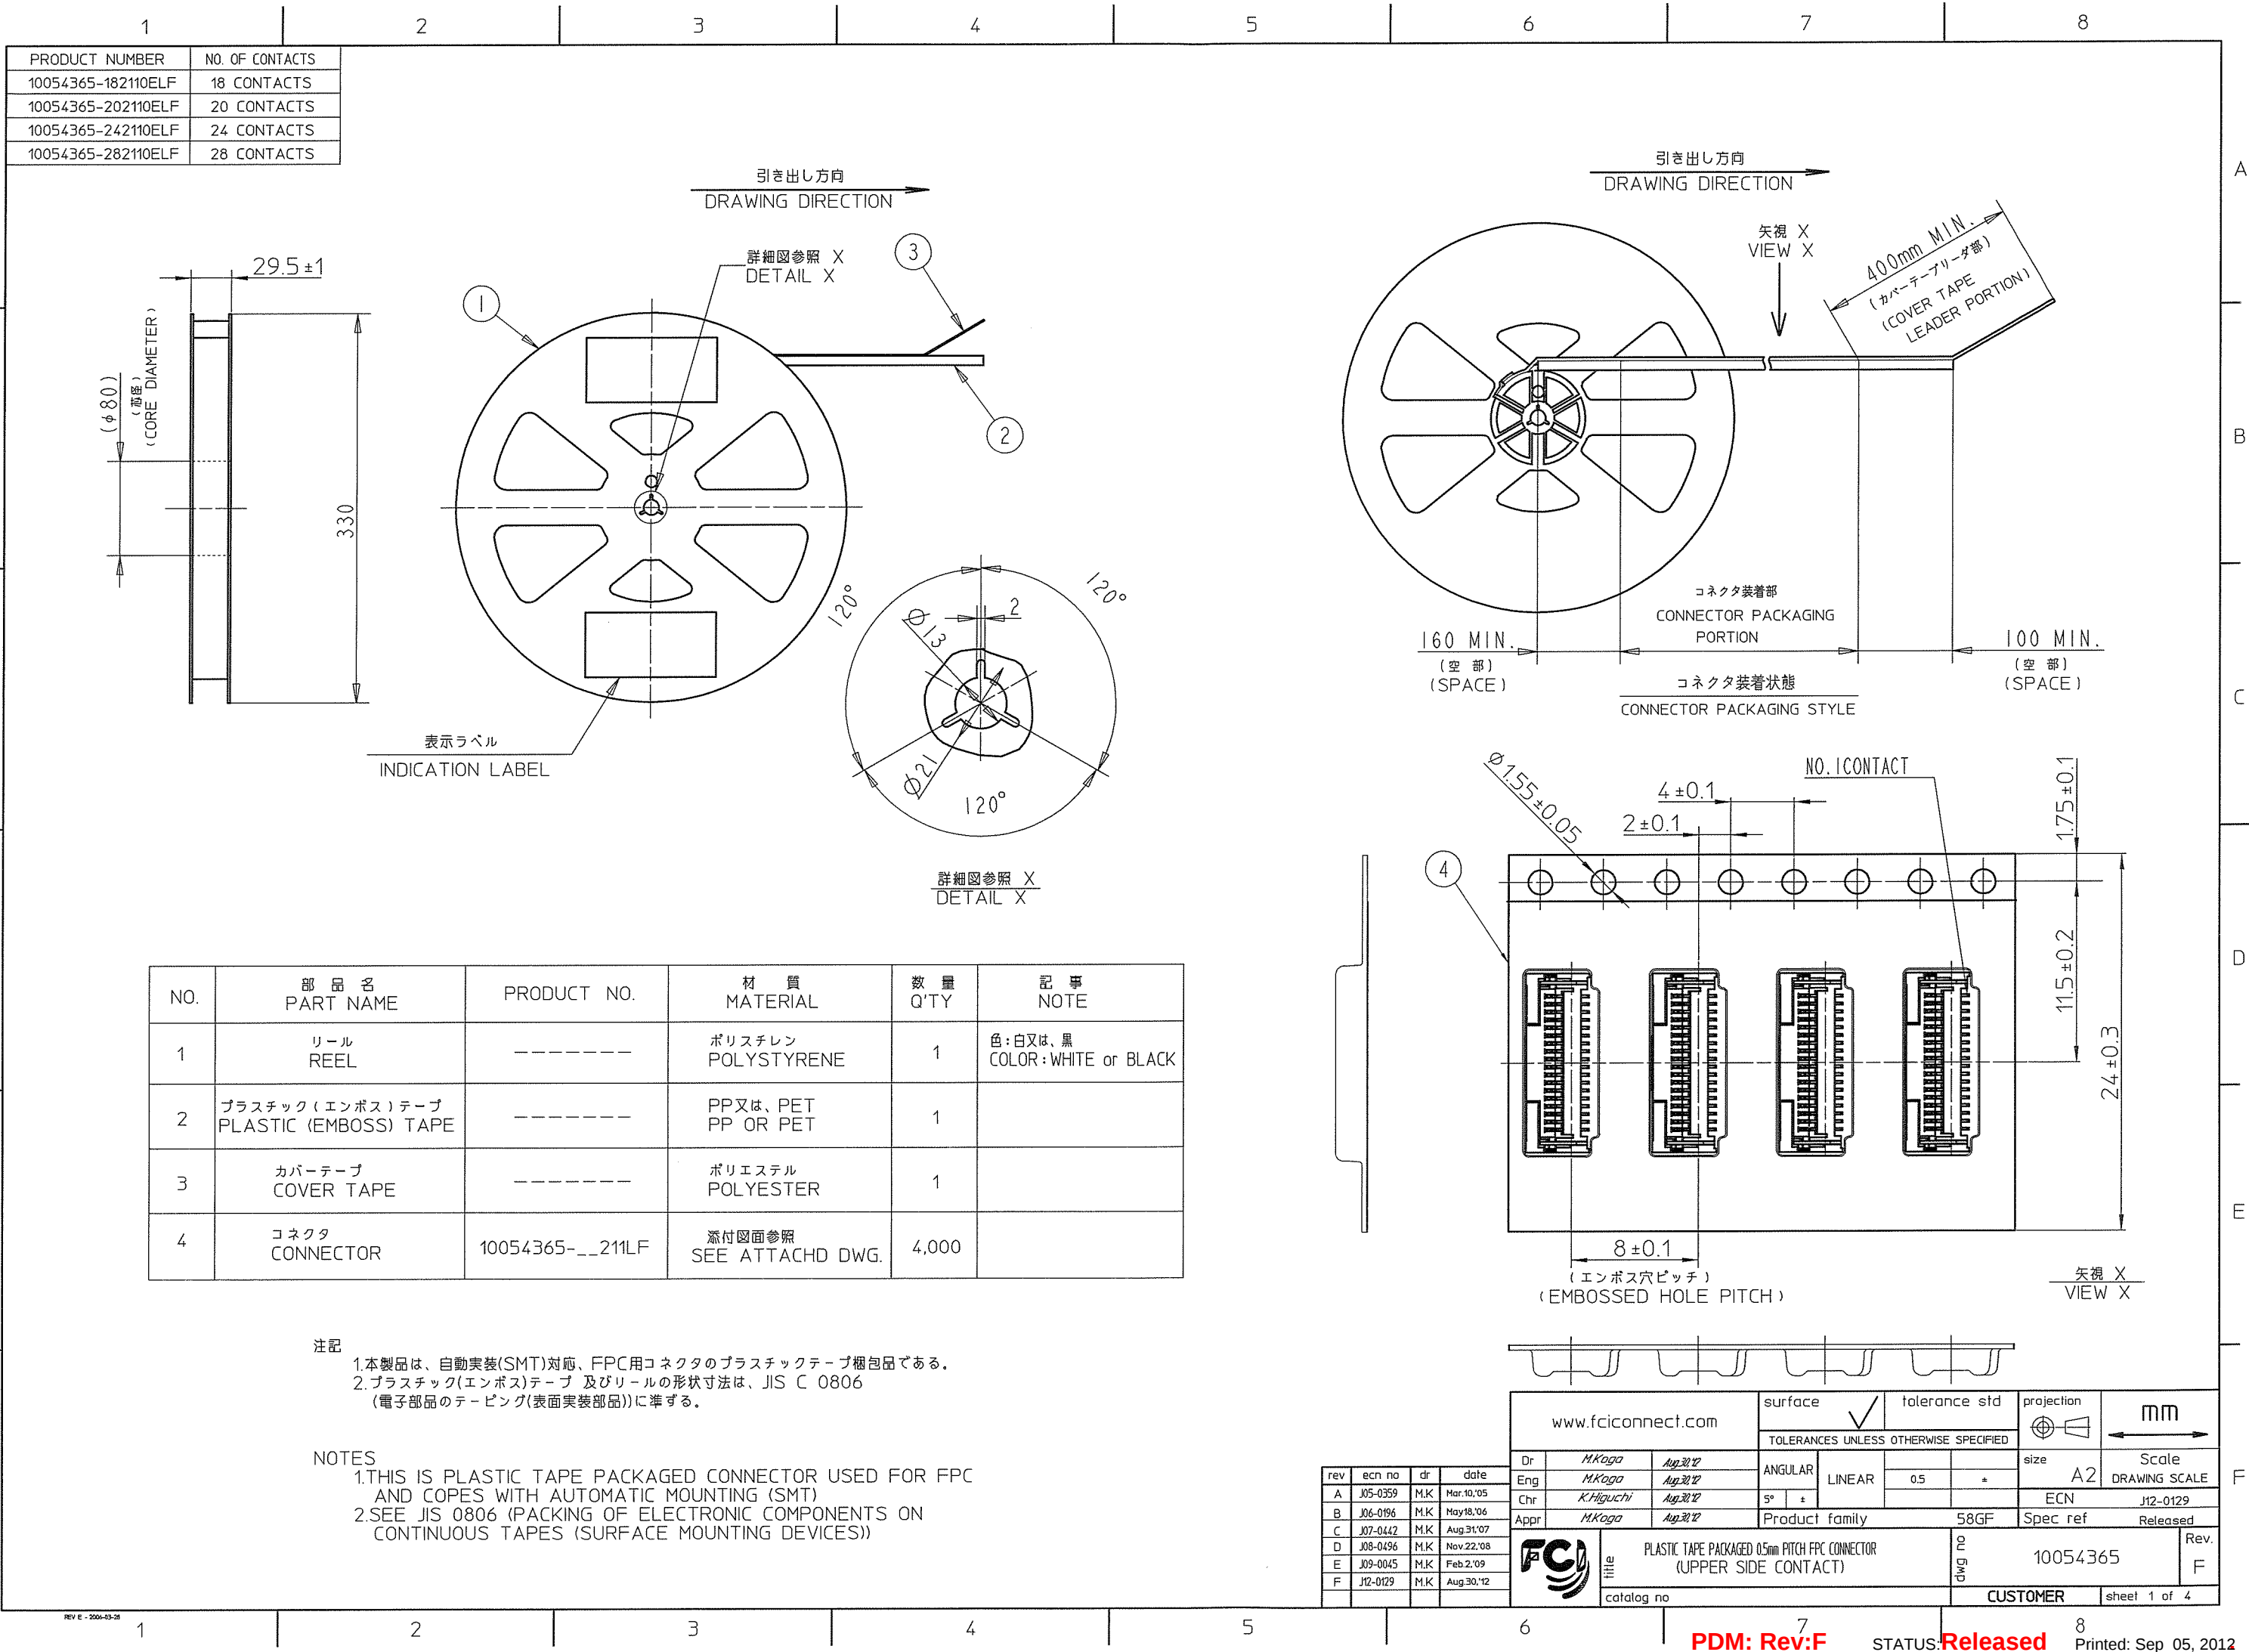

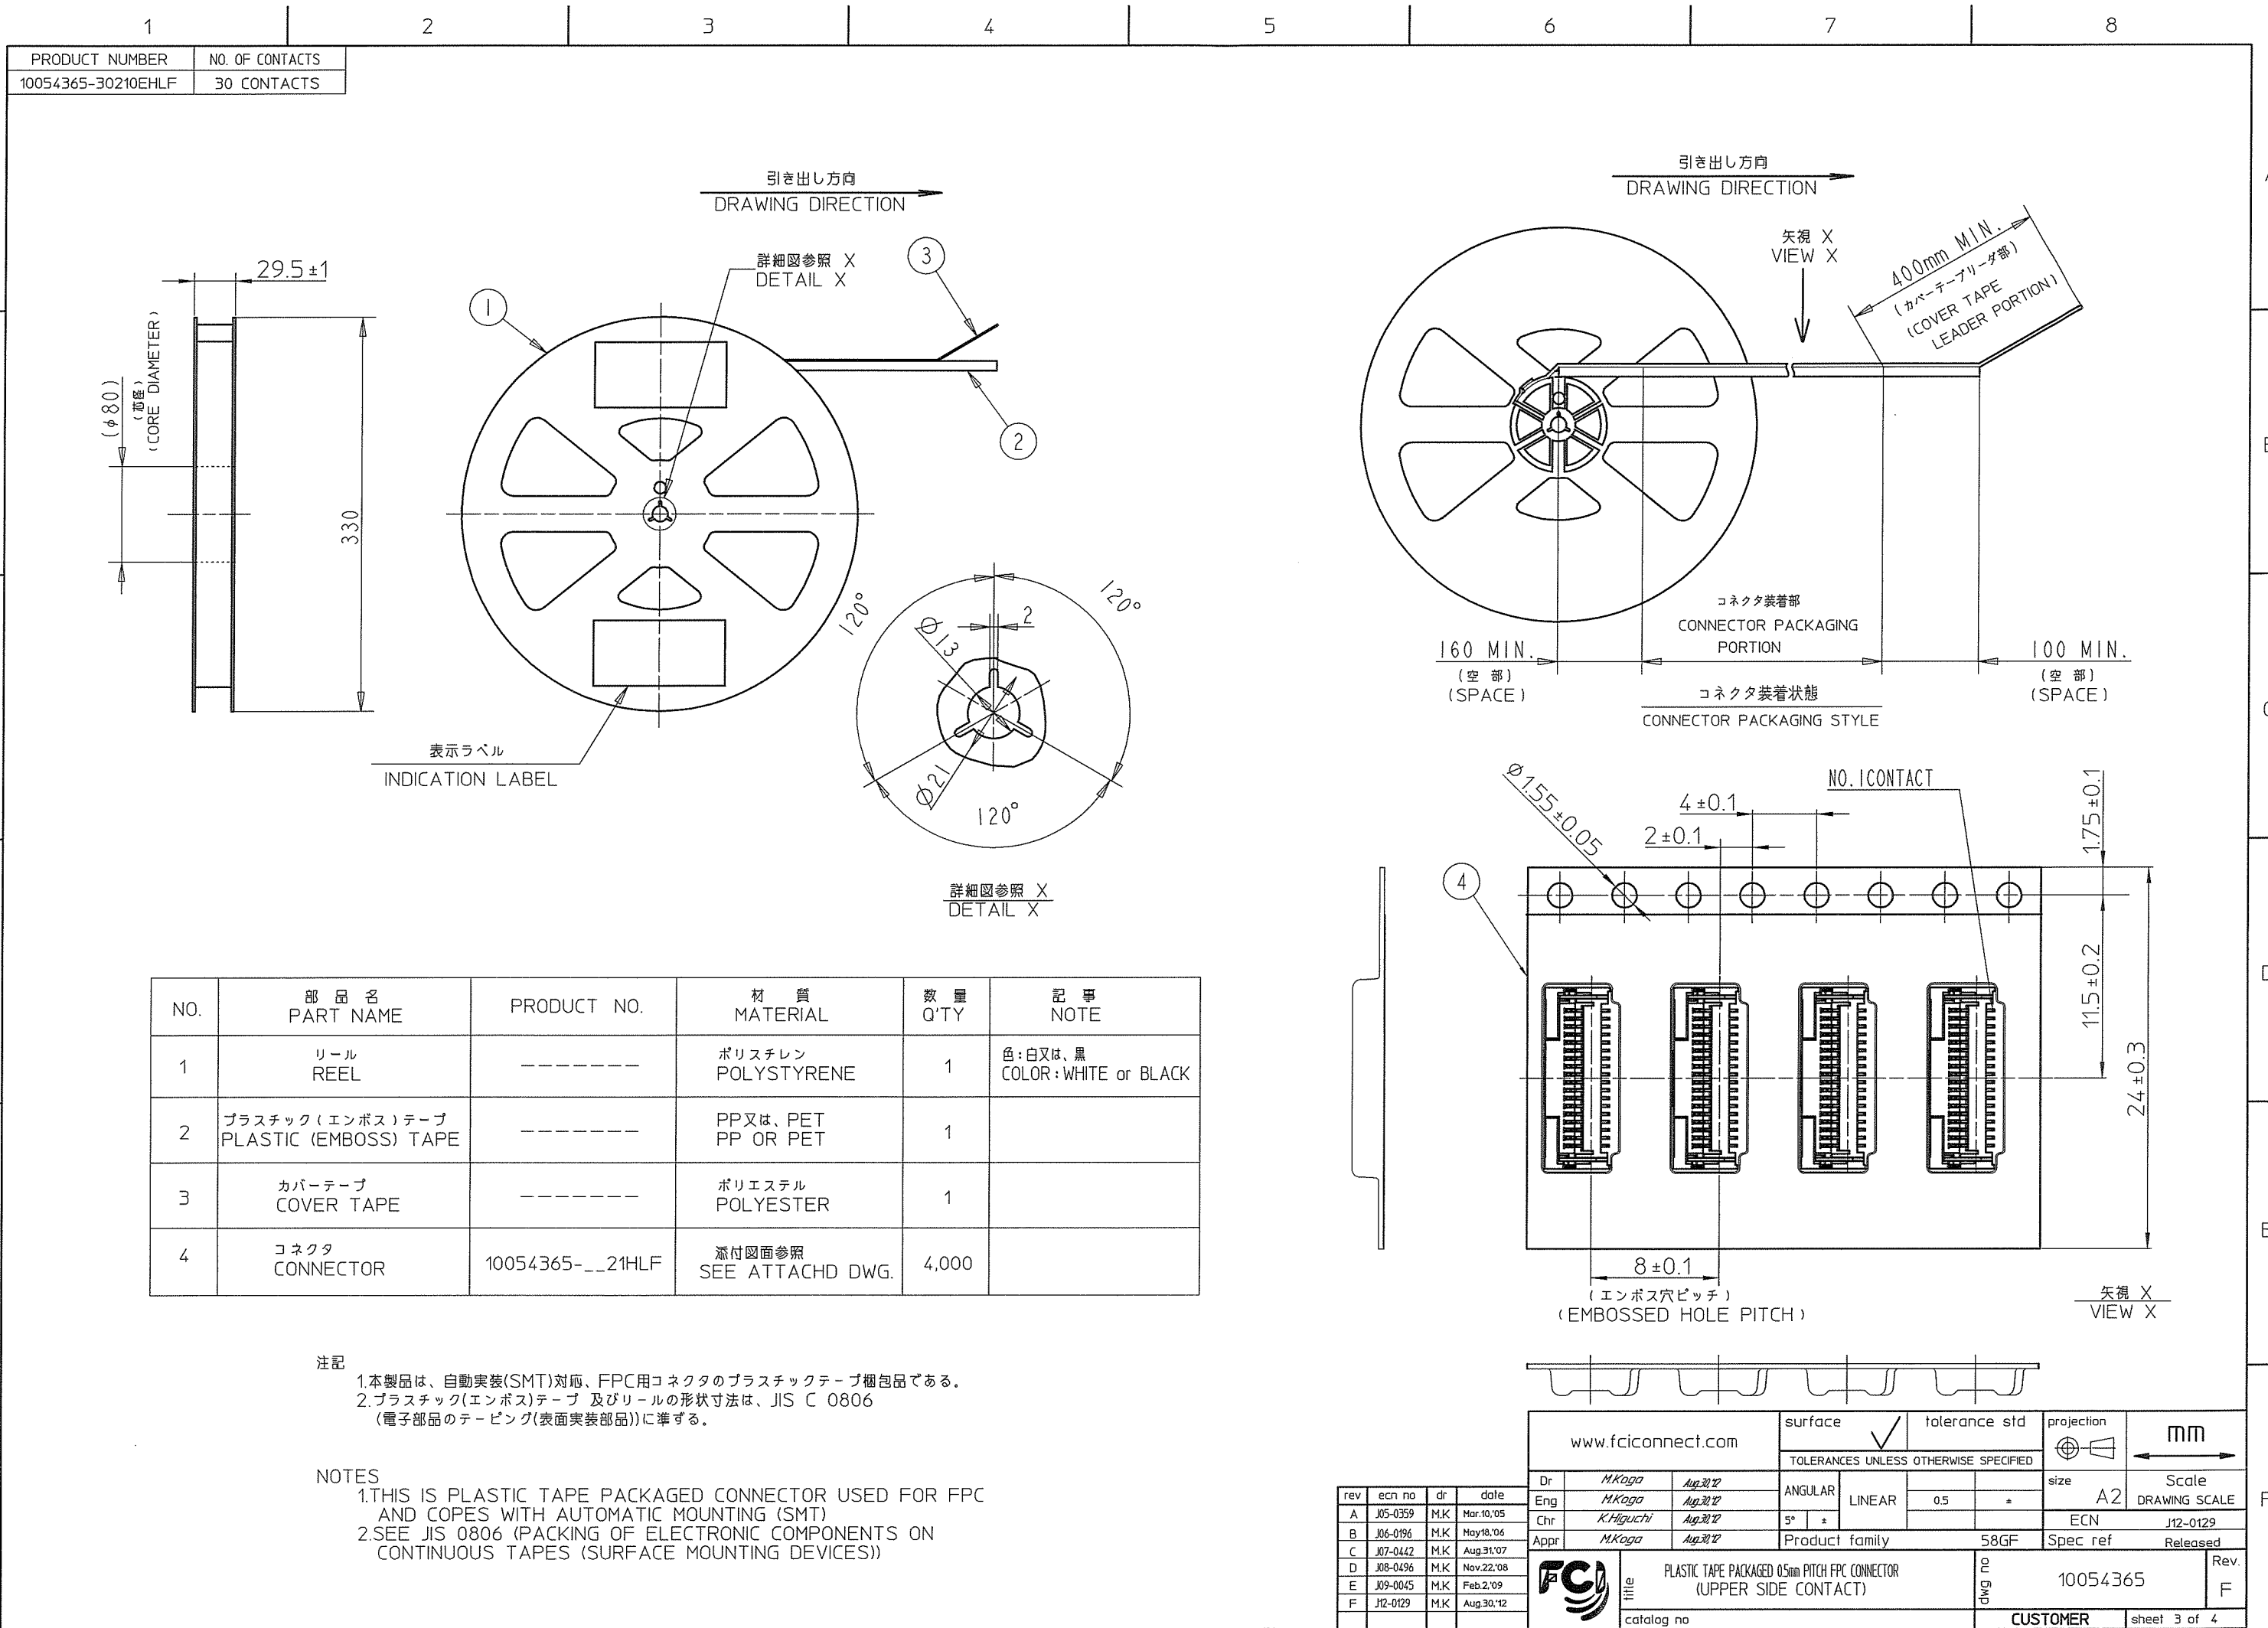


PRODUCT NUMBER	NO. OF CONTACTS
10054365-3021HLF	30 CONTACTS


寸法表 DIMENSIONS TABLE

NO. OF CONTACTS	A	B	C
30 CONTACTS	14.5	15.5	17.9


n:極数
n:NO. OF CONTACTS

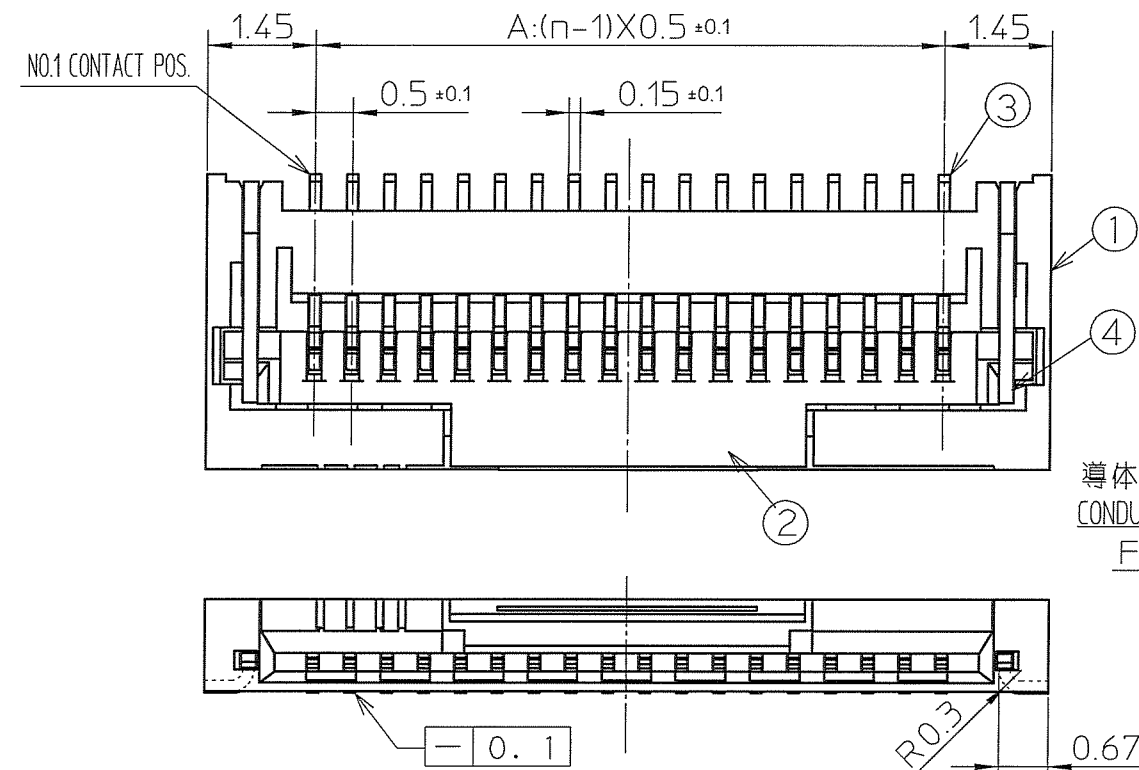

RECOMMENDED PCB LAYOUT
推奨基板寸法

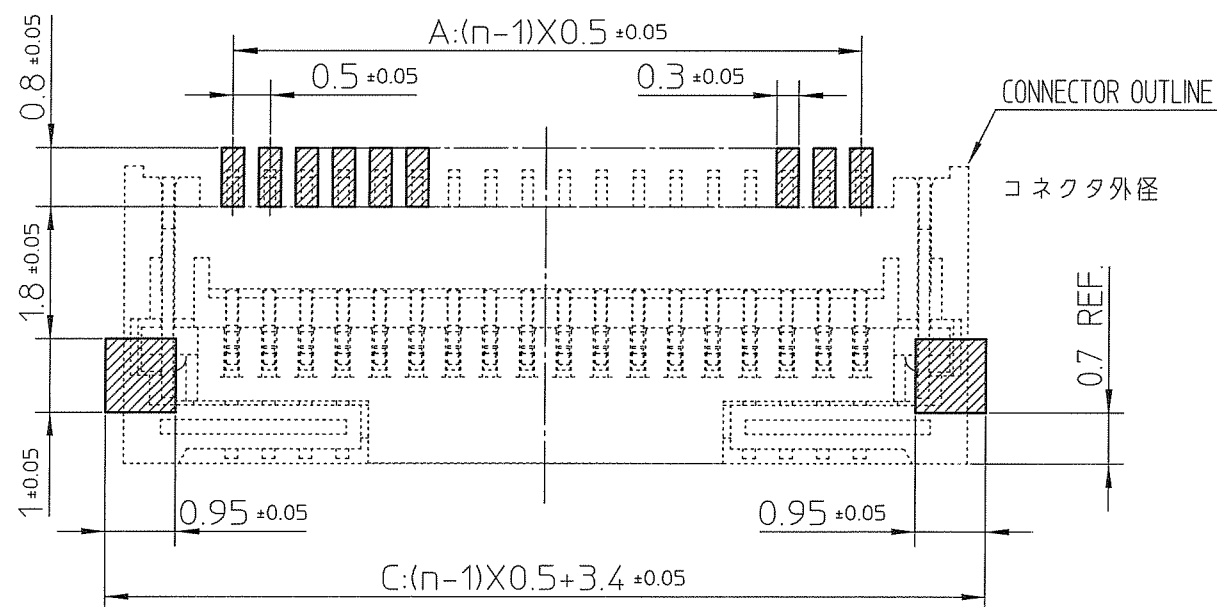

推奨FPC寸法
RECOMMENDED FPC

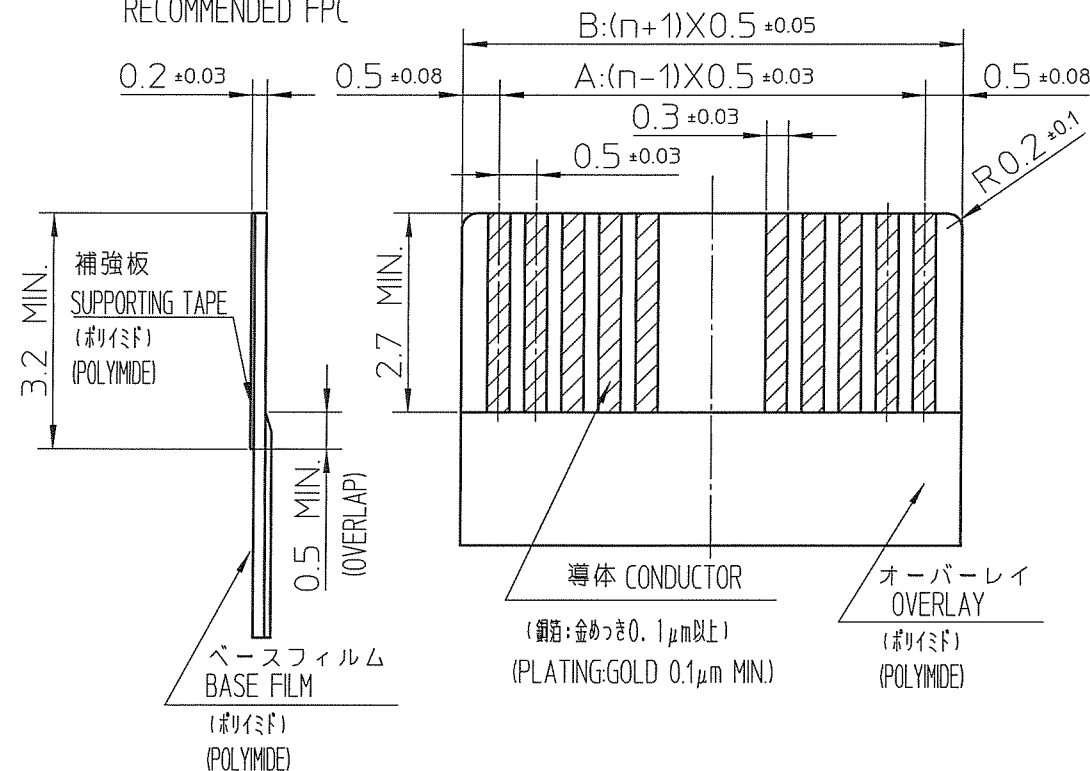

部品表 PARTS TABLE

部品番号 PART NO.	部品名 PART NAME	材 料 MATERIALS	数量 Q'TY	備 考 NOTE
①	ハウジング HOUSING	耐熱性ガラス繊維入りLCP樹脂 (UL94V-0) LCP RESIN GLASS REINFORCE(UL94V-0)	1	色:白,ハロゲンフリー COLOR:WHITE, HALOGEN FREE
②	アクチュエータ ACTUATOR	耐熱性ガラス繊維入りPPS樹脂 (UL94V-0) PPS RESIN GLASS REINFORCE(UL94V-0)	1	色:黒,ハロゲンフリー COLOR:BLACK, HALOGEN FREE
③	コンタクト CONTACT	りん青銅 PHOSPHOR BRONZE	n	めっき:ニッケル下地金めっき PLATING:GOLD UNDER Ni PLATING
④	補強金具 FIXING TAB	りん青銅 PHOSPHOR BRONZE	2	めっき:ニッケル下地金めっき PLATING:TIN UNDER Ni PLATING

- 注1. FPCは、熱硬化接着剤を使用し接着方式は、熱圧着とする。
Adhesive method of supporting tape shall be heat crimping method and thermosetting adhesive shall be used.
- 注2. コンタクト、補強金具の平坦度は、0.1以内。
Coplanarity for contact terminal and fixing tab must be within 0.1mm.

rev	ecn no.	dr	date
A	X05-0359	HK	June 15, 05
B	X06-0196	HK	May 28, 06
C	X07-0442	HK	Aug 31, 07
D	X08-0496	HK	Nov 22, 08
E	X09-0045	HK	Feb 2, 09
F	J12-0129	HK	Aug 30, 12

www.fcconnect.com		surface ☒	tolerance std	projection	mm	
		TOLERANCES UNLESS OTHERWISE SPECIFIED				
Dr	M.Kaga	Aug 30 12	ANGULAR	LINEAR	0.5	*
Eng	M.Kaga	Aug 30 12	5°	*	size A2	
Chr	K.Higuchi	Aug 30 12	Product family		58GF	Spec ref Released
Appr	M.Kaga	Aug 30 12	title		0.5mm PITCH FPC CONNECTOR (UPPER SIDE CONTACT)	Rev. F
		catalog no	10054365		CUSTOMER sheet 4 of 4	