
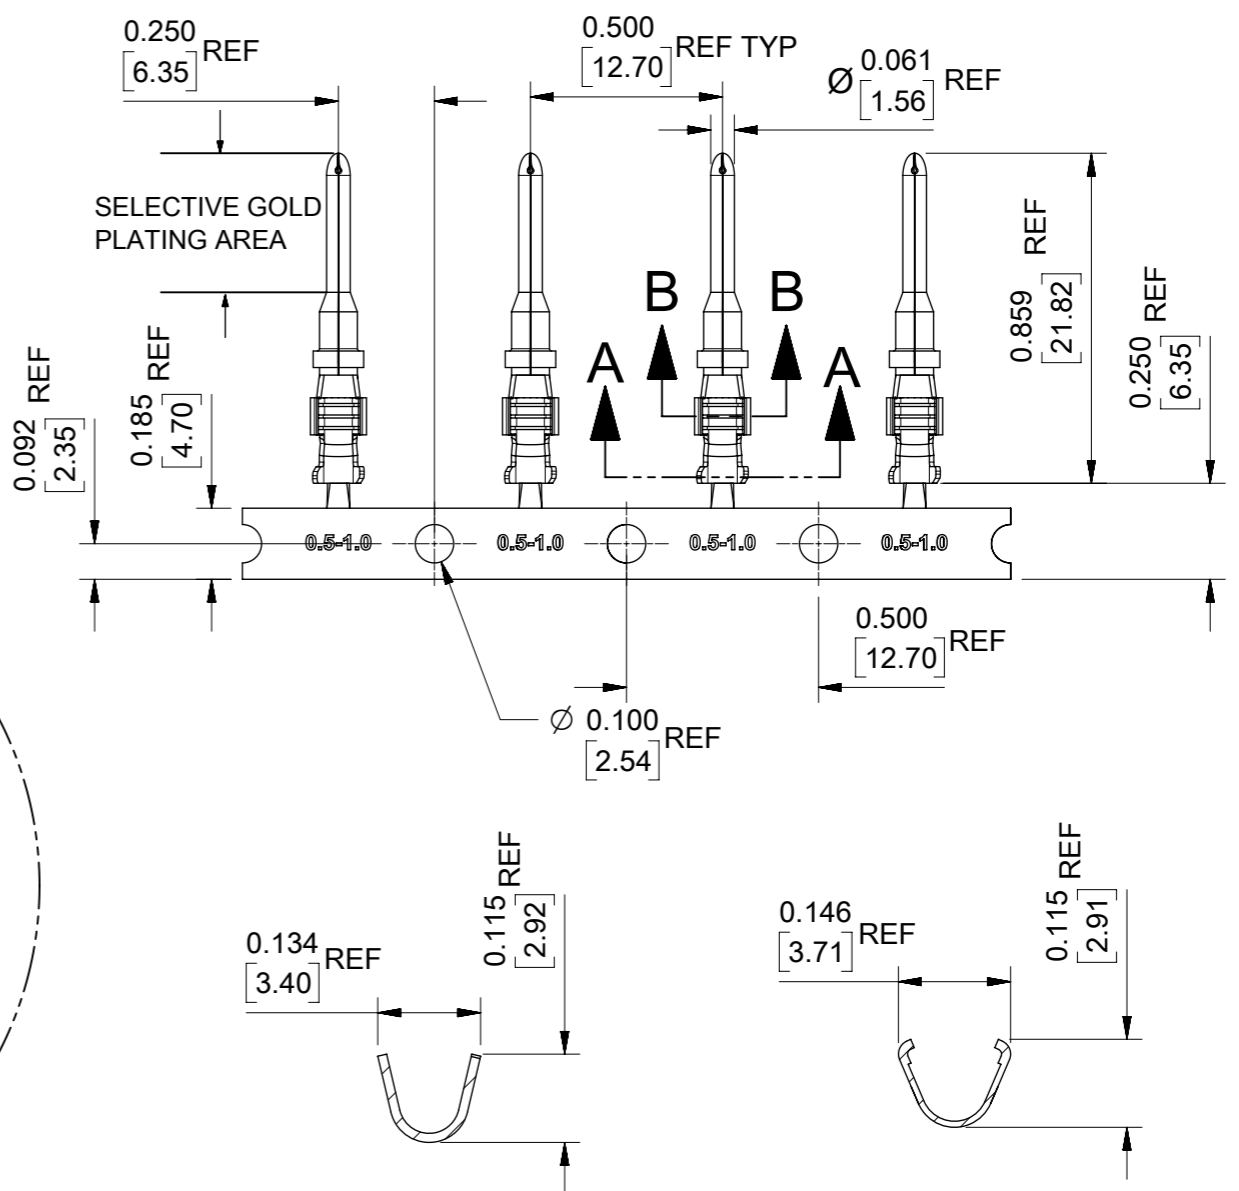


STRIP MATERIAL NUMBER	FINISH
84524-0030	OVERALL NICKEL 80μ" MINIMUM
84524-0028	SELECTIVE HARD GOLD 30μ" MINIMUM OVER NICKEL 50μ" MINIMUM ALL OVER

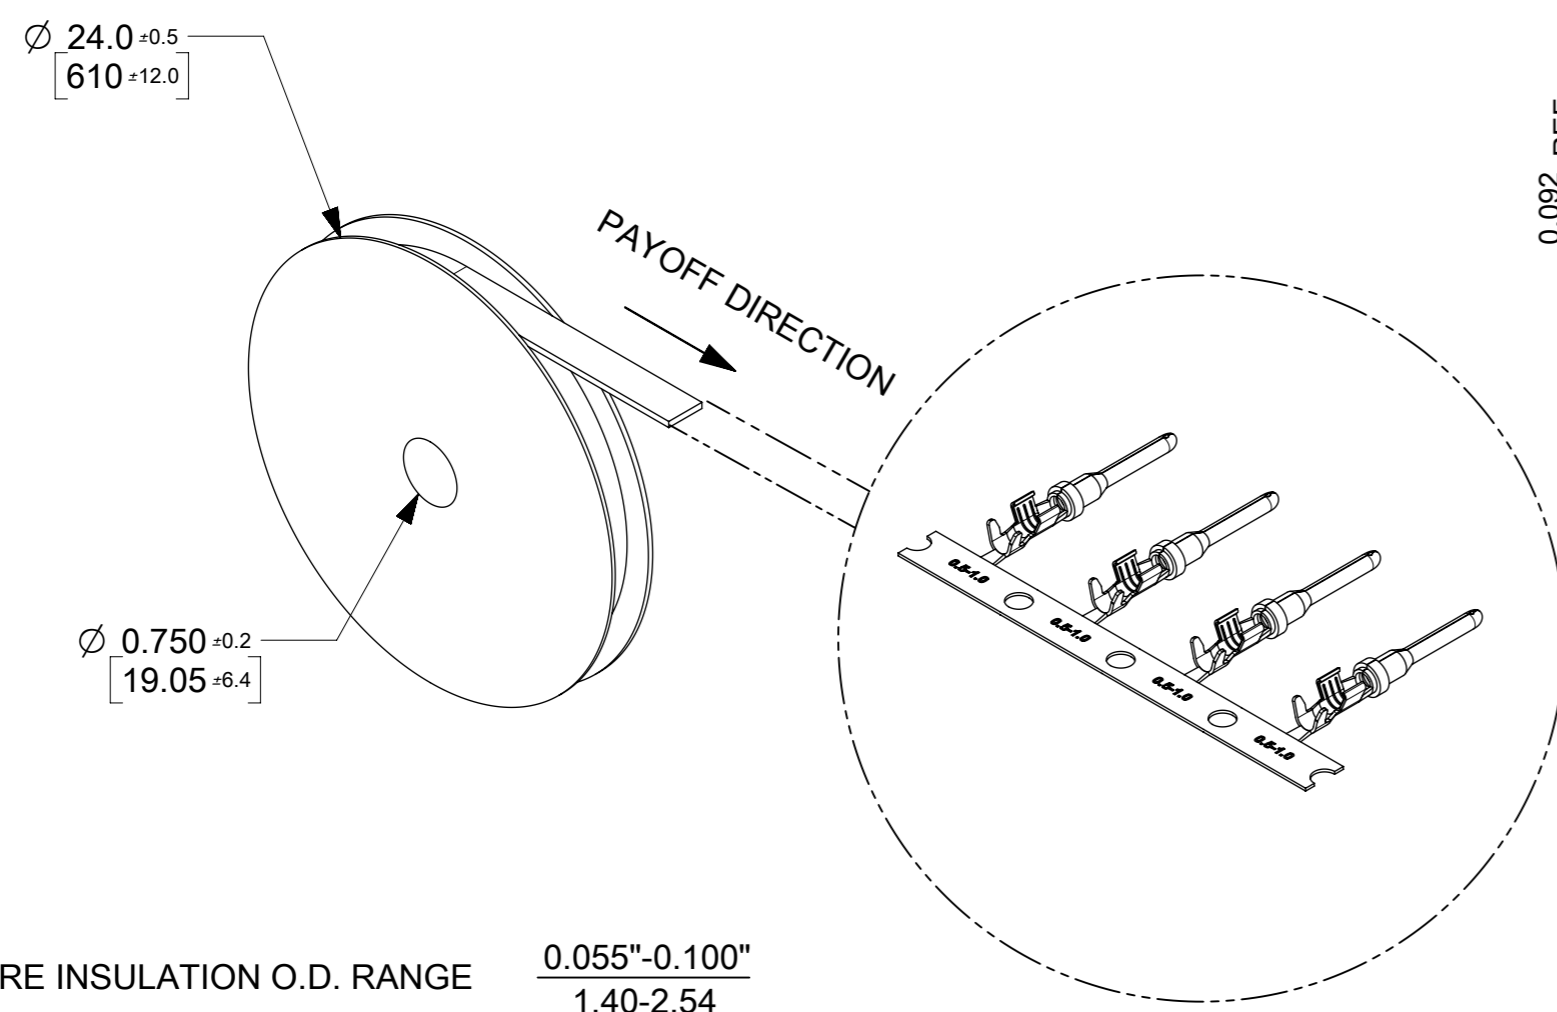

SECTION A-A
INSULATION CRIMP

SECTION B-B
CONDUCTOR CRIMP

WIRE INSULATION O.D. RANGE $\frac{0.055"-0.100"}{1.40-2.54}$

- NOTES:
1. MATERIAL: COPPER ALLOY .0118/0.300 THICK.
 2. FINISH: SEE CHART.
 3. STRIP PARTS ARE REELED 3000 PARTS PER REEL AS SHOWN ABOVE.
 4. TERMINAL FOR USE ON XRC & ML-XT CONNECTOR ASSEMBLIES.
 5. TERMINALS COMPLY WITH SECTION 5.3.2 OF THE SAE J1939-11 STANDARD FOR SURFACE VEHICLE RECOMMENDED PRACTICE.

SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC: UPDATED PIN TIP			molex		
	DIMENSION UNITS	SCALE						
▽ = 0	INCH/[mm]	2:1	EC NO: 168799			XRC PIN TERMINAL		
▽ = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DRWN: JFLETCHER 2017/11/21			16-20AWG (0.5-1.0MM ²) 0.055"-0.100" WIRE Ø		
▽ = 0	ANGULAR TOL ± 2.0°		CHK'D: JDWALLACE 2018/02/12			PRODUCT CUSTOMER DRAWING		
▽ = 0	4 PLACES ±		APPR: JDWALLACE 2018/02/20			DOCUMENT NUMBER		
▽ = 0	3 PLACES ±		INITIAL REVISION:			845240050		
▽ = 0	2 PLACES ± 0.13		DRWN: JFLETCHER 2016/01/20			DOC TYPE DOC PART REVISION		
▽ = 0	1 PLACE ± 0.2		APPR: JALEXANDER 2016/01/29			PSD 000 B		
▽ = 0	0 PLACES ±		THIRD ANGLE PROJECTION			MATERIAL NUMBER		
□ = 0	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		DRAWING			CUSTOMER		
▽ = 0			A3-SIZE			SHEET NUMBER		
			SERIES			1 OF 1		
			84524			SEE CHART		
			GENERAL MARKET					