
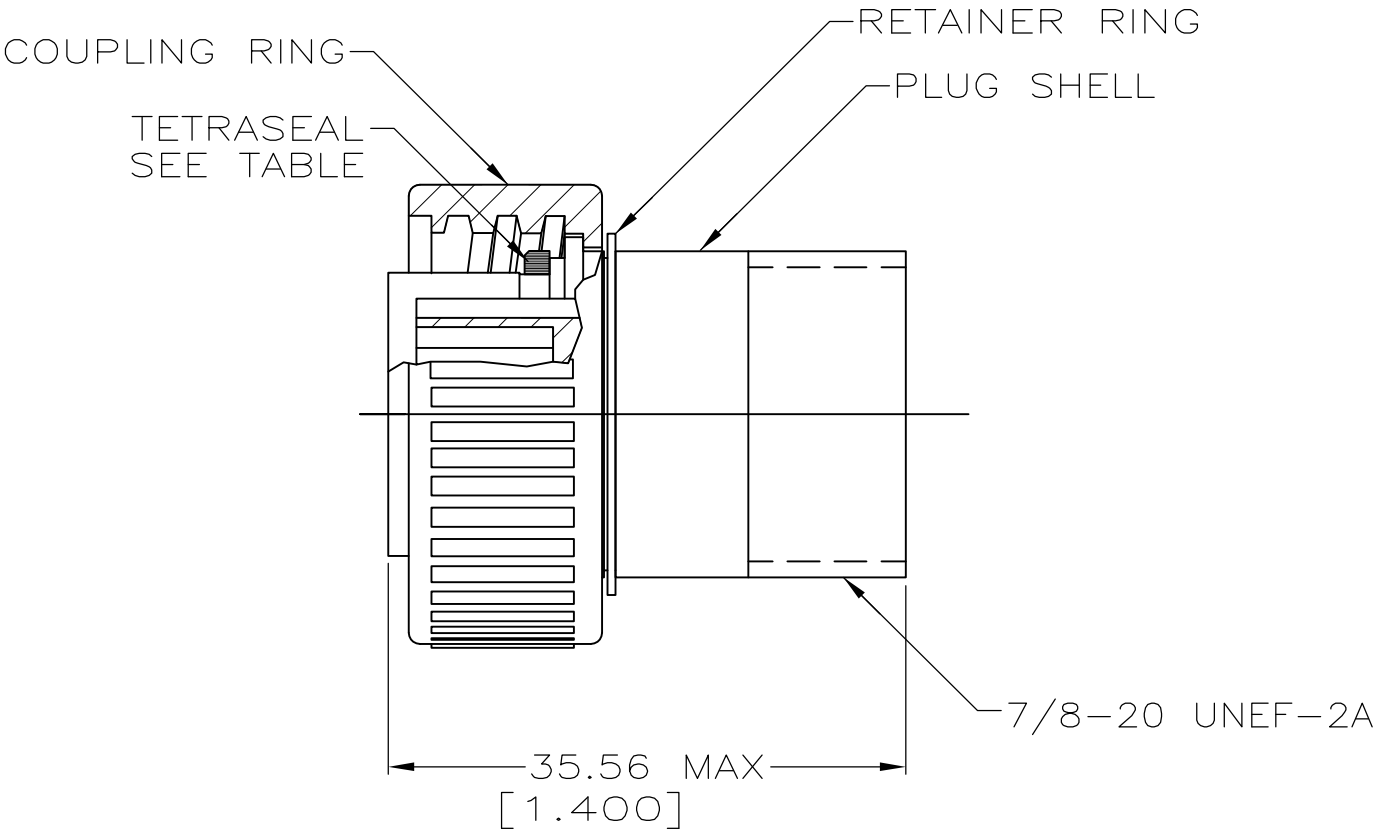


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
BD	35		H1	REVISED PER ECO-11-005027	11MAR11	RK	HMR

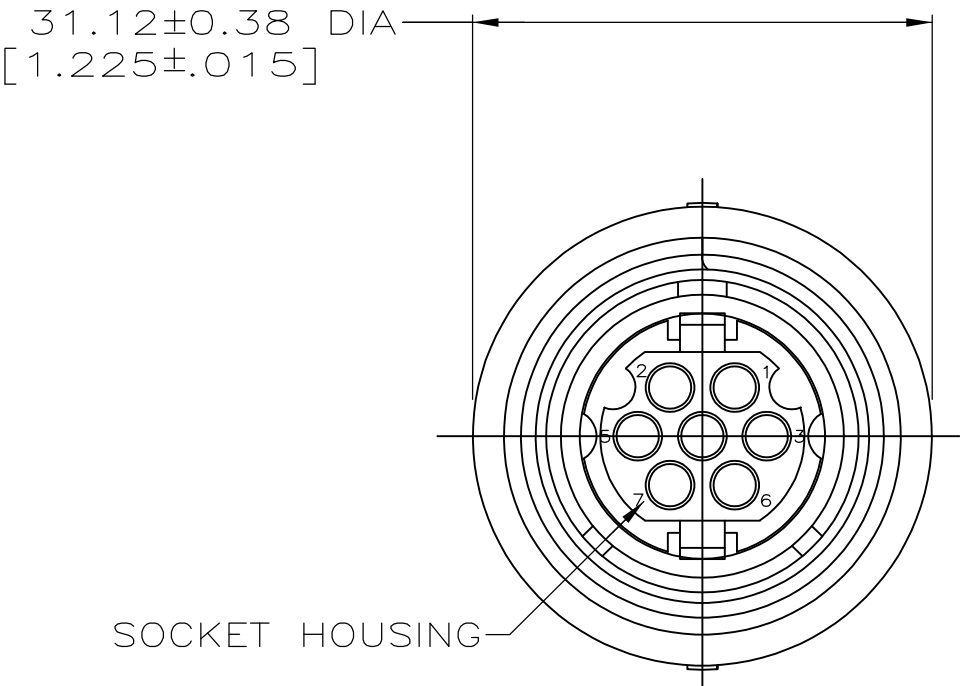

1. THIS CONNECTOR ACCEPTS SEVEN (7) SIZE 16 MULTIMATE SOCKET CONTACTS, MAXIMUM WIRE INSULATION DIA = 2.67 [.105].
2. THIS CONNECTOR MATES WITH AMP PART NUMBER 208715-1.
3. AMP PART NUMBER AND DATE CODE TO BE LOCATED ON COUPLING RING.
- 4 NICKEL PER QQ-N-290 OVER COPPER PER MIL-C-14550.
- 5 ZINC PER QQ-Z-363.

YES	208714-2
NO	208714-1
SEAL	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D.HARDY 05/23/94	TE Connectivity			
DIMENSIONS: INCHES		CHK C.DORWART 05/24/94				
		APVD A.FRANTUM 07/13/94	NAME PLUG ASSEMBLY, STANDARD SEX, SERIES 1, 14-7, CMC			
		PRODUCT SPEC	APPLICATION SPEC			
MATERIAL SKT HSG: TERMOPLASTIC, BLACK SEAL: FLUOROCARBON ELASTOMER RTNR RING: STAINLESS STEEL CPLG RING: PLUG SHELL:		WEIGHT -	SIZE A3	CAGE CODE 00779	DRAWING NO C-208714	RESTRICTED TO -
FINISH CPLG RING: PLUG SHELL:		CUSTOMER DRAWING		SCALE 2:1	SHEET 1 OF 1	REV H1