


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
CM	00		G1	REVISED PER ECO-11-004820	11MAR11	RK	HMR

D

C



B

A

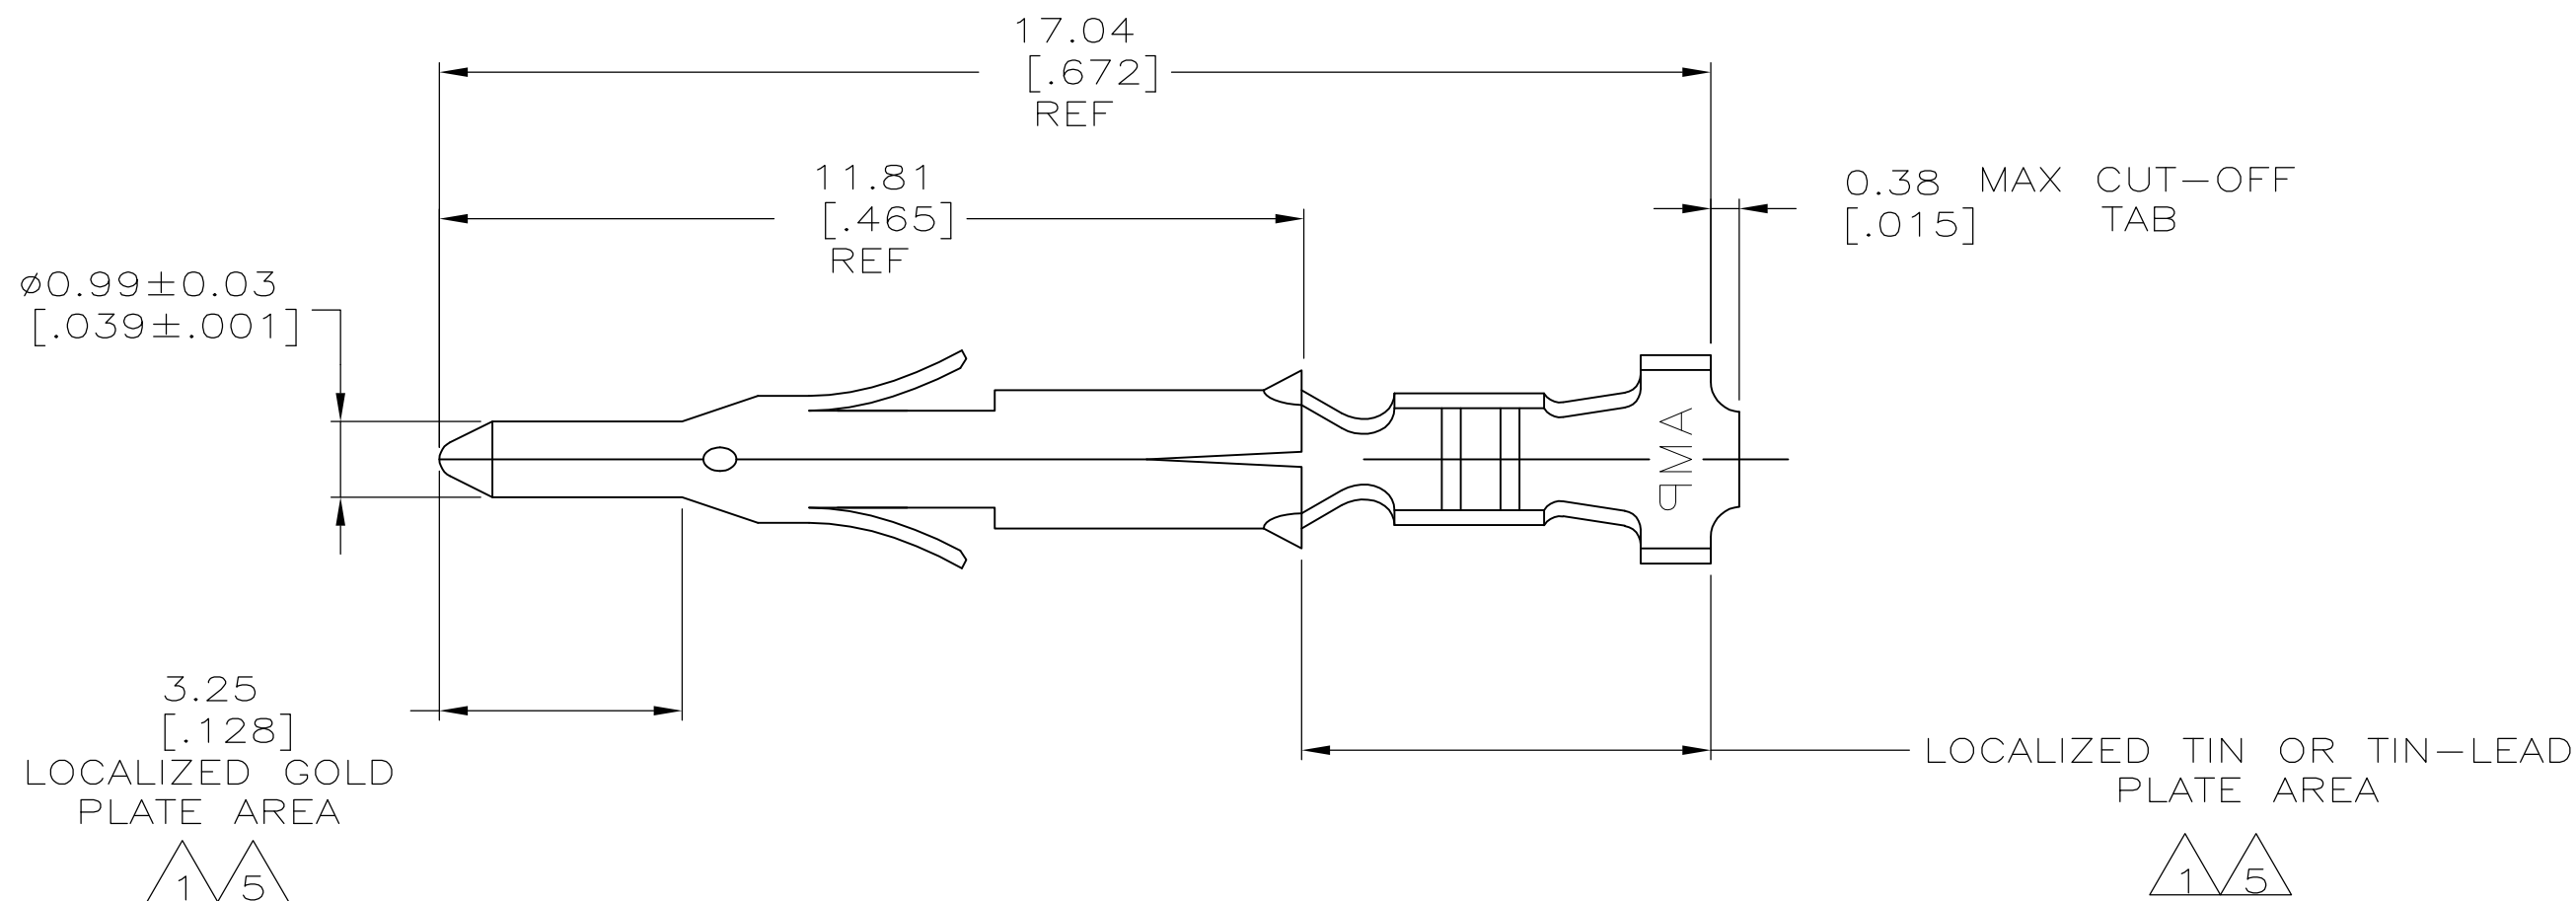


1. 0.00076 [.000030] MIN GOLD IN LOCALIZED GOLD PLATE AREA AND 0.00254 [.000100] MIN BRIGHT TIN-LEAD IN LOCALIZED TIN-LEAD PLATE AREA OVER 0.0013 [.000050] MIN NICKEL.
2. WIRE RANGE: 0.12 – 0.4mm² (26–22 AWG).
3. INSULATION RANGE: 1.20–1.75 [.047–.069] DIA.
4. DIMENSIONS IN BRACKETS ARE IN INCHES.

5. 0.00076 [.000030] MIN GOLD IN LOCALIZED GOLD PLATE AREA AND 0.00254 [.000100] MIN BRIGHT TIN IN LOCALIZED TIN PLATE AREA OVER 0.0013 [.000050] MIN NICKEL.

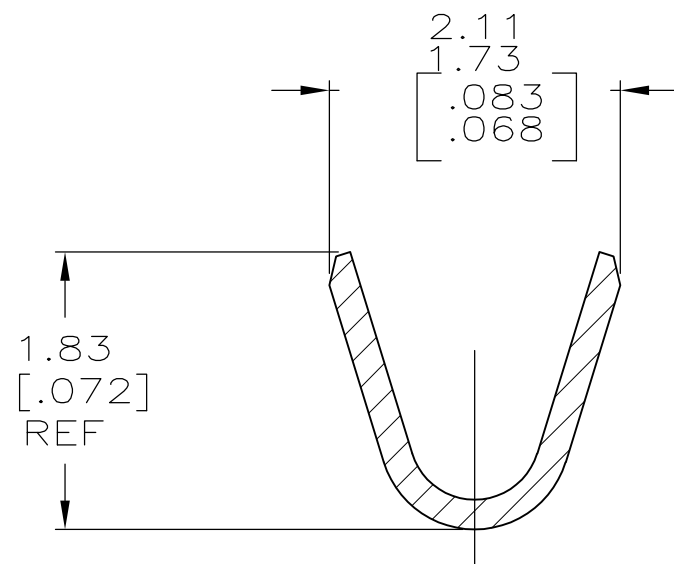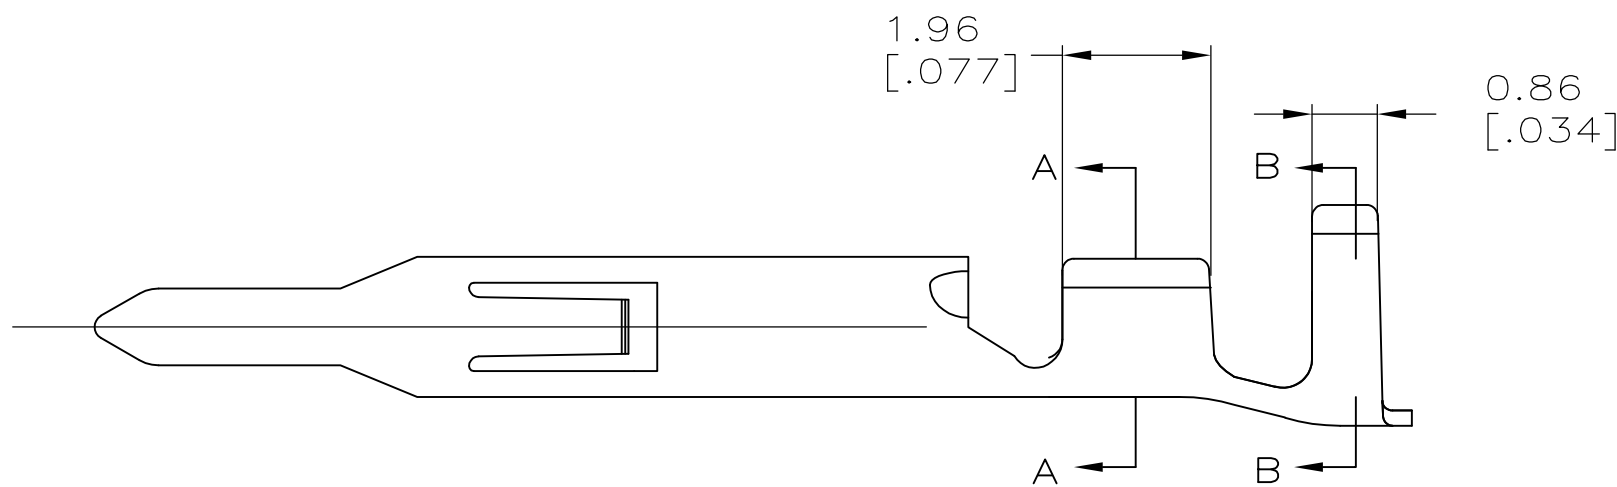

SECTION A-A
SCALE 20:1

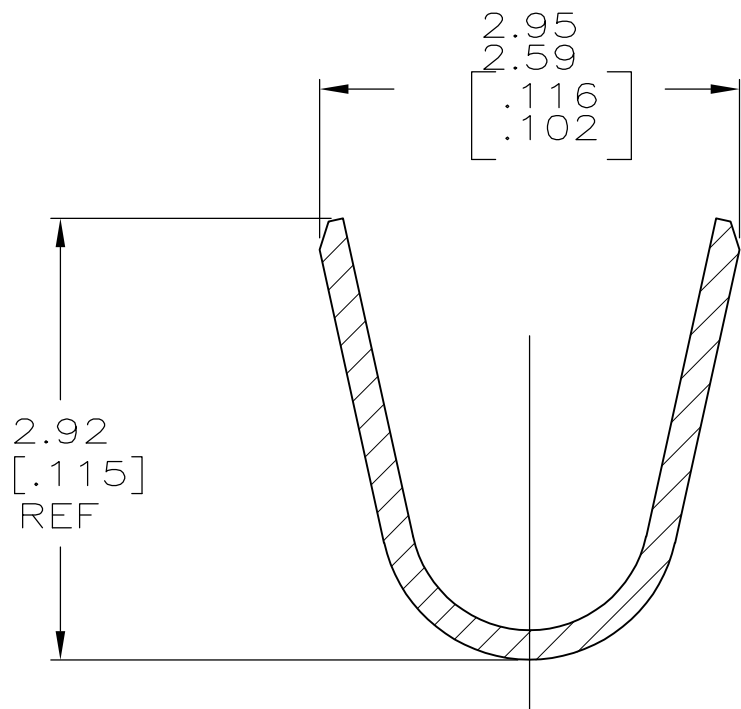

SECTION B-B
SCALE 20:1

METRIC

5	0.20 [.008] BRASS	1-770985-0
1	0.20 [.008] BRASS	770985-3
PRE-TIN	0.20 [.008] BRASS	770985-1
FINISH	MATERIAL	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. HOOVER 05MAR03	TE Connectivity			
DIMENSIONS: mm [INCHES]		CHK C. JONES 05MAR03				
		APVD C. JONES 05MAR03	NAME			
		PRODUCT SPEC	PIN, LOOSE PIECE MINI UNIVERSAL MATE-N-LOK(TM)			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC	SIZE		CAGE CODE	DRAWING NO
0 PLC ± -		—	A2		00779	770985
1 PLC ± -		—	SCALE		10:1	SHEET
2 PLC ± 0.13 [.005]		—	CUSTOMER DRAWING		1	OF 1
3 PLC ± -		—	REV		G1	
4 PLC ± -		—				
ANGLES ± -		—				
FINISH		—				