


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF AMPHENOL LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY AMPHENOL LTW.


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-0C0503	2010/11/29	Ivan	Change View

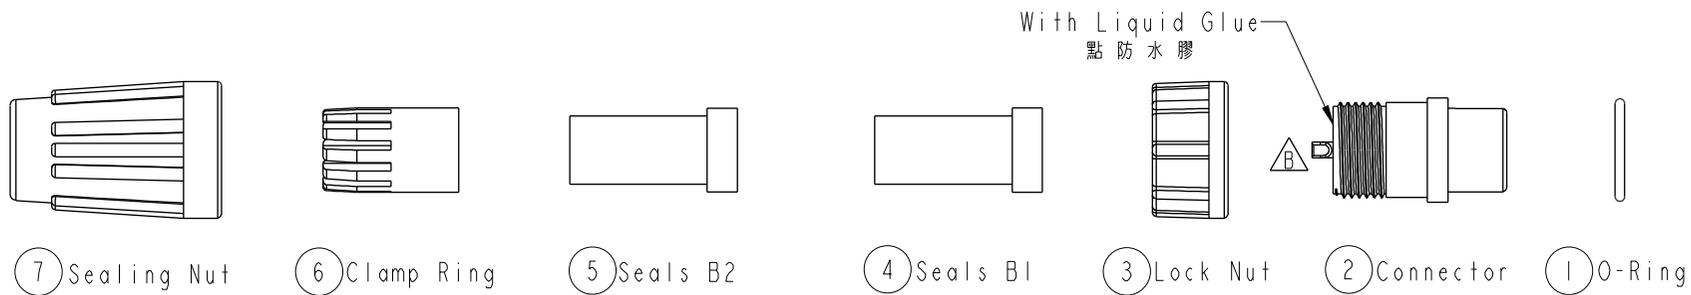


**ALTW**  
 DCC. DEPT.  
 CONFIDENTIAL  
 2012-03-15  
**ISSUED**

**ALTW**  
 CONFIDENTIAL  
 2012-03-12  
 R&D DEPT.

- Note:
- \*  $\varnothing$  Important Dimension.
  - \* Waterproof Rate : IP66
  - \* Housing: Nylon+GF, Black
  - \* Female Pin: Copper Alloy, Gold Plated
  - \* Lock Nut: Nylon+GF, Black
  - \* O-Ring: EPDM, Black
  - \* Seals: EPDM, Black
  - \* Clamping Ring: Nylon, Black
  - \* Sealing Nut: Nylon, Black
  - \* PE Bag: 90mm\*85mm
  - \* Seals B1 for Cable OD:  $\varnothing 4.5\text{mm} \sim \varnothing 6.5\text{mm}$   
(防水墊圈B1線徑:  $\varnothing 4.5\text{mm} \sim \varnothing 6.5\text{mm}$ )
  - \* Seals B2 for Cable OD:  $\varnothing 3.5\text{mm} \sim \varnothing 5.3\text{mm}$   
(防水墊圈B2線徑:  $\varnothing 3.5\text{mm} \sim \varnothing 5.3\text{mm}$ )
  - \* One Set Unassembled in One PE Bag  
(每一組未組裝, 放置於一個PE袋, 並封口)



Pin Assignments  
Front View 前視圖

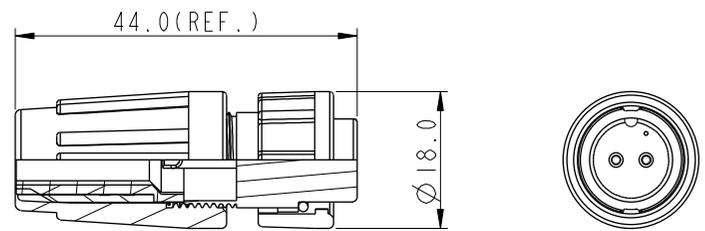

UNIT: mm		
TOLERANCE	.X ±0.25	
.XX ±0.1		
.XXX ±0.05		
ANGLES	±1°	

TITLE Standard, Assy Lock 2Pin F Conn F Pin			
SCALE 1:1	SIZE A4	SHEET 1 OF 1	
REV. B	WC-REV. A.2	$\varnothing$ : Inspection item	

**Amphenol LTW**  
 安費諾亮泰企業股份有限公司

ITEM NO. BD-02BFFA-LL6001	DRAWN BY SamChang	DATE 2012-03-12
DWG NO. BD-02BFFA-LL6001	CHECKED BY Jeffrey	DATE 2012-03-15
CUSTOMER ALTW	APPROVED BY Kevin	DATE 2012-03-15