

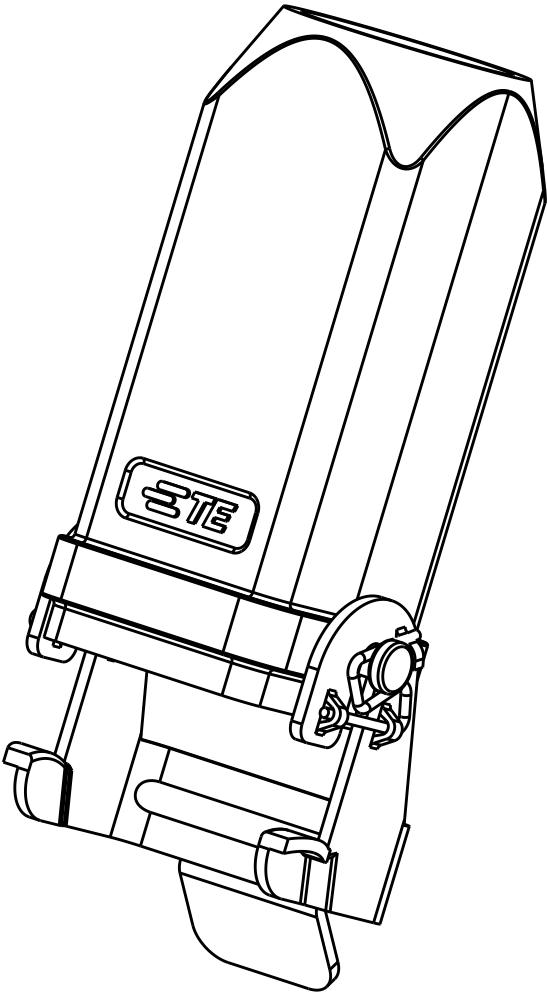
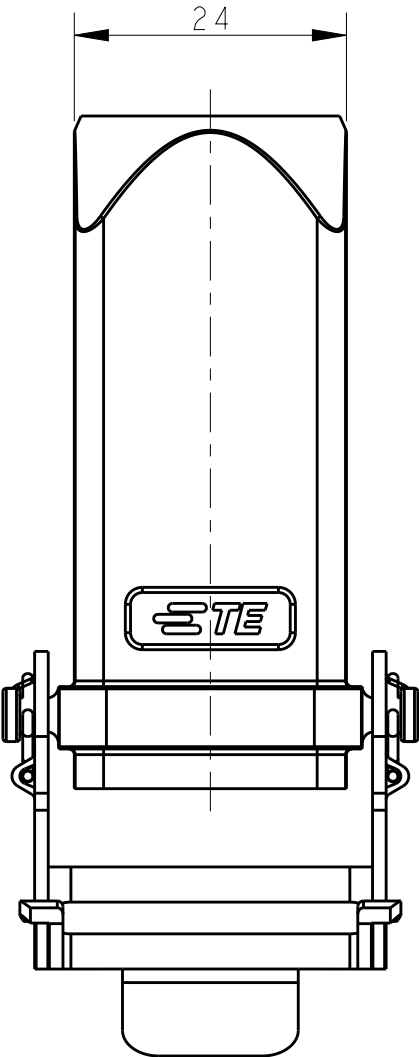


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL RELEASE	04MAY2015	DL	CW
	A1	REVISED PER ECR-18-004096	16MAR2018	RG	CW

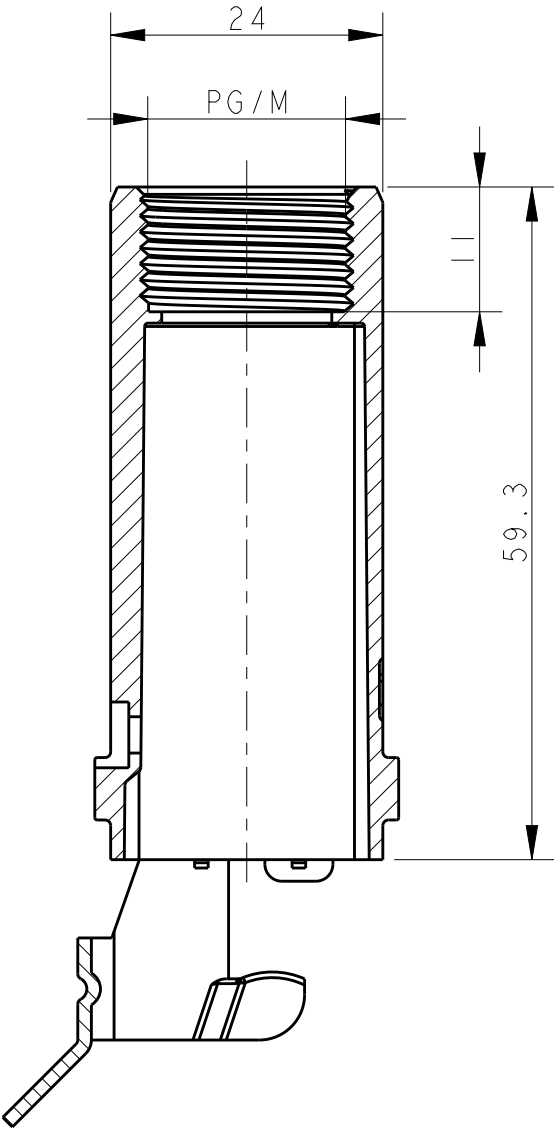


NOTES:
1. TECHNICAL CHARACTERISTICS:
BODY MATERIAL: DIE CAST ZINC ALLOY
SURFACE TREATMENT: POWDER-COATED, GRAY OR RED
OPERATION TEMPERATURE: -40-+125°C
DEGREE OF PROTECTION: IP65 (MATED)

注释:
1. 技术参数:
主体材料: 锌合金
表面处理: 粉末喷涂, 灰色 或 红色
工作温度: -40-+125°C
防护等级: IP65(配合)

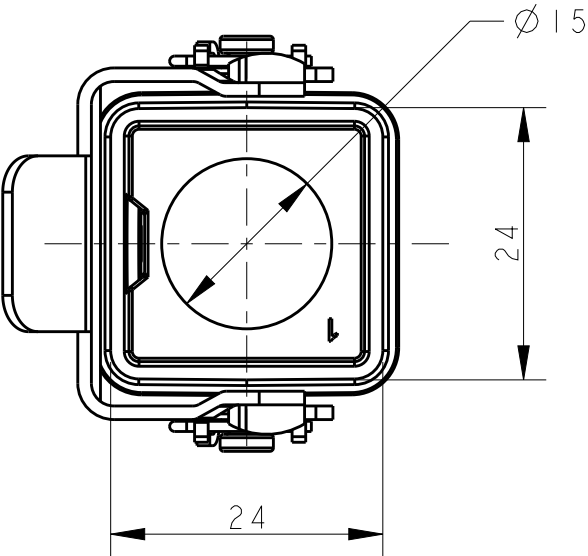

T1737030111-000	H3A-MTGVB-PG11	RED RAL2004	PG11
T1739030111-000	H3A-MTGVB-PG11	GRAY	PG11
T1739030120-000	H3A-MTGVB-M20	GRAY	M20
ASSEMBLY PART NUMBER	ASSEMBLY PART DESCRIPTION	SURFACE COATED COLOR	PG/M

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 04MAY2015 DAVID LI		 TE Connectivity						
		CHK 04MAY2015 CHRIS WANG								
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD 04MAY2015 XU XIANG						
		0 PLC ±-		NAME H3A-MTGVB-PG/M						
		1 PLC ±-								
		2 PLC ±-								
		3 PLC ±-								
4 PLC ±-		PRODUCT SPEC								
		108-137012								
		APPLICATION SPEC								
		114-137012								
MATERIAL		FINISH		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO			
-		-		A3	-	C-T17390301XX000				
-		-		CUSTOMER DRAWING				SCALE 3:2	SHEET 1 OF 1	REV A1