



LOADING PATTERN MATING SIDE

f	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	
e	4	4	4	4	4	4	4	4	4	4	7	7	7	7	7	4	4	4	4	7	7	7	7	7
d	4	4	4	4	4	4	4	4	4	4	7	7	7	7	7	4	4	4	4	7	7	7	7	7
c	4	4	4	4	4	4	4	4	4	4	7	7	7	7	7	4	4	4	4	7	7	7	7	7
b	4	4	4	4	4	4	4	4	4	4	7	7	7	7	7	4	4	4	4	7	7	7	7	7
a	4	4	4	4	4	4	4	4	4	4	7	7	7	7	7	4	4	4	4	7	7	7	7	7
z	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	
P	0				0					1					1				2					2
O	1				5					0					5				0					5
S																								


LOADED CONNECTOR ASSEMBLY (FOR EXAMPLE)

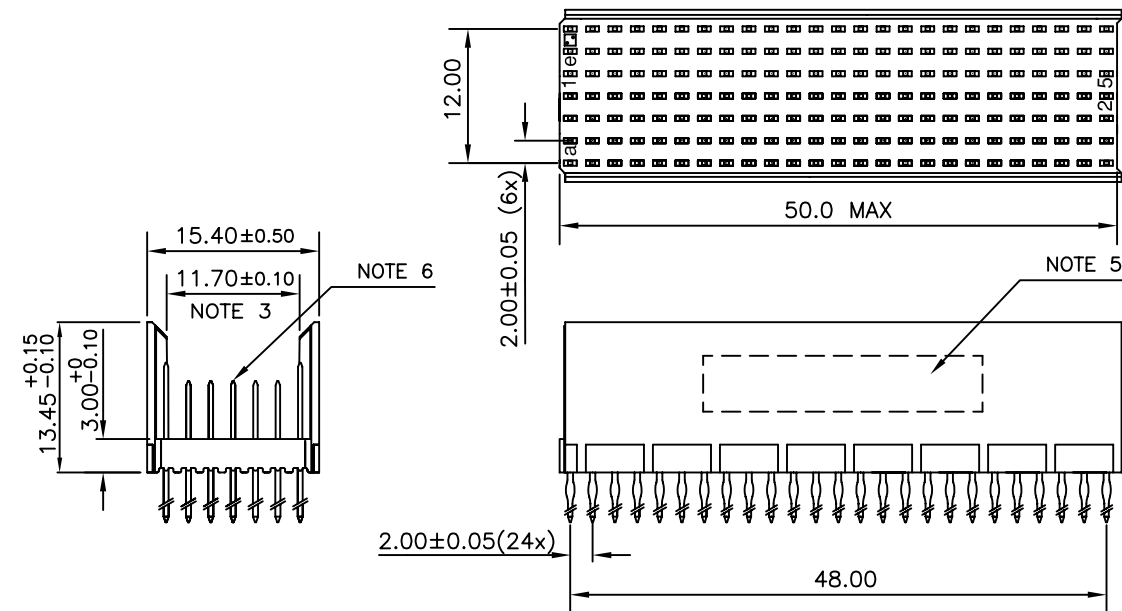

CONTACT OVERVIEW

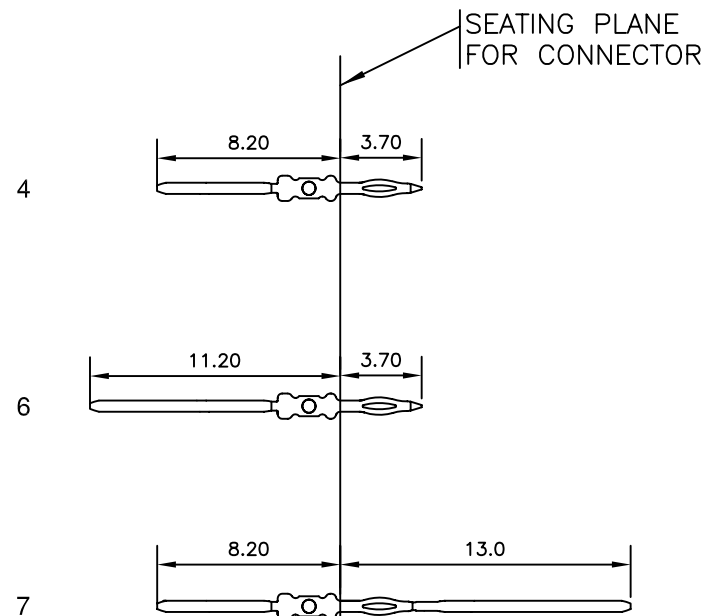

LAY-OUT P.C.B.-HOLE

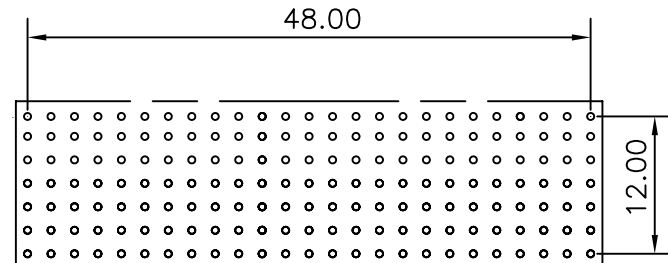


HM2P08PKM381  LEAD FREE INDICATOR : LF = LEAD FREE (DIGIT 15 & 16)

PLATING CODE (DIGIT 13 AND 14)
(REF DRW NO. BS,C , 201844 , 003)

NOTES

- THIS PRODUCT IS CSA APPROVED.
 - THIS PRODUCT IS UL RECOGNIZED.
 - MEASURED AT THE BOTTOM.
 - MATERIAL CONTACT: PHOSPHORBRONZE
HOUSING: CREAM WHITE GLASS FILLED POLYESTER UL-94V0
 - CONNECTOR PRINTED WITH P/N AND DATE CODE.
 - FOR ACTUAL CONTACT LOADINGS, SEE LOADING PATTERN MATING SIDE.
 - SHAPE OF CONNECTOR HOUSING CAN ALTER DEPENDING ON PRODUCTION LOCATION
 - THE PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
 - FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING : BS, A , 201572 , 001
- CATALOG NO: HM2P08PKM381----

mat'l. code SEE NOTE 4				surface ISO 1302 		tolerance ISO 406 ISO 1101		projection 		product family MILLIPACS													
ltr	ecn no		dr	date		tolerances unless otherwise specified						title MPACS 5+2R STR HDR PF CONN TYPE B											
A	109-0135		GT	2009-07-10		angles 0°±1°	linear	.0±0.2														scale —	
								.00±0.1															
						dr	GEORGE THOMAS		2009-07-10				dwg no				sheet 1 of 1				size		
						engr	ALEX BABU		2009-07-10				BS, C ,203028, 879				A3						
						chr	ALEX BABU		2009-07-10														
						appd	ALEX BABU		2009-07-10				type				Product Customer Drawing						
sheet index		revision sheet		A	1																		