

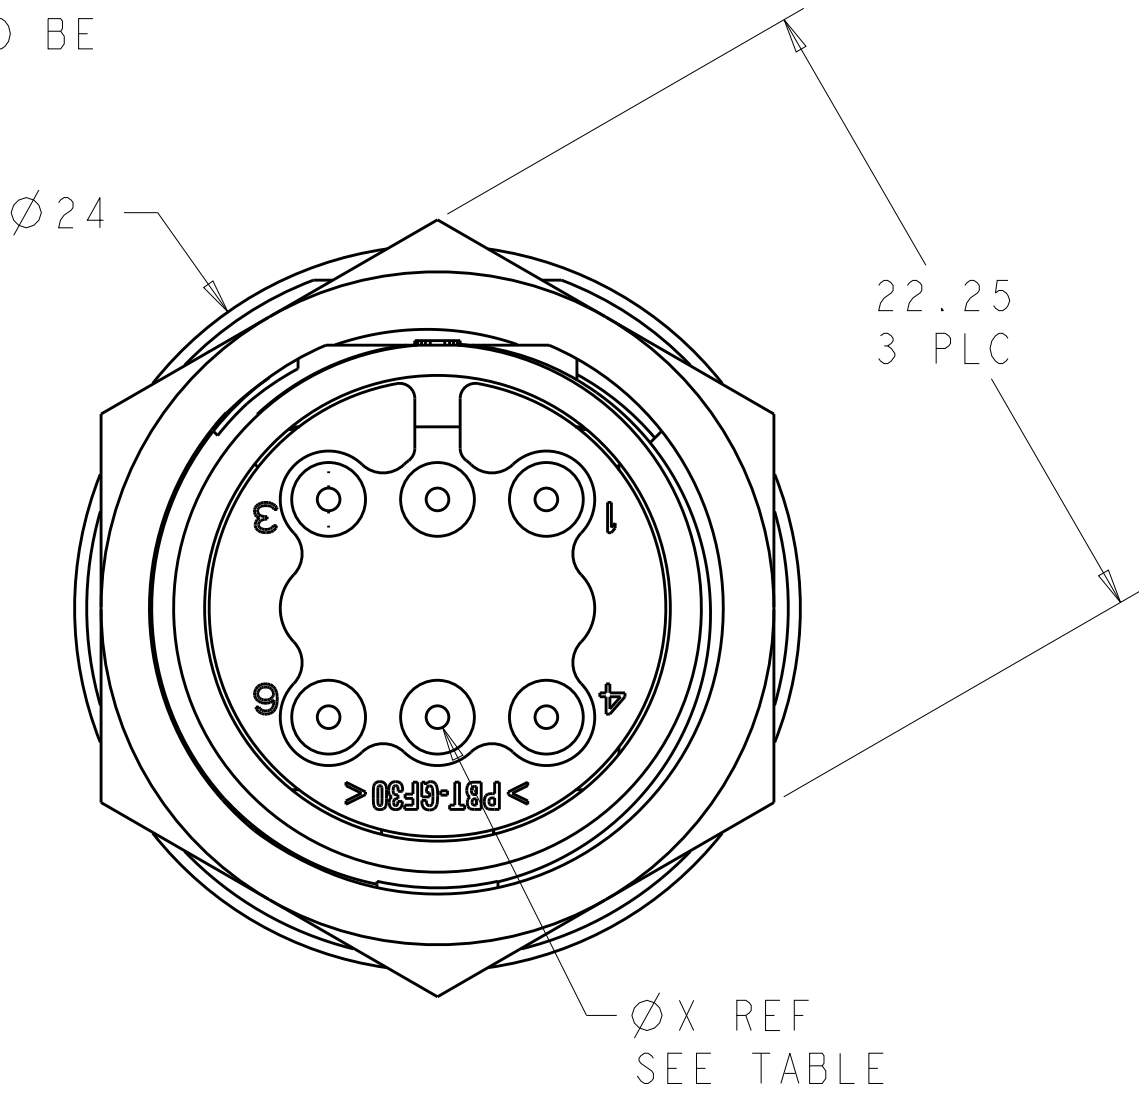
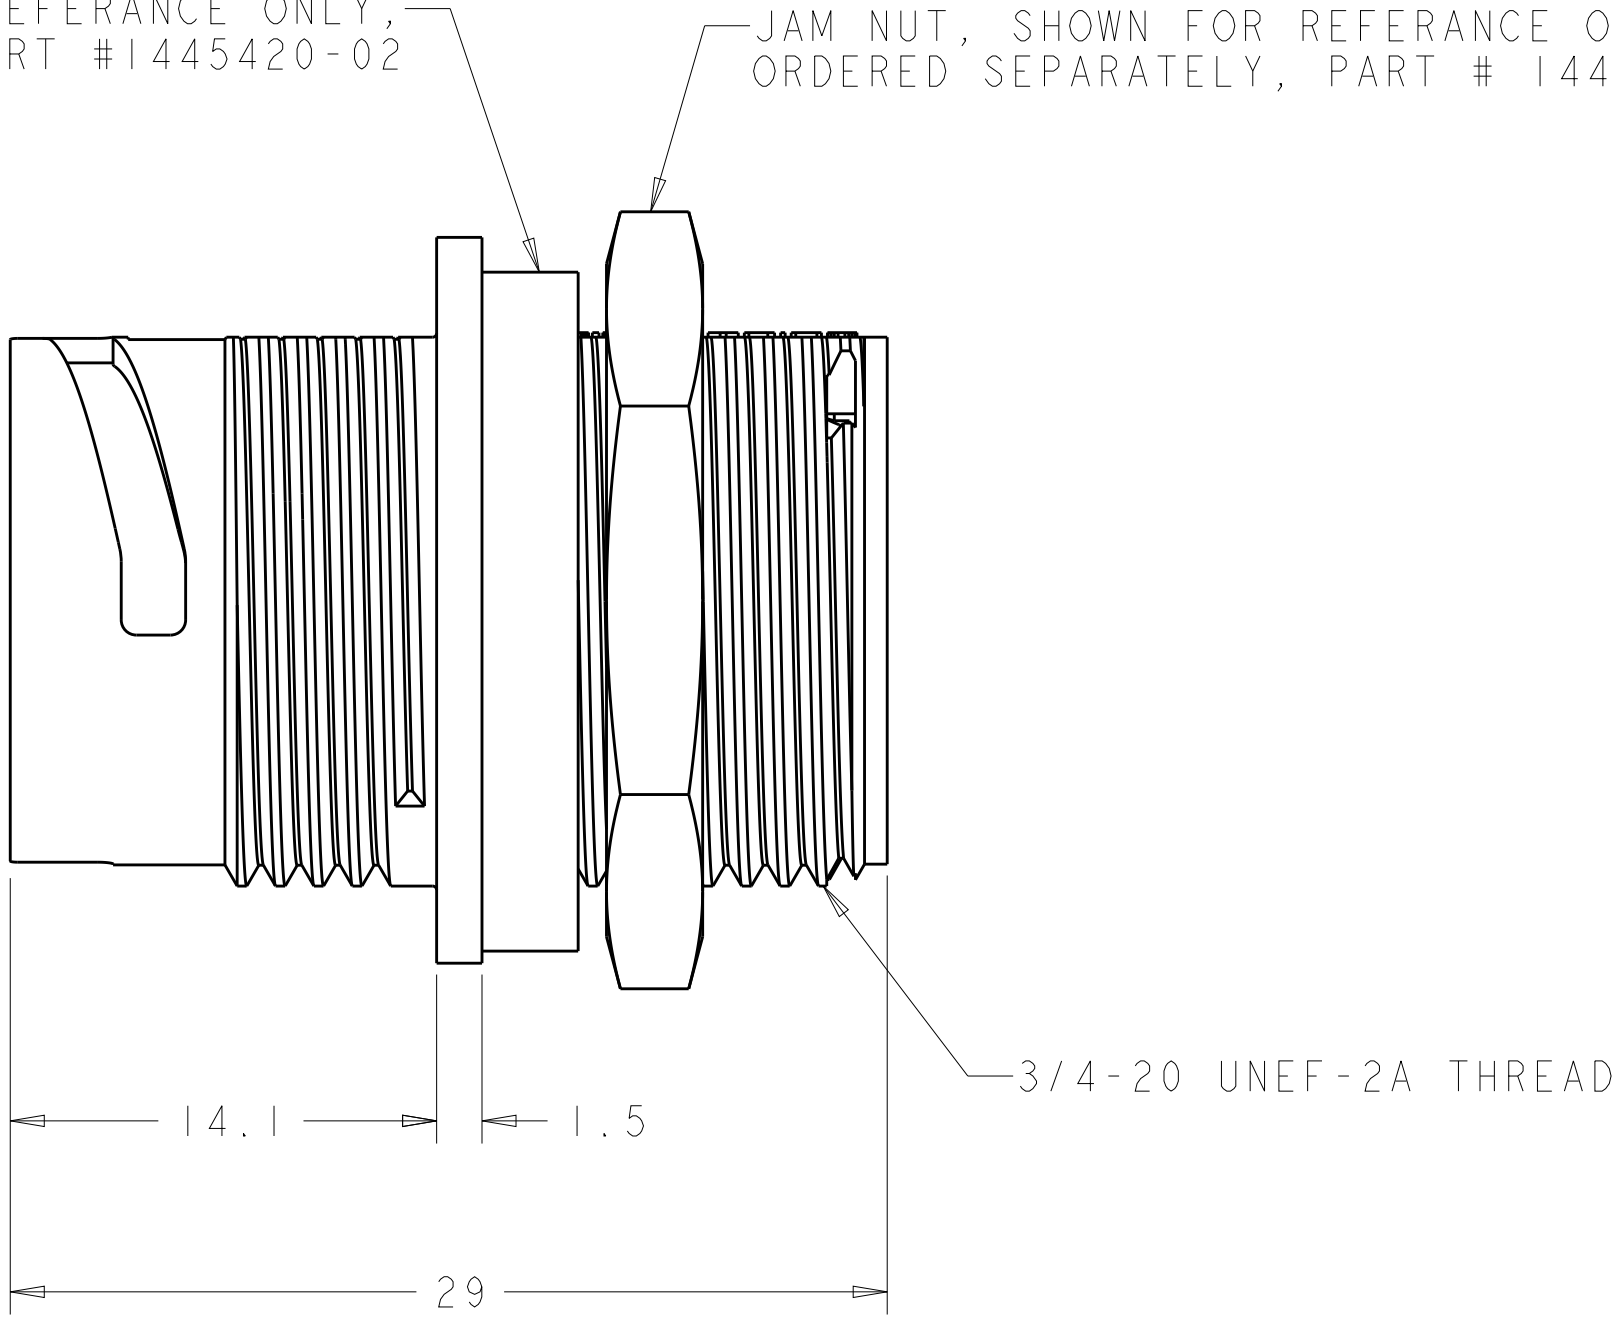
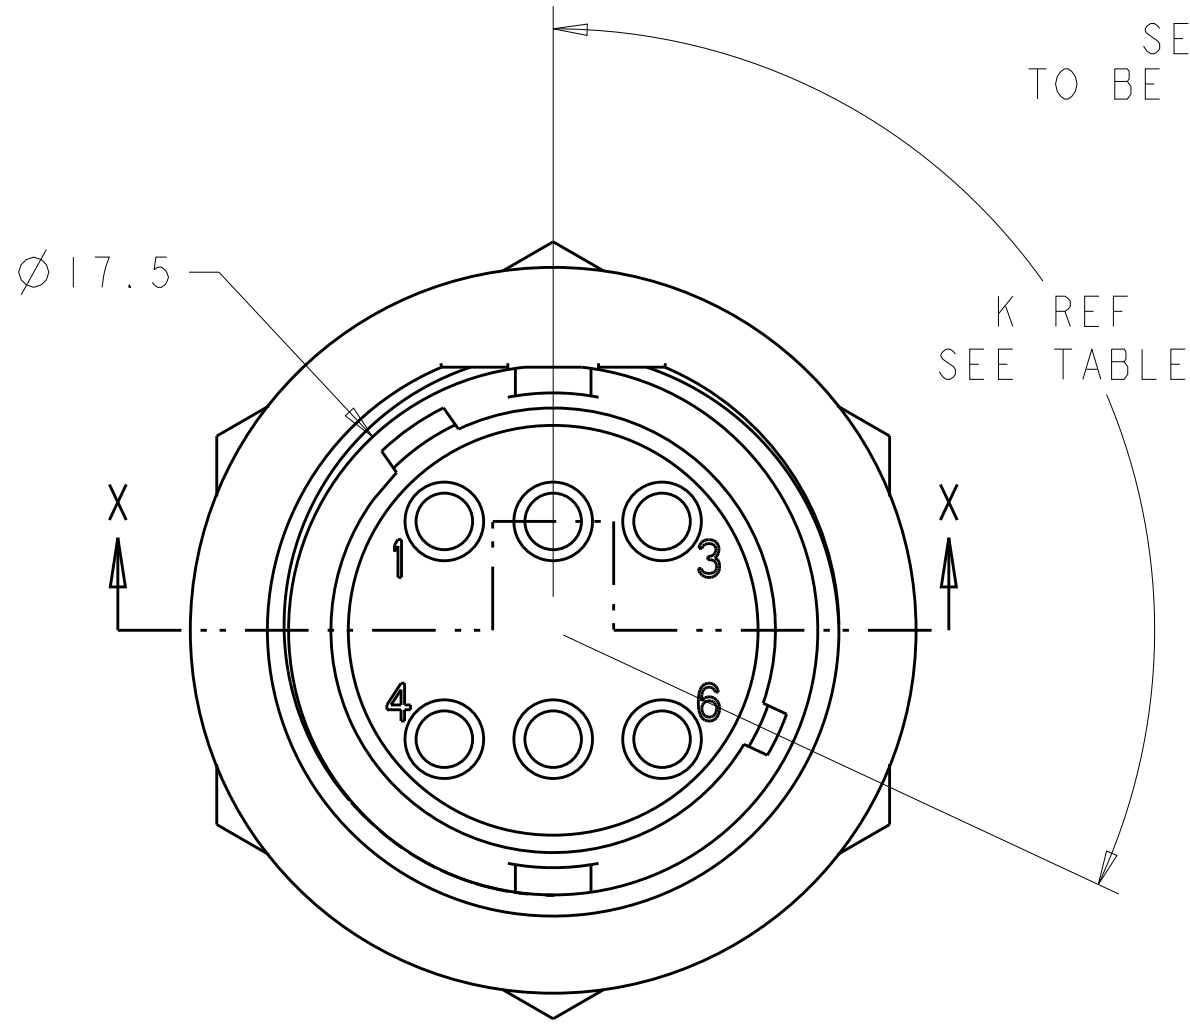


REVISIONS					
P.	LTR	DESCRIPTION	DATE	DWN	APVD
	B2	REVISED PER ECO-15-010004	13JUL2015	NK	MZ
	C	REVISED PER ECO-16-018352	24MAR2017	RS	MZ

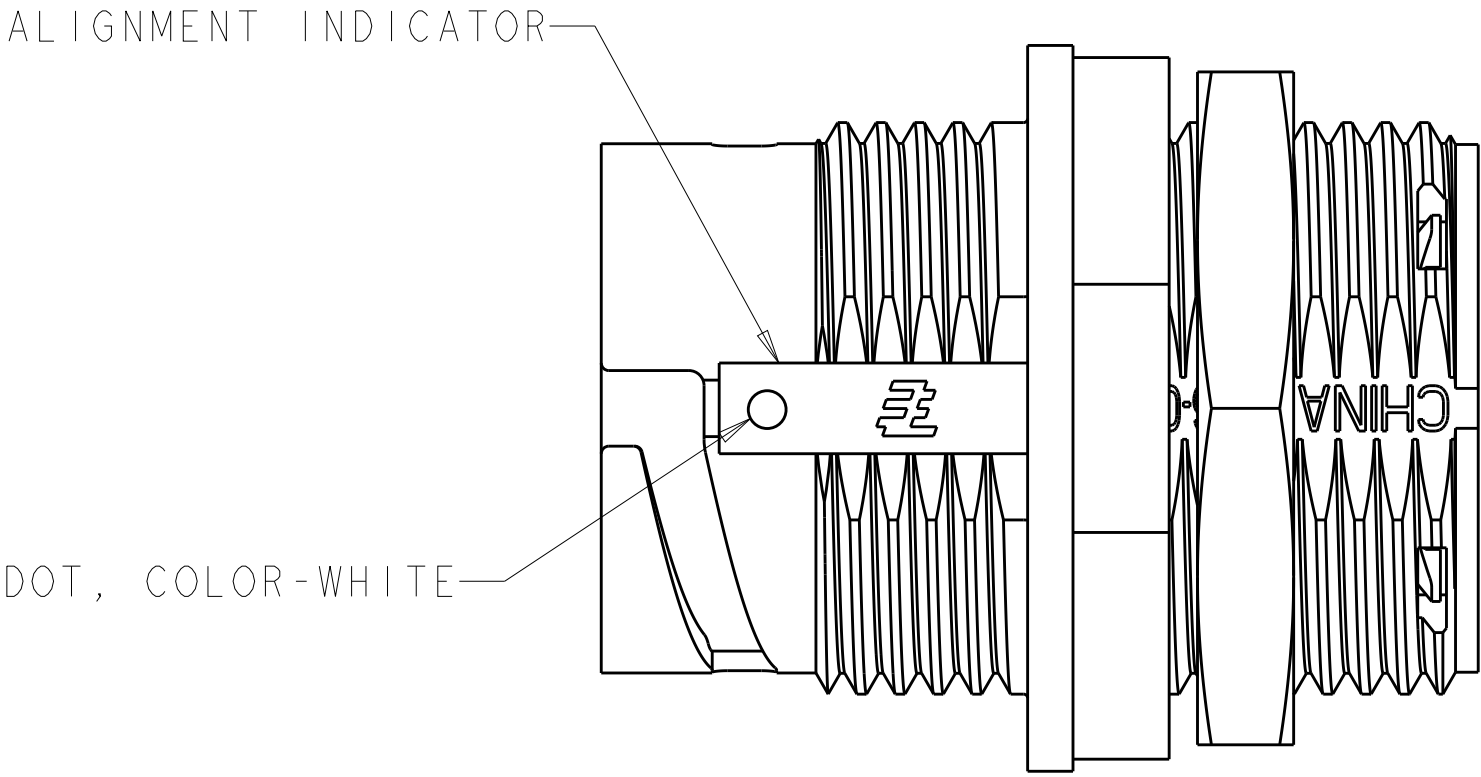


SEAL, PERIPHERAL; QTY-1
MATERIAL: ELASTOMER, COLOR-GRAY

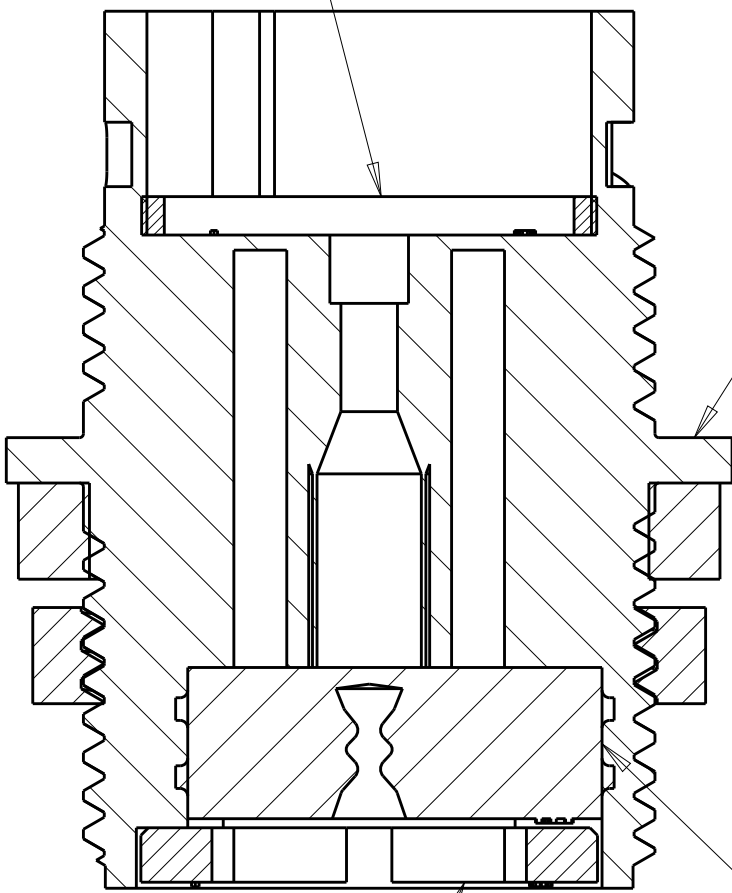

SECTION X-X

1. CONNECTOR CAN BE FRONT OR REAR PANEL MOUNTED.
2. MAX PANEL THICKNESS - 3.18

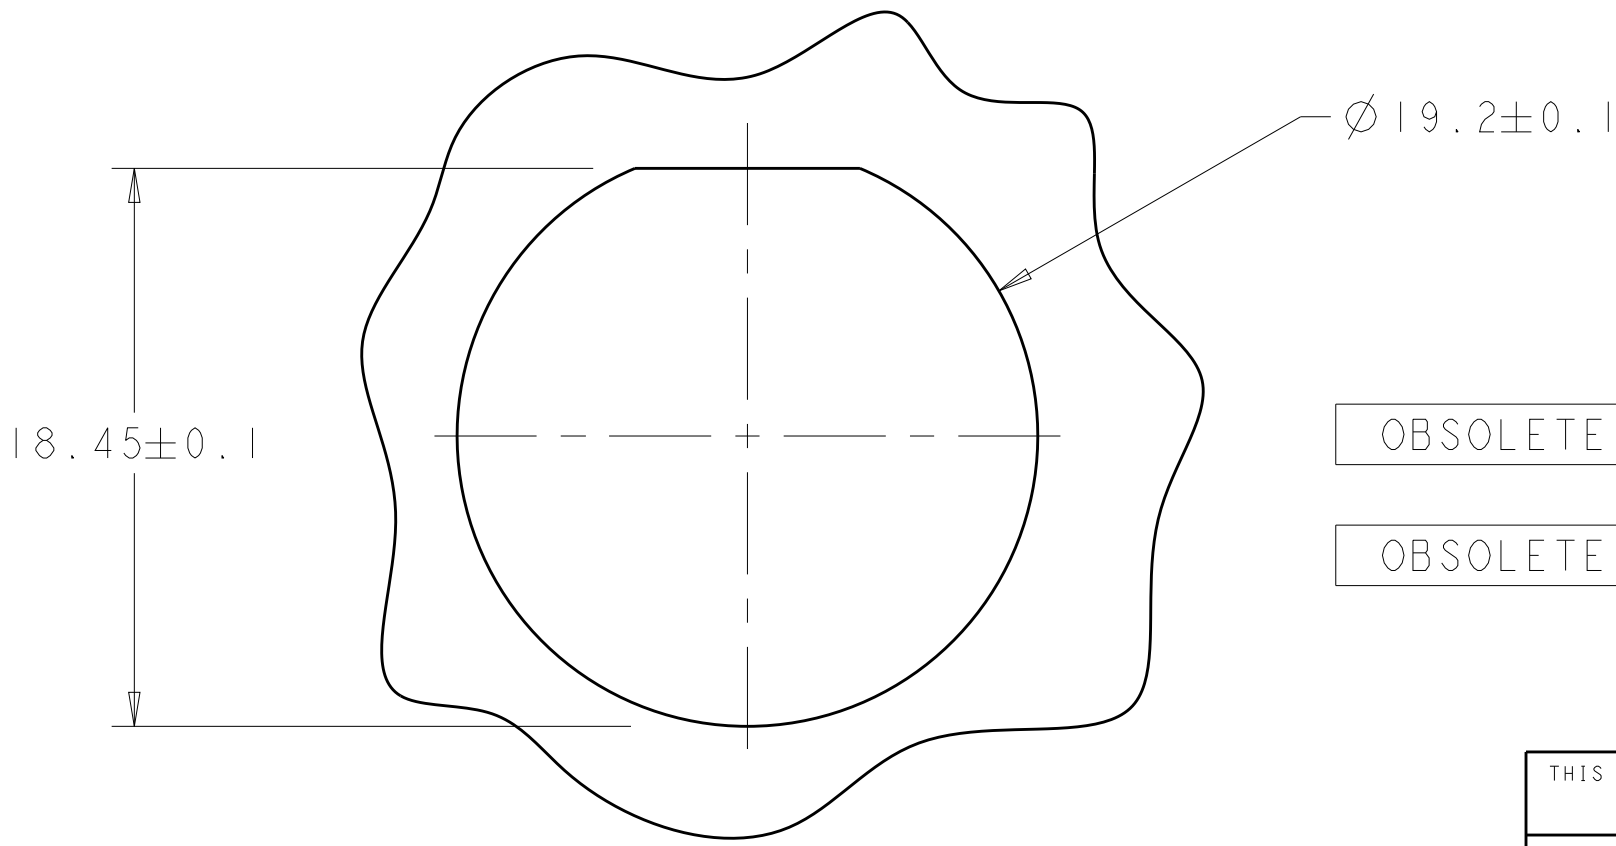

OBSOLETE	YELLOW	Ø 0.75	135°	1445823-04
	NATURAL	Ø 1.5	115°	1445823-03
OBSOLETE	NATURAL	Ø 1.5	135°	1445823-02
	YELLOW	Ø 0.75	115°	1445823-01
SEAL, WIRE ENTRY COLOR		Ø X REF	K REF	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN SHANE WIESE	5OCT2001	TE Connectivity	
		CHK G DOUTY	15OCT2001		
DIMENSIONS:		APVD H. WAKEEM	13JUN2003	NAME ASSEMBLY, RECEPTACLE, SIZE 11, 6 POSITION, PANEL MOUNT, SEALED, MINI CPC	
mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		SIZE CAGE CODE DRAWING NO	
		0 PLC ±		A100779C=1445823	
		1 PLC ±		RESTRICTED TO	
		2 PLC ±0.13		SCALE 4:1	
		3 PLC ±		SHEET 1 OF 1	
		4 PLC ±		REV C	
		ANGLES ±			
		FINISH			
MATERIAL SEE CALLOUT		SEE CALLOUT			
		CUSTOMER DRAWING			