
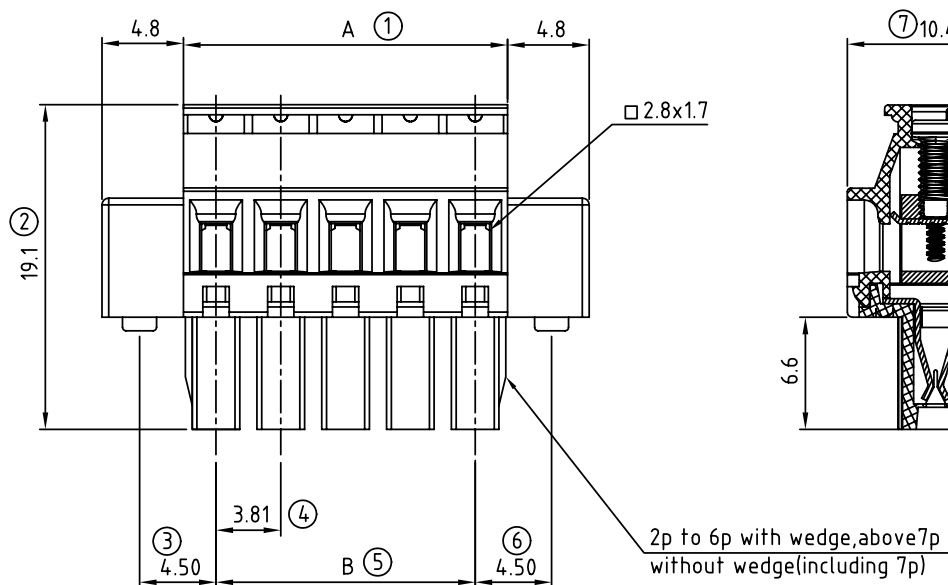


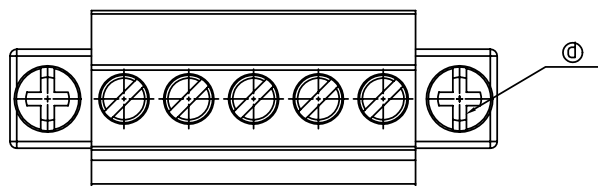

DIMENSION
N = Number of contacts

A	NX3.81
B	(N-1)X3.81

Poles	Tolerance
2p-6p	±0.15
7p-12p	±0.20
13p-16p	±0.25
17p-24p	±0.30

SIGN	DATE	DESCRIPTION	APPROVER
△	8/07'06	Added VDE standard	梁仁松
△	12/02'08	With flange screw changed from "-" slot type to "+/-" slot type	Jacke
△	12/02'08	The temperature is changed from -30°C,+105°C to -40°C +115°C	Jacke
△	2010.11.26	The tolerance is changed	Jacke
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

Material

- Item a Clamp: Brass(CuZn) Ni plated
- Item b Terminal screw: Steel Zinc plating "-" slot type
- Item c Female contact: PhBz Tin plated
- △ ● Item d With flange screw: Steel Zinc plating M2.5 "+/-" slot type
- Item e Terminal(housing): Thermoplastic (UL94V-0)
- Item f Terminal(cover): Thermoplastic (UL94V-0)

△ Electrical cULus/VDE

- Voltage rating: 300VAC/300VAC
- Current rating: 8A/10A
- Wire range: 1.5mm²
- Solid wire(AWG): 16-28
- Stranded wire(AWG): 16-28
- Torque: 1.7Lb-In./0.2Nm
- Screw: M2
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV/2.5KV
- △ ● Operating temperature: -40°C to +115°C
- Safety approval: cULus VDE

TS xx 3 1 x D xxxx G

No. OF POLES → 02: 2 POLES
: 24: 24 POLES

Color → 0 Black (RAL9005)
2 Red (RAL3001/D)
3 Orange(RAL2011/P)
4 Yellow(RAL1018/A)
5 Green(RAL6018/T)
6 Blue (RAL5015/A)
8 Grey(RAL7035/D)

RoHS pb<40, 000ppm
0000 Standard @ Logo
000A Standard ANY Logo
Any special item by customer request, please contact sales department.

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		TS-3.81mm Series With flange (for latch on back side)				
PART NO.		TSxx31xDxxxxG		DWG NO.	8TS0304	
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance	
		Jacke 2010.11.29	Jacke 2009.12.23		UNIT: mm	X. ±0.50
					SCALE: NONE	X.X ±0.30
					REV.: G	X.XX ±0.10
				SHEET: 01/01	X° ±1°	