

a) Part as supplied

202A111-*-G06

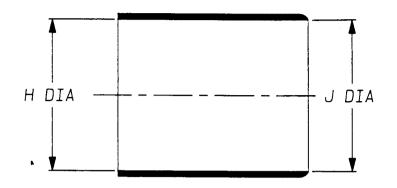

b) Part after unrestricted recovery

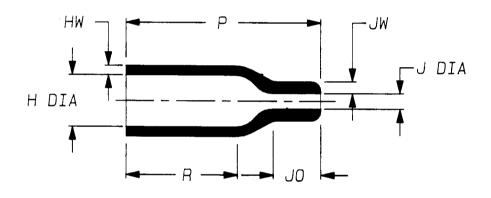

DIMENSIONS (in millimetres)

Part No.	Min Max		J Min Max a b		±10%	±10%	±10%	±20%	±20%	
202A111-*-G06						·		 		

THIS VARIANT HAS A REDUCED "J" DIA MODIFIED DIMENSIONS ARE SHOWN THUS: -

Copyright(!)

Urheberrechte

The copyright in this drawing is the property of Raychem Ltd. The drawing is issued on condition that it is not copied, reproduced or disclosed to a third party, either in whole or in part without the prior written consent of Raychem Ltd.

Drawn A.LILLEY.

Checked &

Issue

Date November 1997 Conforms to ISO Recommendations 3rd Angle Projection Not to Scale

Approval Design D

MKTG. IL


26/4/97

Iss. Date E.C.R. No.

MATERIAL DASH NUMBER

Details of Change

Ordering Information

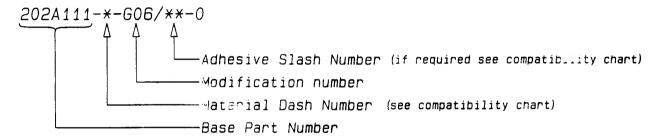

(COMPATIBILITY CHART)

COATING SLASH NUMBER

•	 		 	 	 	 	 	_

MATERIAL DESCRIPTION

-3 POLYOLEFIN. SEMI-RIGID /42./86 -4 POLYOLEFIN. FLEXIBLE /42./86 -25 ELASTOMER. FLUID RESISTANT /86./225

AS SUPPLIED DIMENSIONS ARE FOR UNCOATED PARTS, WHEN COATING IS ADDED, ENTRY DIAMETERS WILL REDUCE BY 1.5mm MAX.

Raychem Electronics OEM Division Europe Swindon, Wiltshire, England. Telephone: (01793) 528171 Fax: 573923

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

<u>TE Connectivity</u>: 202A111-25-G06-0