


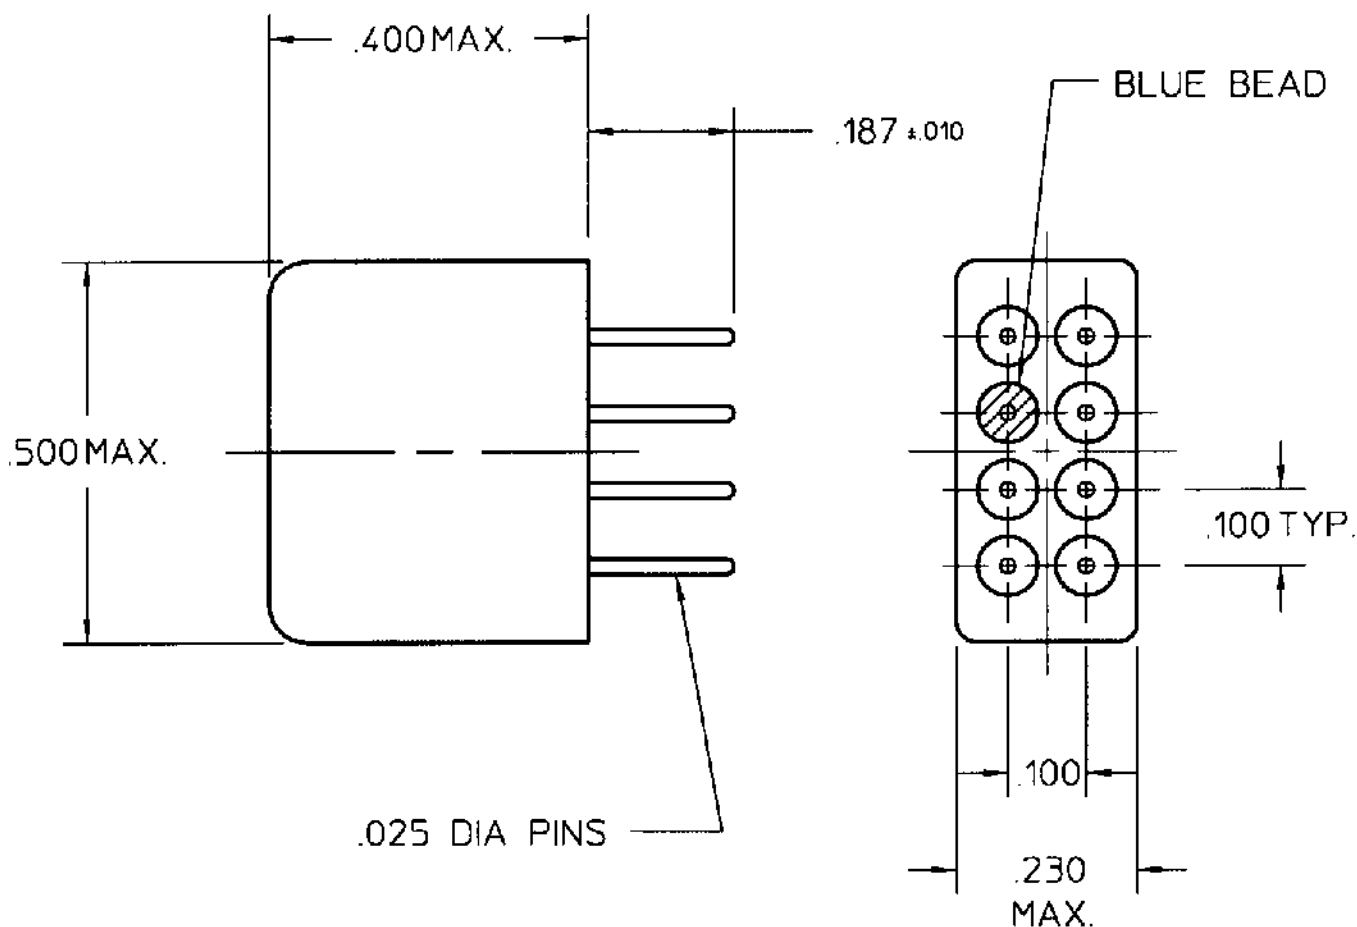

REV. 4 8/31/95

COIL:

RESISTANCE 1500 OHMS ± 10%

NOMINAL VOLTAGE 26.5 VDC

MUST OPERATE 13.5 VDC

MUST RELEASE 1.5 VDC

ENVIRONMENT:


VIBRATION 10 CPS TO 2000 CPS @ 20 g's

SHOCK 100 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: (LEVEL L ACCEPTANCE TESTING ONLY)

CUSTOMER DATA SHEET

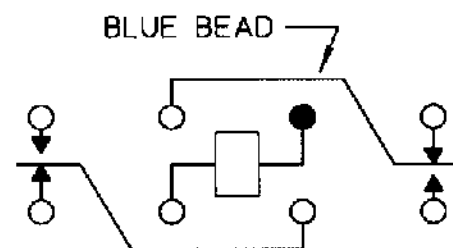

CONTACT RATING:
1 AMP 28 VDC RESISTIVE
100,000 OPERATIONS

DR. R.B. 1/21/93 CK. 8/31/95

COMMUNICATIONS
INSTRUMENTS, INC.

CUST. QPL
CUST. NO. M39016/34-008

TYPE "MFW" RELAY

MF W1201N03