


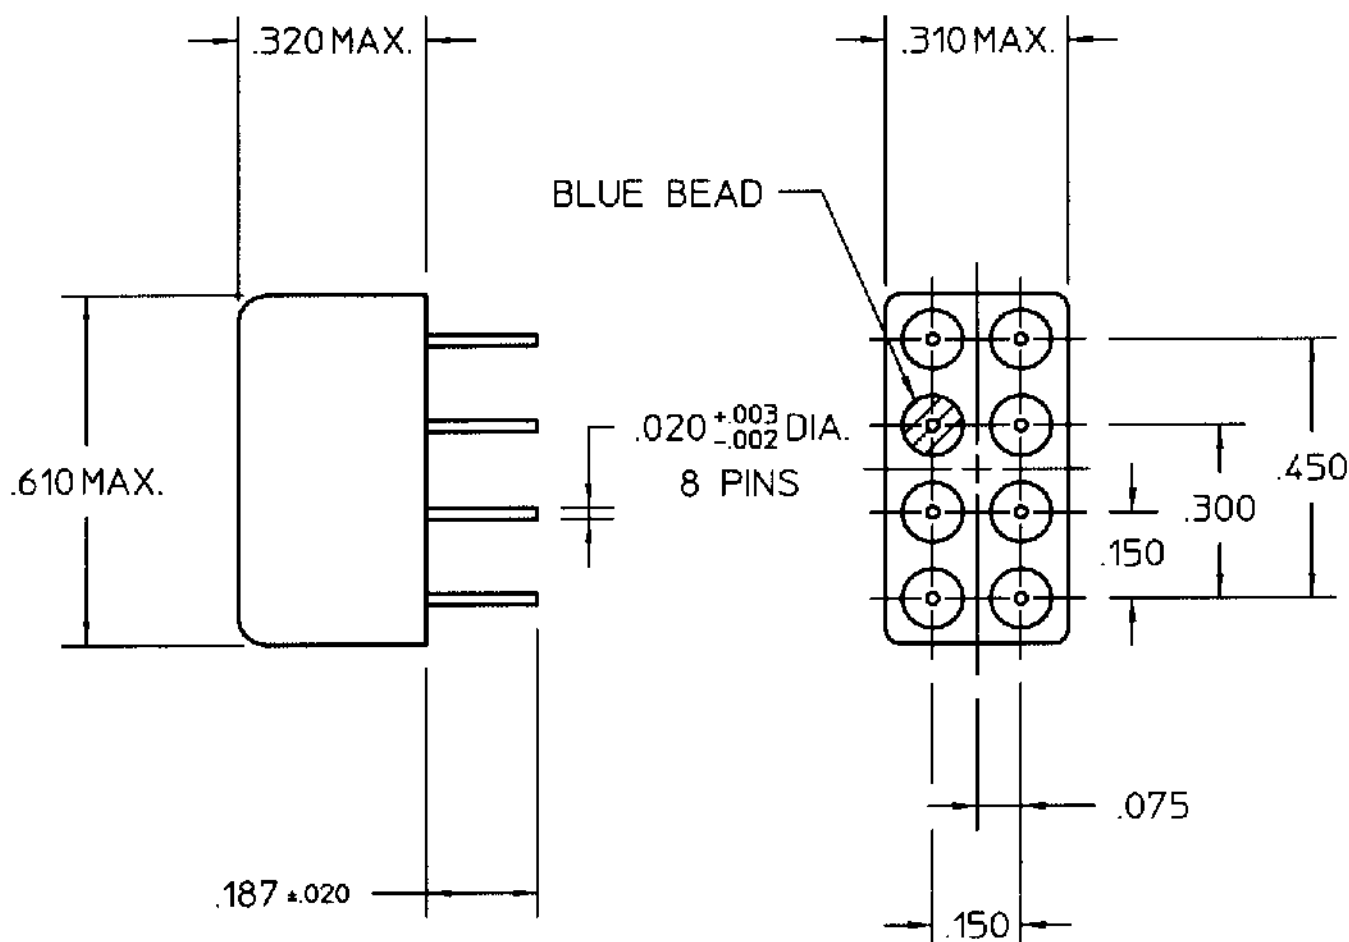

REV. 1

DCO 141326

COIL: @ 25°C  
 RESISTANCE 56 OHMS ± 10%  
 NOMINAL VOLTAGE 6.0 VDC  
 MUST OPERATE 2.7 VDC

MUST RELEASE 1.6 VDC MAX, 0.3 VDC MIN.

ENVIRONMENT:


VIBRATION 10 CPS TO 3000 CPS @ 30 g's

SHOCK 75 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE & RELEASE 4 MS MAX.  
BOUNCE 2 MS MAX.

CUSTOMER DATA SHEET

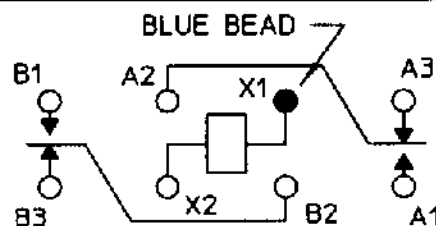

TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO  
2 AMPS 28 VDC RESISTIVE  
50,000 OPERATIONS

DR. R.B. 4/29/98 CK. G9H 9/20/99

**COMMUNICATIONS**  
**INSTRUMENTS, INC.**

CUST. QPL  
 CUST. NO. M39016/13-055L REV.       

'3SBC' RELAY

3SBC1501A2