
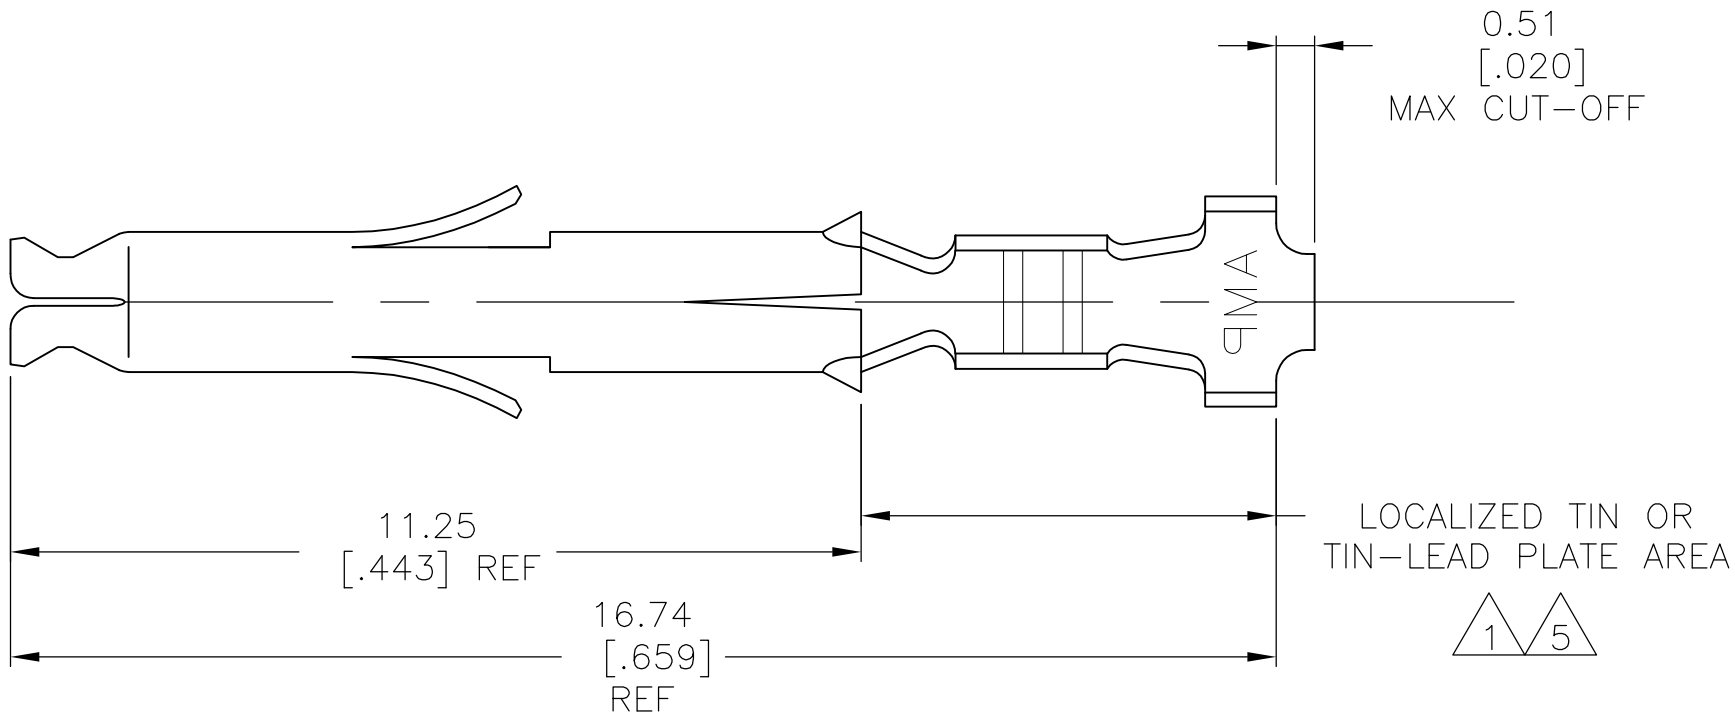


D

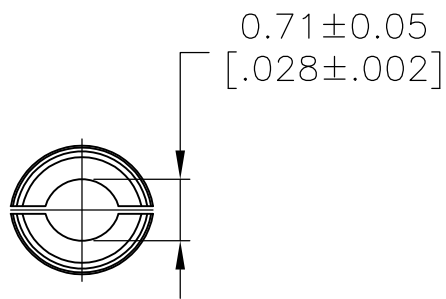

1

0.00076 [.000030] MIN GOLD IN LOCALIZED GOLD PLATE AREA AND 0.00254 [.000100] MIN BRIGHT TIN-LEAD IN LOCALIZED TIN-LEAD PLATE AREA OVER 0.00130 [.000050] MIN NICKEL.

2

WIRE RANGE: 0.12 – 0.4mm² (26–22 AWG).

3

INSULATION RANGE: 1.20–1.75[.047–.069] DIA.



4

DIMENSIONS IN BRACKETS ARE IN INCHES.

5


0.00076 [.000030] MIN GOLD IN LOCALIZED GOLD PLATE AREA AND 0.00254 [.000100] MIN BRIGHT TIN IN LOCALIZED TIN PLATE AREA OVER 0.00130 [.000050] MIN NICKEL.

C

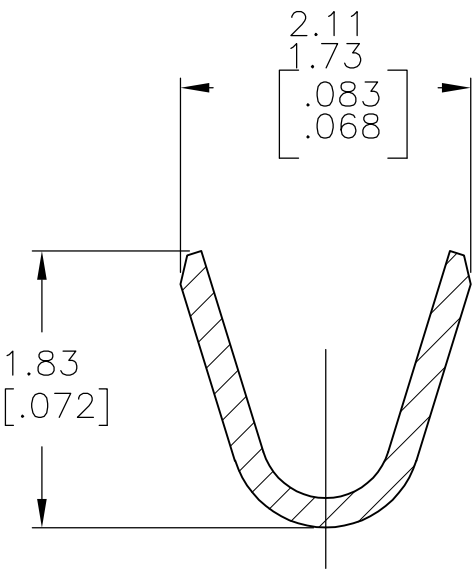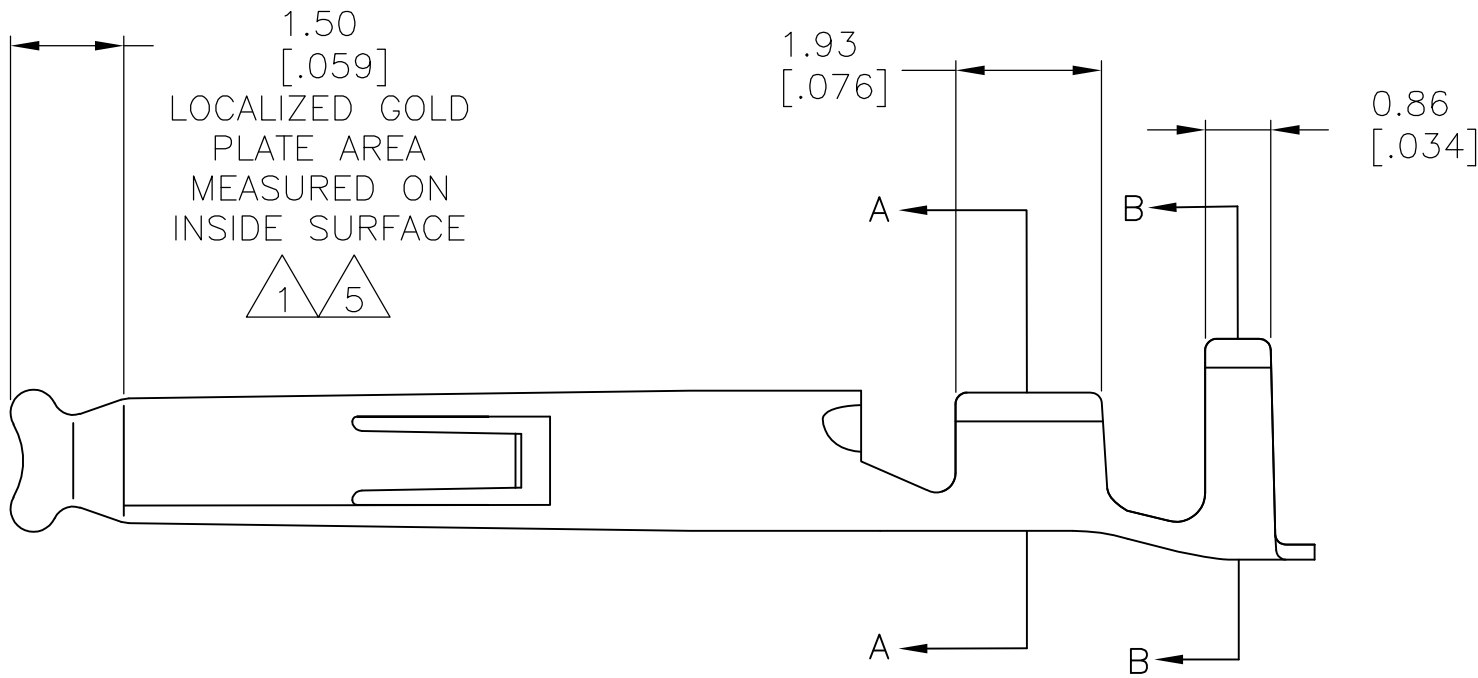

SECTION A–A
SCALE 20:1

B

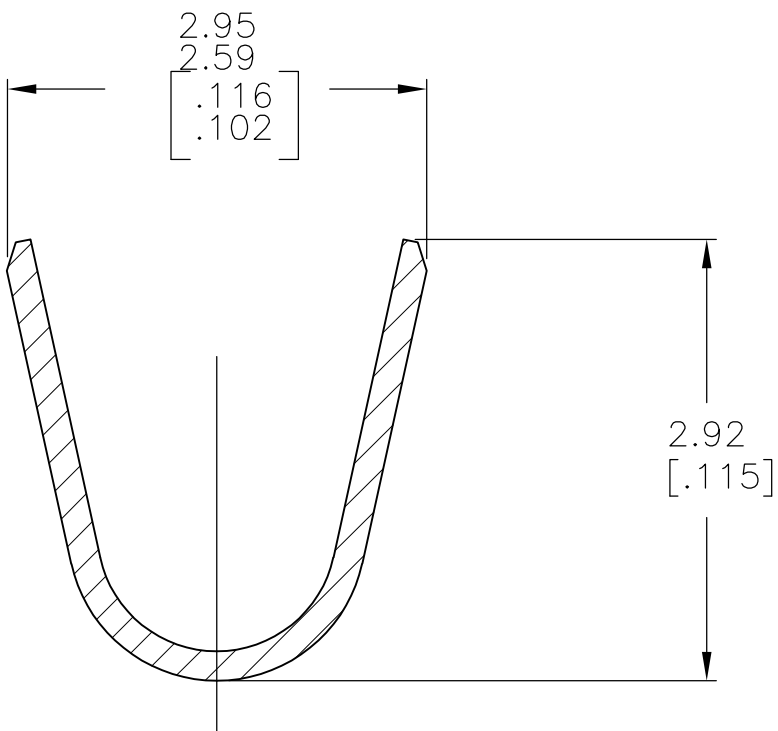

SECTION B–B
SCALE 20:1

5	0.20 [.008] PH BRZ	1–770902–1
5	0.20 [.008] BRASS	1–770902–0
1	0.20 [.008] PH BRZ	770902–6
PRE–TIN	0.20 [.008] PH BRZ	770902–4
1	0.20 [.008] BRASS	770902–3
PRE–TIN	0.20 [.008] BRASS	770902–1
FINISH	MATERIAL	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. HOOVER	16OCT02	TE Connectivity		
DIMENSIONS: mm [INCHES]		CHK C. JONES	16OCT02	NAME SOCKET, MINI UNIVERSAL MATE–N–LOK(TM)		
		APVD C. JONES	16OCT02	SIZE A2		
		PRODUCT SPEC				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC		CAGE CODE 00779		DRAWING NO C=770902
0 PLC ± – 1 PLC ± – 2 PLC ± – 3 PLC ± 0.15[.006] 4 PLC ± – ANGLES ± 1°		–		RESTRICTED TO –		
MATERIAL –		FINISH –		SCALE 10:1		SHEET 1 OF 1
		WEIGHT –		REV P1		
		CUSTOMER DRAWING				