





Tous droits strictement reserves. Reproduction ou communication a des tiers interdite sous quelque forme que ce soit sans autorisation ecrite du proprietaire. Propriete de c FCI. Droits de reproduction FCI.



All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor. Property of FCI. Copyright FCI.

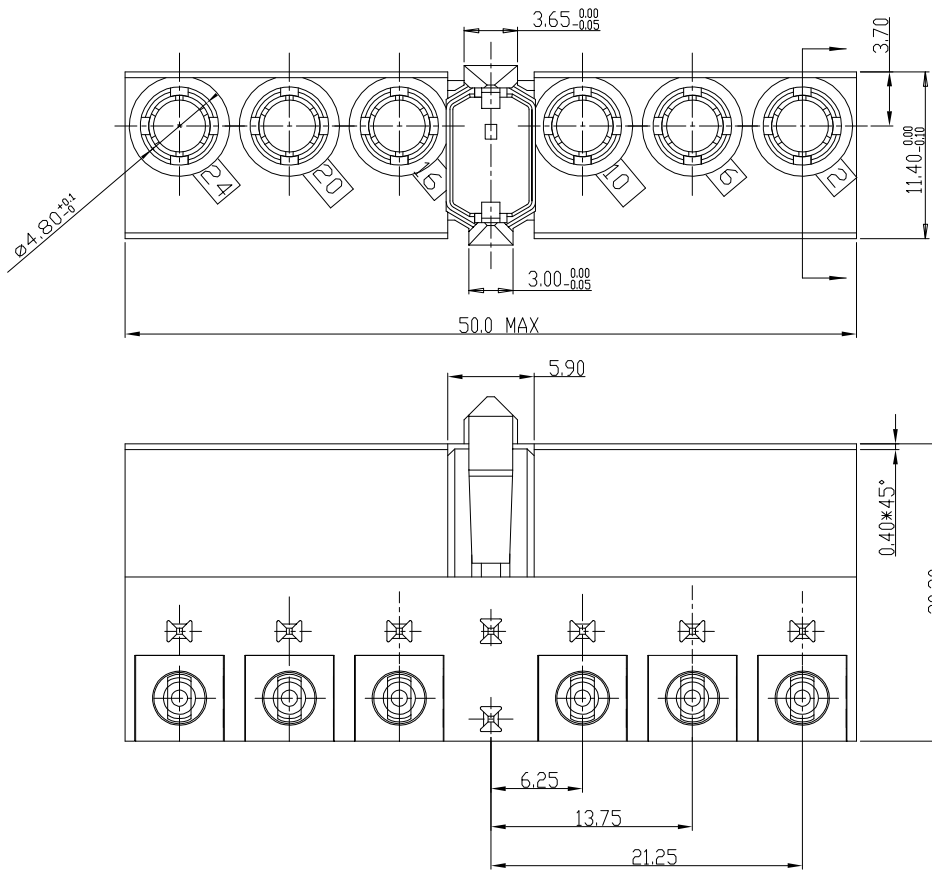

LAY-OUT
P.C.B.- HOLE

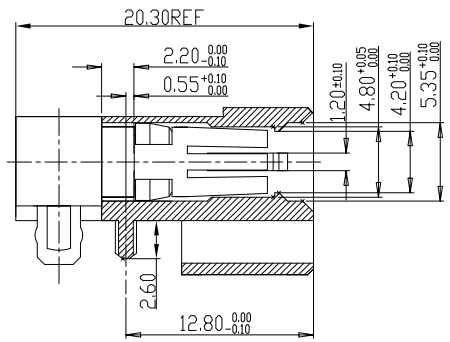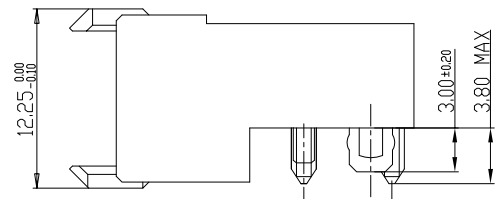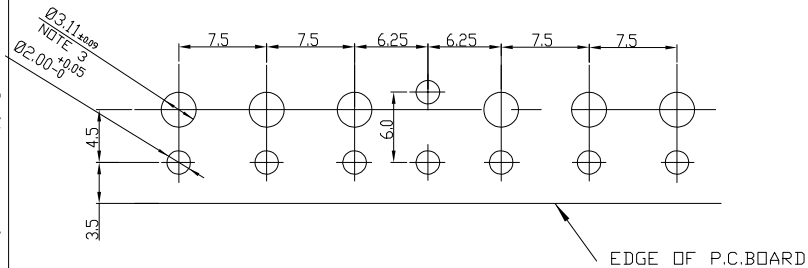

- NOTES: 1. THIS PRODUCT IS CSA APPROVED.
THIS PRODUCT IS UL RECOGNIZED.
2. FOR PRE-ASSEMBLED POWER PRESS-FIT CONTACT
DETAIL, SEE DRAW.NR.: BS,A ,201624,020
3. PCB HOLE DEFINITION:

Ø drilled hole	Cu plating	SnPb plating	Ø finished hole after reflow
3.19 - 3.25	25 um min.	5 um min.	3.02 - 3.20

4. PLATING: 1.5um Au over 2.0um Ni
5. ALLOWED PCB THICKNESS: MIN. 1.6 MM.
6. THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER
COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008

rev	ecn no	dr	date
A	CONVERSION REVISION 01	KN	16-02-04
B	DG05-0381	Kasor	10-10-05

Material				Spec ref	
Mat code		✓		tolerance	projection
Heattreat				1DEC±0.2 1DEC 2DEC ± 0.10 2DEC ANGLES±1°HÖCKEN	
Plating/Finish					
Dr	M.Fret	19-02-98			
Eng			Product family	MILLIPICS	size A4
Chr			Model Name		
Appr			Model Revision		ECN
					REL Level
	title			BS,C ,202444,001	Rev. B
Pro/E file	catalog no	HM2E30PH5000LF		CUSTOMER	sheet 1 of 1