Alle Rechte vorbehalten/ All rights reserved

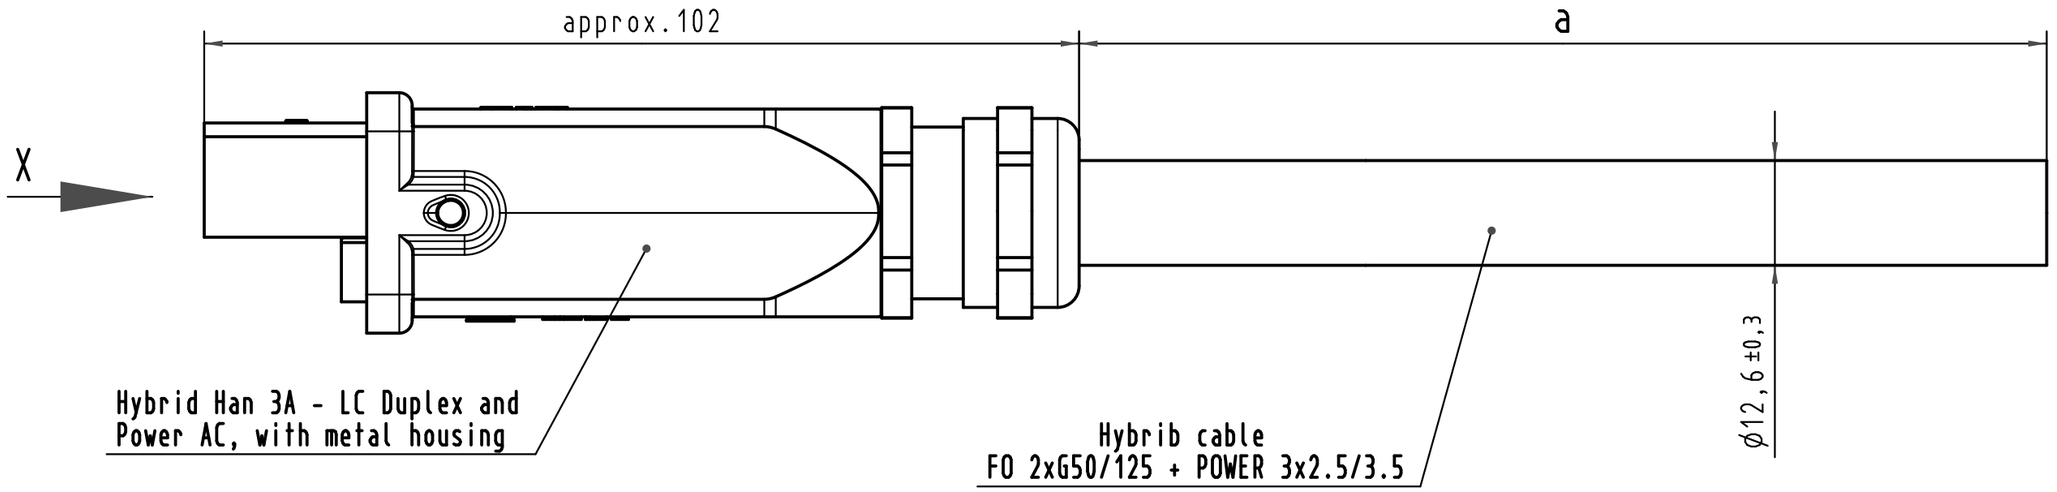

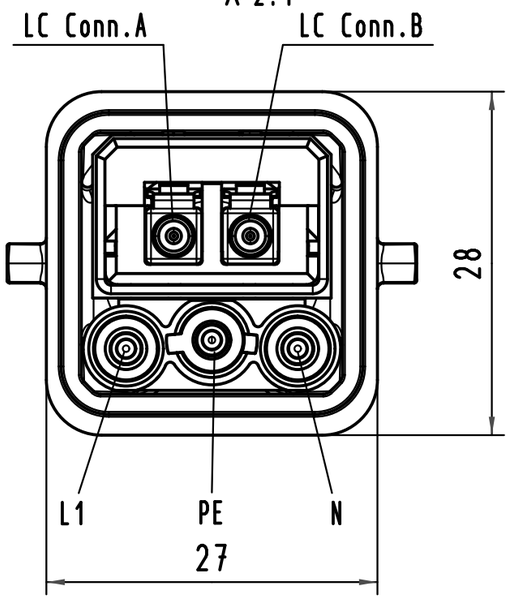

Loading-Plan

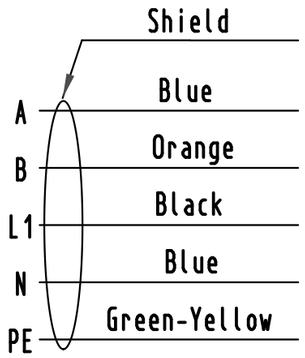

-Insertion loss must be tested 100%
-Return loss must be tested at least
by random samples

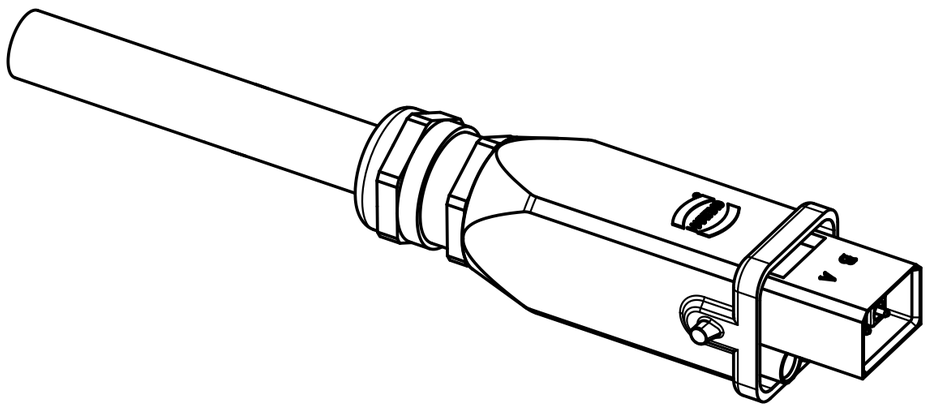

Cont No.	Type of cable	Part-No.	Dim. a
4	Hybrid cable 2xFO + 3x2.5/3.5	33 57 111 020 5001	20 (±0.20)m
3	Hybrid cable 2xFO + 3x2.5/3.5	33 57 111 010 5001	10 (±0.10)m
2	Hybrid cable 2xFO + 3x2.5/3.5	33 57 111 005 5001	5 (±0.05)m
1	Hybrid cable 2xFO + 3x2.5/3.5	33 57 111 001 5001	1 (±0.01)m

All Dimensions in mm
Original Size DIN A 3

Techn. Character.

Nicht tolerierte Maße/

	Dat.	Name
Detail.	06.02.09	MR
Insp.		
Stand.		

Maßstab/*Scale* /

Hybrid cable assembly,
FO 2xG50/125 + POWER 3x2.5/3.5,
1xHAN3A, LC duplex MM, 3xpower AC

S468A

Mod. Dat. Name

HARTING Electronics GmbH & Co. KG
D-32339 ESPELKAMP

TB 33 57 111 xxx 5001

Sub. Sub

Blatt/ *page*