
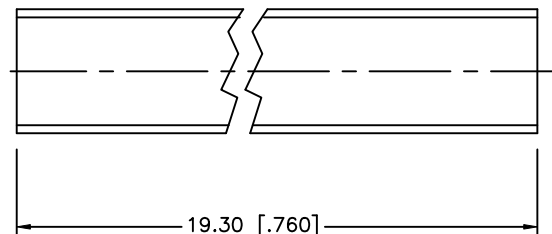
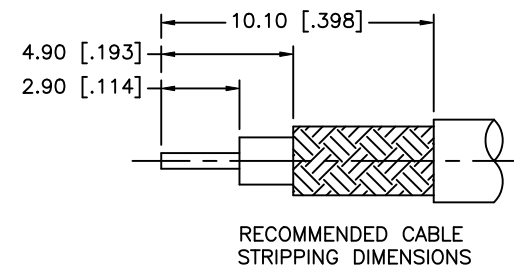
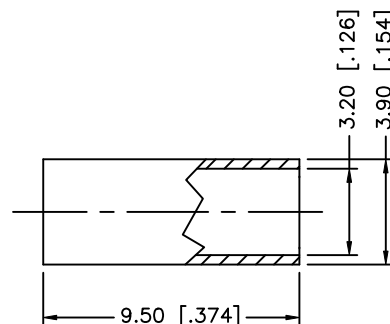
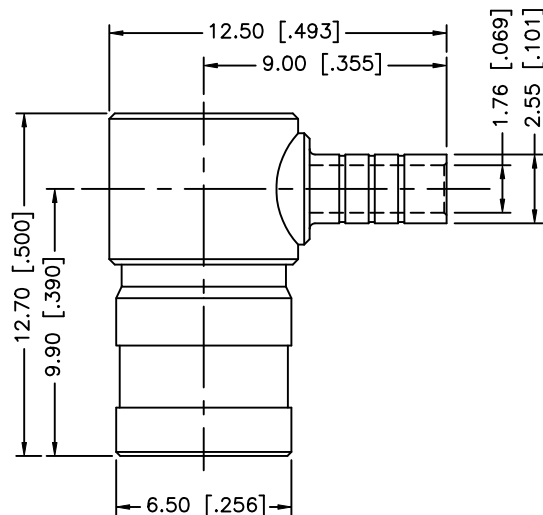


REV.	DATE	ECR NO.	DESCRIPTION
A	01/30/04	—	UPDATE PART DIMENSIONS / DRAWING FORMAT
B	05/08/07	—	REVISE BARREL, FERRULE DIMENSIONS
C	03/16/08	—	REVISE FERRULE AND RECOMMENDED CRIMP DIMENSIONS
D	11/13/08	—	REVISE FERRULE DIAMETERS TO 3.20 I.D. , 3.90 O.D.

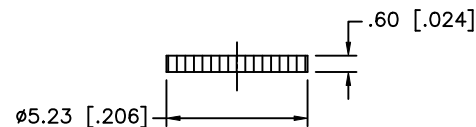

NOTE:

1. CRIMPED FERRULE HEX CRIMP SIZE .128"
2. CONTACT PIN TO SOLDER

				UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex			
8					DRAWN	G.R.S.	11/13/08					
7	HEAT SHRINK TUBE				CHECKED							
6	COVER	BRASS	NICKEL		1	ISSUED			PART DESCRIPTION SMB R/A CRIMP PLUG (FOR RG-174/U, 188A/U, 316/U CABLE)			
5	FERRULE	COPPER	NICKEL		1	SHEET	1 OF 1					
4	CONTACT PIN	BER. COPPER	GOLD		1							
3	INSULATOR	TEFLON	NATURAL		1			PART NO. 142193				
2	BODY	BRASS	NICKEL		1							
1	HOUSING	DIE CAST	NICKEL		1			DWG. NO. 142193.DWG				
	DESCRIPTION	MATERIAL	FINISH		QTY							
					CAD FILE		REV. D		SIZE A		SCALE NA	
					C:/142/142193.DWG							