

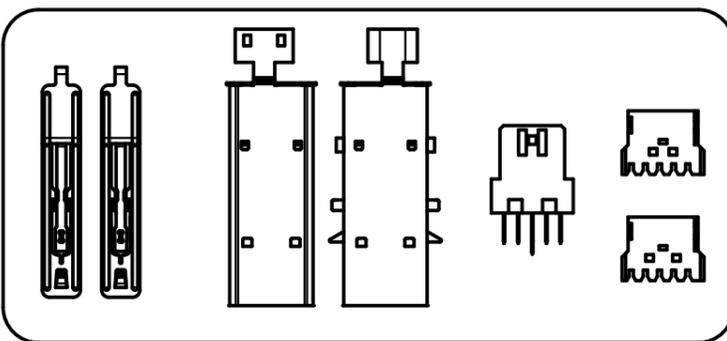





PACKAGING PIECE PARTS

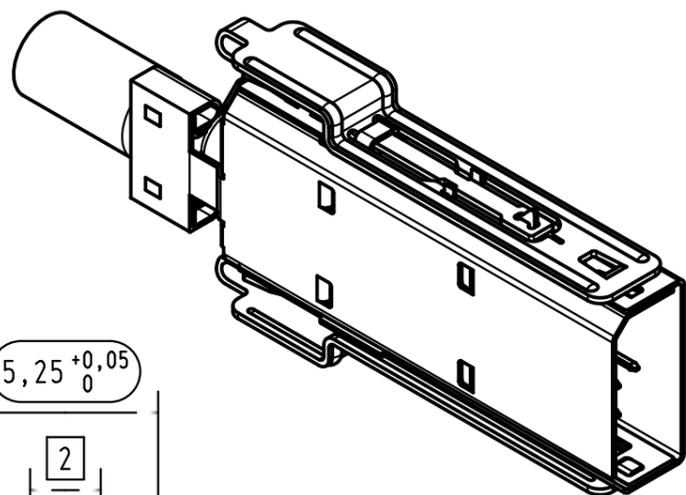

AFTER LATCHES OPENING

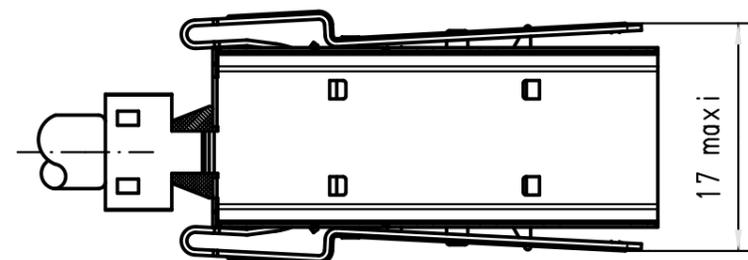

(39)

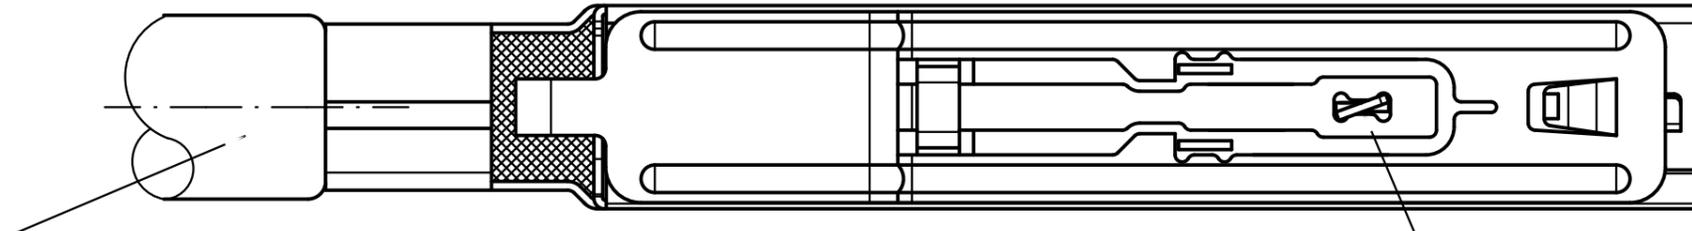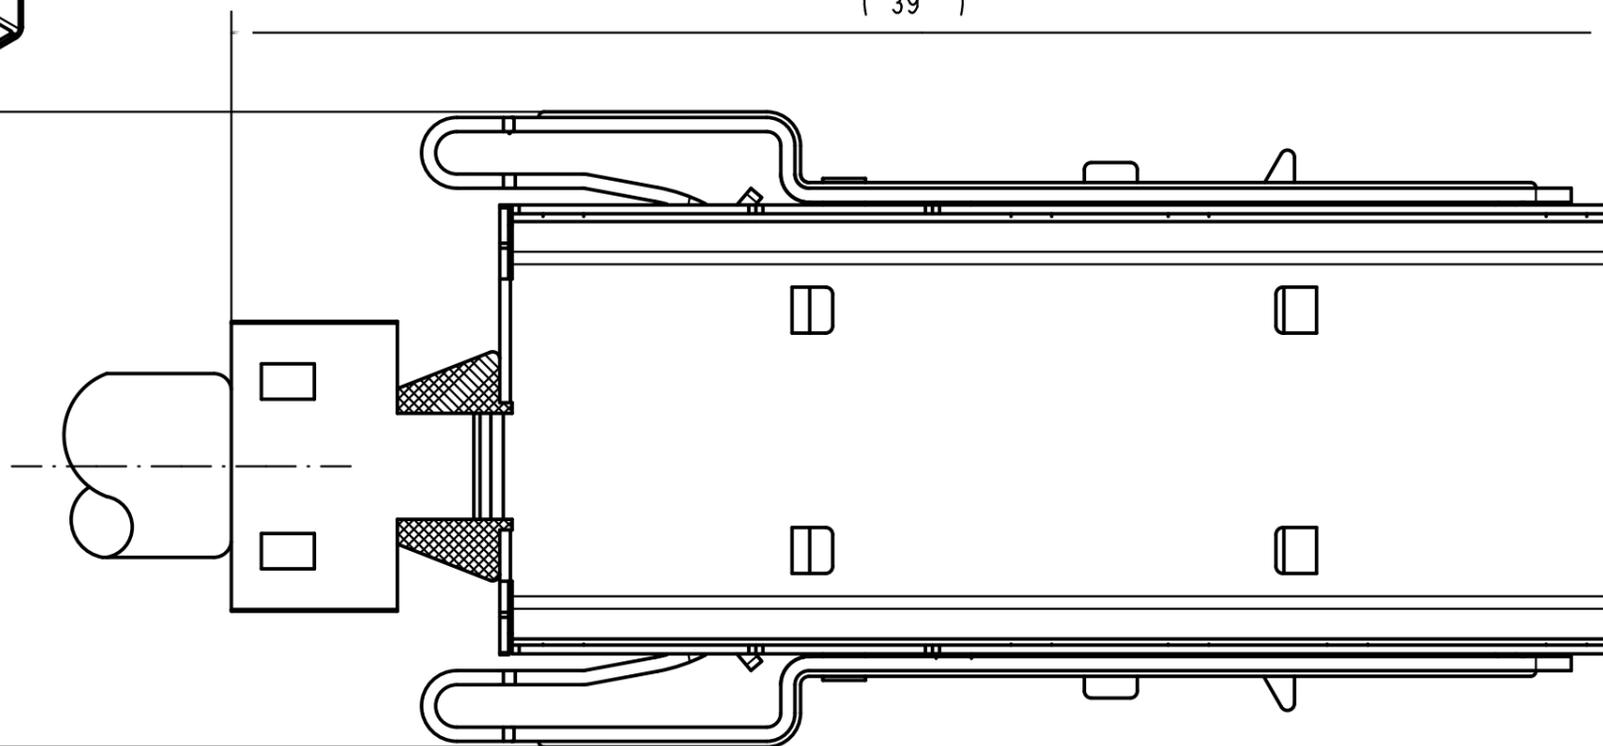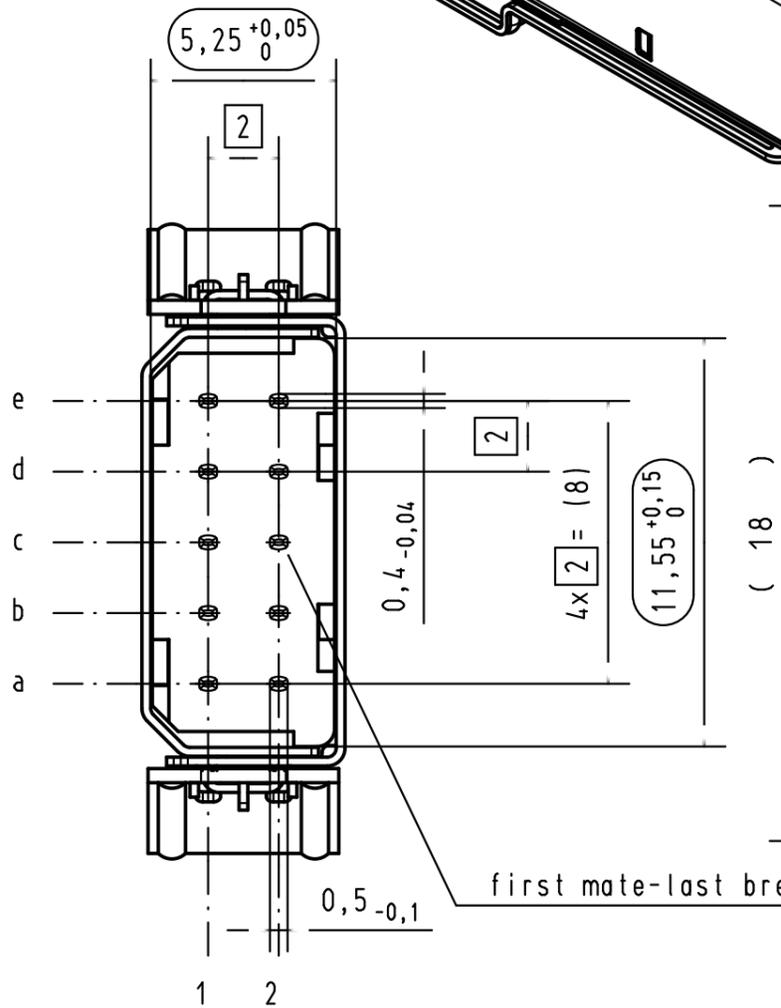


first mate-last break pin(2c)

recommended cable
 outer insulation diameter 5.33+/-0.25mm
 wire insulation diameter
 0.50 to 0.65mm for 1c and 2c contacts
 0.65 to 0.80mm for others
 wire conductor AWG28/7-AWG30/7-AWG30/1

twisting (from 20° to 45°) of front stop over central blade is recommended.

Alle Rechte vorbehalten/ All rights reserved

				Det.	Name	 har.link® DS-Link cable free male IDC connector with two locking levers	All Dim. in mm Orig. Size DIN A 3	Moßstab/ Scale 5:1
EC01859	07-MAY-10	JB	Insp.	05-JAN-01	JB			
33256	08-NOV-05	JB	Stand.					
27968	16-JAN-01	JB						
27966	05-JAN-01	JB						
Mod.	Det.	Name	HARTING EUROL F-95972 Paris				TB 27 11 161 8001	Blatt/ Page 1/1
							Sub.	