

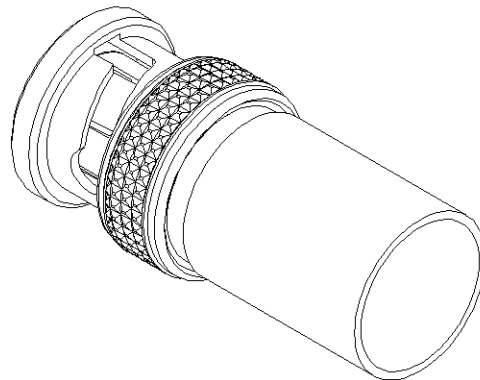



STRAIGHT PLUG CRIMP TYPE
CABLE 1.6/7.3 PACK. 100
R142.077.747

Series : BNC 75 HDTV

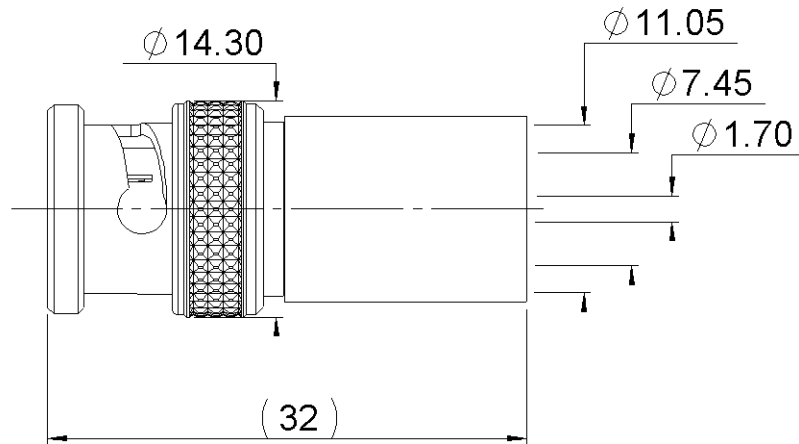

All dimensions are in mm.



COMPONENTS	MATERIALS	PLATING (μm)
BODY	BRASS	BBR 2
CENTER CONTACT	BRASS	NPGR
OUTER CONTACT	BRASS	NPGR
INSULATOR	PTFE	
GASKET	SILICONE RUBBER	
OTHERS PARTS	BRASS	BBR 2
-	-	-
-	-	-

Issue : 1003 B

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

RADIAL 

STRAIGHT PLUG CRIMP TYPE**CABLE 1.6/7.3 PACK. 100****R142.077.747**

Series : BNC 75 HDTV

PACKAGING

Standard	Unit	Other
100	'W' option	Contact us

ELECTRICAL CHARACTERISTICS

Impedance	75	Ω
Frequency	DC-6	GHz
VSWR	1.05 + 0,0350	x F(GHz) Maxi
Insertion loss	0.1	$\sqrt{F}$ (GHz) dB Maxi
RF leakage	- (AD)	- F(GHz)) dB Maxi
Voltage rating	500	Veff Maxi
Dielectric withstanding voltage	1500	Veff mini
Insulation resistance	5000	M Ω mini

MECHANICAL CHARACTERISTICS

Center contact retention	
Axial force – Mating end	10 N mini
Axial force – Opposite end	10 N mini
Torque	NA N.cm mini

Recommended torque	
Mating	NA N.cm
Panel nut	NA N.cm
Clamp nut	NA N.cm
A/F clamp nut	0,0000 mm

Mating life	1000 Cycles mini
Weight	11,9220 g

ENVIRONMENTAL

Operating temperature	-65/+165 °C
Hermetic seal	NA Atm.cm3/s
Panel leakage	NA

SPECIFICATION**CABLE ASSEMBLY**

Stripping	a	b	c	d	e	f
mm	4,00	10,8	18,0	0,00	14,0	0,00

Assembly instruction : **Crimp 02**

Recommended cable(s)

Characteristics indicated on this data sheet are those that can be achieved with the highest performance cable. Intrinsic limitations of the cable may diminish the performance of the assembly

Cable retention

- pull off	220 N mini
- torque	NA N.cm

TOOLING

Part Number	Description	Hexagon
.	.	.
R282.231.000	CRIMPING TOOL	2.54-10.54
R282.235.116	CRIMPING DIES	2.54-10.54
R282.293.000	CRIMPING TOOL M22520/5-01	
R282.223.000	CRIMPING TOOL	1.73
R282.235.011	CRIMPING DIES M22520/5-11	1.73

OTHER CHARACTERISTICS**Issue : 1003 B**

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

RADIAL 