
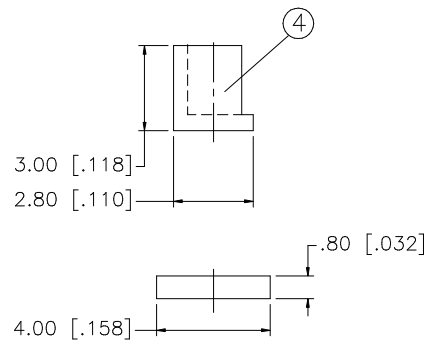


REV.	DATE	DESCRIPTION
NC	07/22/98	INITIAL RELEASE
A	10/31/05	UPDATE DRAWING FORMAT, ADD CRIMP NOTES

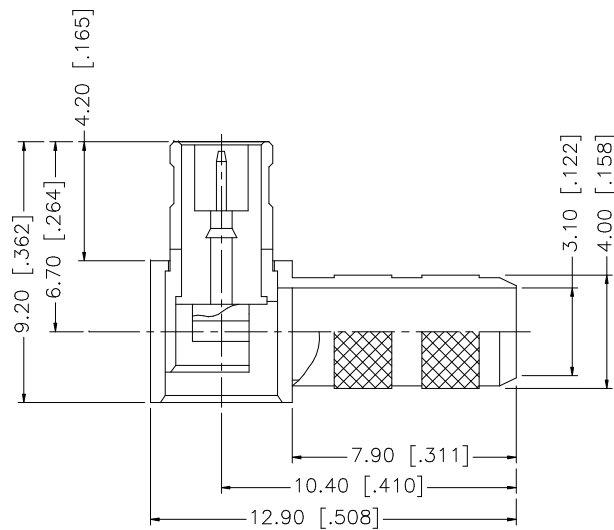

1. CRIMPED FERRULE
HEX CRIMP SIZE .213"
2. CONTACT PIN TO SOLDER

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex					
8						DRAWN	G.R.S.	10/31/05							
7						CHECKED									
6	FERRULE	COPPER	NICKEL	1						PART DESCRIPTION					
5	COVER	BRASS	NICKEL	1						MCX R/A CRIMP PLUG					
4	INSULATOR	DELRIIN	NATURAL	1						(FOR RG-55/U, 142/U, 223/U, 400/U CABLE)					
3	CONTACT PIN	BRASS	GOLD	1						PART NO.					
2	INSULATOR	TEFLON	NATURAL	1						252122					
1	BODY	BER. COPPER	NICKEL	1											
	DESCRIPTION	MATERIAL	FINISH	QTY					CAD FILE C:/252/252122.DWG		DWG. NO. 252122.DWG		REV. A	SIZE A	SCALE NA