




1. RECOMMENDED SPARE PARTS.
2. GREASE RAM, CAM, CAM FOLLOWER AND FEED ROD LIGHTLY.
3. LUBRICATE DAILY PER THE APPLICATOR INSTRUCTION SHEET SUPPLIED WITH THE APPLICATOR.
4. IF A WIRE DEPRESSOR IS REQUIRED ON THIS APPLICATOR REPLACE PART NUMBER 455888-8 WITH PART NUMBER 576266-4 AND 576265-5.

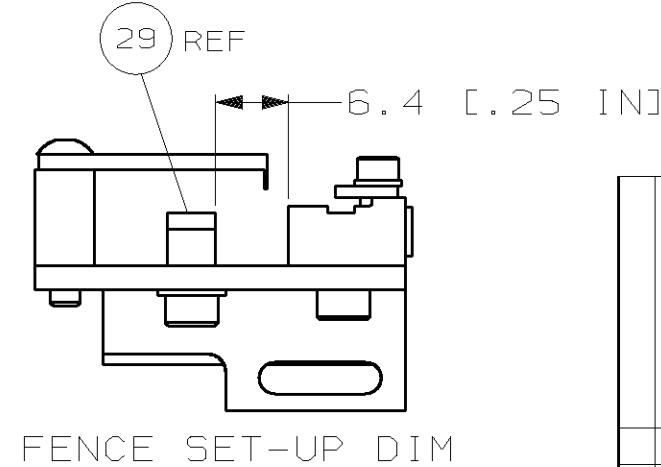

QTY REQD PER ASSY				PARTS LIST			
CMR LL APP	JUL03 0CT00 DATE	DIMENSIONS: mm (INCHES) DO NOT SCALE PRINT.		MATL	HT TR	FIN	
		TOLERANCES UNLESS OTHERWISE SPECIFIED:		DR	21 AUG00	21 AUG00	
		1 PLC DEC ± 0.5 [0.02 IN]	L: LOFHOUSE	F: BACKHURST			
		2 PLC DEC $\pm$	CHK	REL	09-10-2000		
		3 PLC DEC $\pm$		L: LOFHOUSE			
ANGLES $\pm$ SURF TEXTURE:		NAME		MACHINE REF			
REMOVE BURRS, BREAK SHARP EDGES RO. 38 MAX		SCALE		HD-I APPL			
CASE CODE 00779		D		DWG NO			
00779		1426083		SHEET			
				1 OF 1			
				REV			
				B			
				RESTRICTED TO			
				—			