

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0765003807

Status:

Active

Overview:


Impact™ Backplane Connector and Cable Assembly System

Description:

Impact™ 100 Ohm 4 Pair RAM Right Angle Header, Left Guided, Open Endwall, 8 Columns, 96 Circuits, Pin Length 4.90mm, Plated Through Hole Dimension 0.39mm, Lead-Free

Documents:	
3D Model	Application Specification AS-76060-994 (PDF)
Drawing (PDF)	Application Specification AS-76060-9999 (PDF)
Product Specification PS-76060-999 (PDF)	Packaging Specification PK-70873-041 (PDF)
Application Specification AS-76060-990 (PDF)	RoHS Certificate of Compliance (PDF)

Agency Certification	
UL	E29179
General	
Product Family	Backplane Connectors
Series	76500
Application	Coplanar
Application Tooling Documents	TM-622018799
Component Type	PCB Header
Overview	Impact™ Backplane Connector and Cable Assembly System
Product Name	Impact™
UPC	883906873653
Physical	
Circuits (Loaded)	96
Circuits (maximum)	96
Color - Resin	Black
Durability (mating cycles max)	200
First Mate / Last Break	No
Flammability	94V-0
Guide to Mating Part	Yes
Keying to Mating Part	None
Material - Metal	High Performance Alloy (HPA)
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	15.478/g
Number of Columns	8
Number of Pairs	4
Number of Rows	12
Orientation	Right Angle
PC Tail Length	1.20mm
PCB Locator	No
PCB Retention	Yes
PCB Thickness - Recommended	1.00mm
Packaging Type	Tray
Pitch - Mating Interface	1.90mm
Pitch - Termination Interface	1.90mm
Plating min - Mating	0.762µm
Polarized to PCB	Yes
Stackable	No
Temperature Range - Operating	-55°C to +85°C
Termination Interface: Style	Through Hole - Compliant Pin

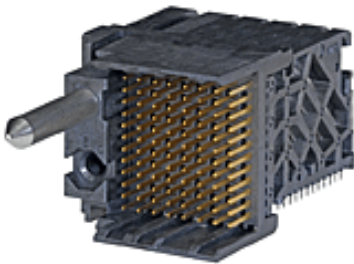

Series image - Reference only

EU ELV	
Not Relevant	
EU RoHS	China RoHS
Compliant	
REACH SVHC	
Not Contained Per	
-ED/79/2015 (17	
December 2015)	
Halogen-Free	
Status	
Low-Halogen	
Need more information on product	
environmental compliance?	
Email productcompliance@molex.com	
Please visit the Contact Us section for any	
non-product compliance questions.	
China ROHS	Green Image
ELV	Not Relevant

Search Parts in this Series	
76500 Series	
Mates With	
76160 Impact™ 100 Ohm Daughtercard	
Application Tooling FAQ	
Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.	
Global	
Description	Product #
Press-In Tool for	0622018677
Daughter Card	
Module	
Impact™ Right Angle	0622024350
Module Removal	
Tool (RAM)	

Electrical

Current - Maximum per Contact	0.75A
Data Rate	25.0 Gbps
Impedance	100#
Shield Type	N/A
Shielded	No
Voltage - Maximum	30V AC (RMS)/DC

Solder Process Data

Lead-freeProcess Capability	N/A
-----------------------------	-----

Material Info

Reference - Drawing Numbers

Application Specification	AS-76060-990, AS-76060-994, AS-76060-9999
Electrical Model Document	EE-76500-002
Packaging Specification	PK-70873-041
Product Specification	PS-76060-999
S-Parameter Model	SP-76500-002
Sales Drawing	SD-76500-002
Symbol/Footprint Data	SYM-76500-3807

This document was generated on 06/09/2016

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION