


REV.	ECO NO.	DESCRIPTION	RELEASED BY	DATE
B	6042	CHANGE CONNECTOR	JSK	5/2/08

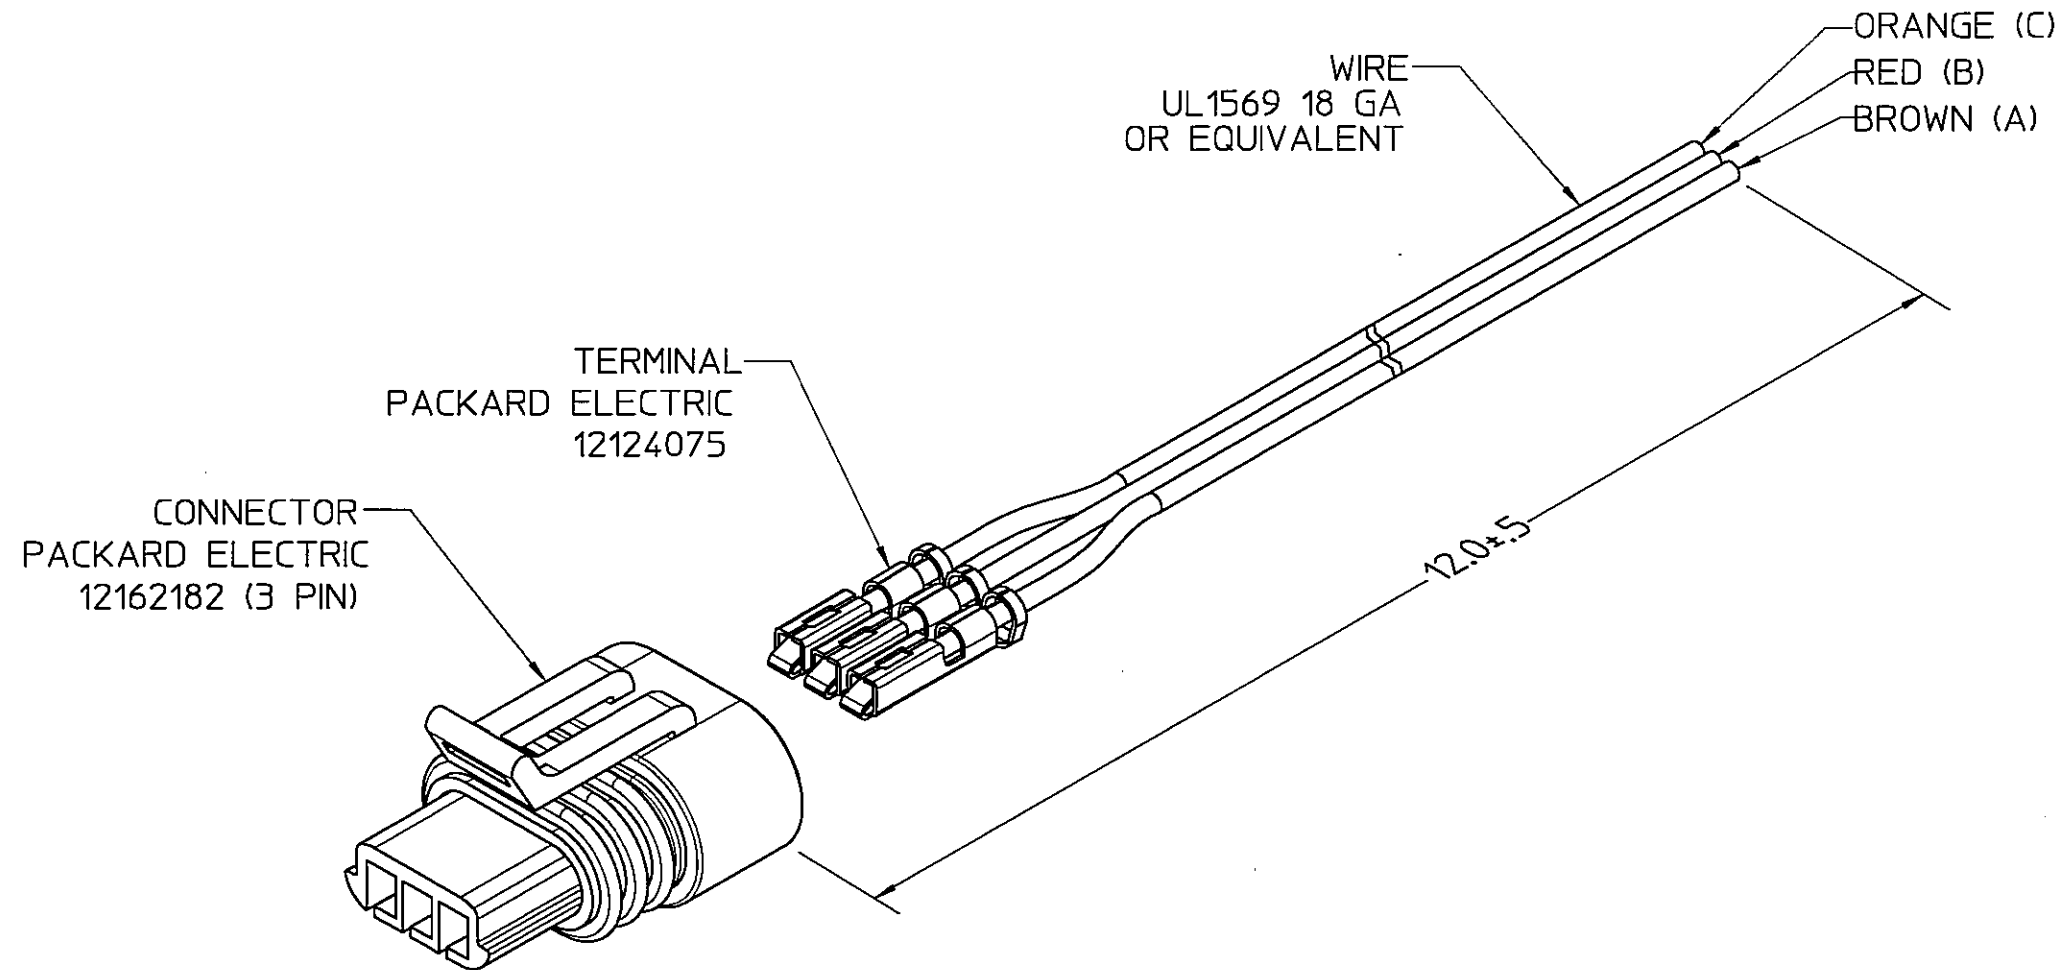

UNCONTROLLED DOCUMENT

PURCHASED ASSY

1. EXPLODED VIEW SHOWN FOR CLARITY.

- C** IDENTIFIES FEATURES THAT ARE DESIGNATED SIGNIFICANT BY CUSTOMER.
- SIG** IDENTIFIES FEATURES THAT SIGNIFICANTLY AFFECT FIT OR FUNCTION AND WHICH REQUIRE ADDITIONAL CONTROL PER THE DUNCAN ELECTRONICS QUALITY SYSTEM DOCUMENTATION.
- SPC** IDENTIFIES FEATURES THAT SHALL BE MONITORED FOR PROCESS CONTROL AND FOR WHICH STATISTICAL DATA SHALL BE SUBMITTED PER THE DUNCAN ELECTRONICS QUALITY SYSTEM DOCUMENTATION.

NOTES: UNLESS OTHERWISE SPECIFIED

This document and all information contained herein are proprietary and are the sole property of BEI Duncan Electronics Division and shall not be reproduced or disclosed without written authorization. Use of this information for the purpose of manufacture does not constitute the release of the proprietary rights thereto.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES PER ASME Y14.5M		THIRD ANGLE PROJECTION		BEI DUNCAN ELECTRONICS DIVISION BEI TECHNOLOGIES, INC. DUNCAN ELECTRONICS DIVISION, 170 TECHNOLOGY DRIVE, IRVINE, CA 92618-2401	
TOLERANCES ARE:		APPROVALS	DATE	TITLE	
DECIMALS	ANGLES			CABLE ASSY MODEL 9850	
.XX	±.1°	DRAWN	29/APR/08	SIZE	CAGE CODE
.XXX	±.005	CHECKED	4/30/08	B	11534
.XXXX	±.0005	DESIGN/ENG.	4/30/08	DWG NO.	1-172
DIAMETERS SHOWN ON COMMON CENTERS $\pm .005$		ENG. APPROVAL	4/30/08	SCALE	2X
FEATURES SHOWN ON COMMON CENTERS $\pm .005$					
INSIDE/OUTSIDE RADIUS .005 MAX.					
DO NOT SCALE DRAWING					
				REV.	B
				PAGE 1 OF 1	