

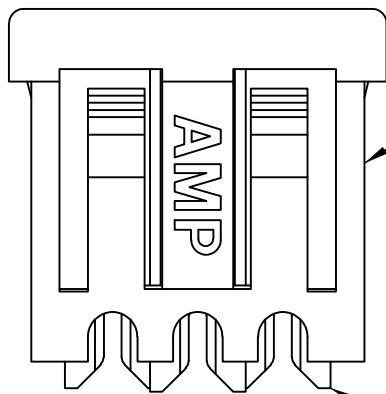



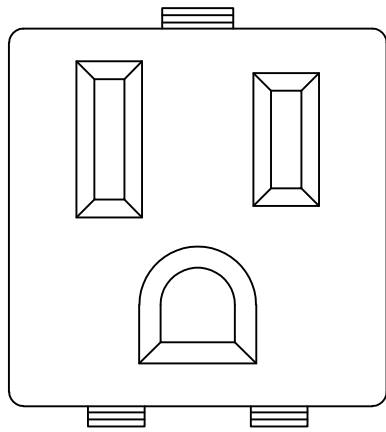


HOUSING

CONTACT
3 PLC

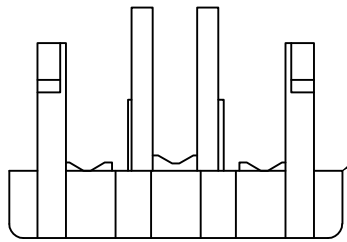


COVER




24.59±0.25
[.968±.010]

RECOMMENDED PANEL CUTOUT

- CONTACTS TO ACCEPT 14 AWG AND 12 AWG SOLID COPPER WIRE OR 14 AWG STRANDED WIRE WHEN USED WITH AMP 205 SERIES FASTON™ TAB.
- COVER PACKAGED UNASSEMBLED.
- SNAP IN FEATURE ACCOMODATES 0.76-1.78 [.030-.070] PANEL THICKNESS ONLY.
- ALL HOUSINGS AND COVERS ARE UL 94V-2 RATED UNLESS OTHERWISE SPECIFIED.
- UL 94V-0 RATED HOUSING AND COVER.

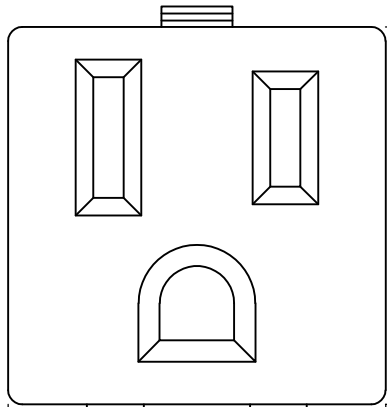


26.92±0.38
[1.060±.015]

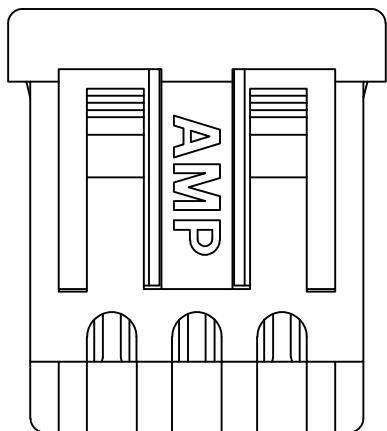

24.26 MAX
[.955]

5.21 MAX
[.205]


CHARACTERS 402400022
MOLDED THIS SIDE
208979-1 ONLY

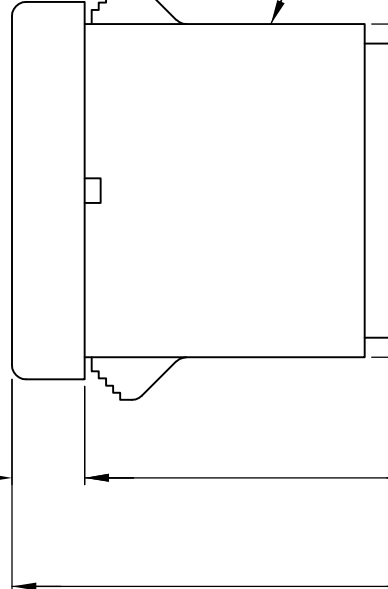

24.33 MAX
[.958]

25.15 MAX
[.990]

30.35 REF
[1.195]

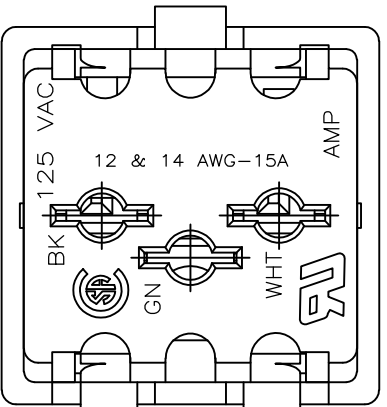

ASSEMBLED VIEW

OBSOLETE	—	1-208979-5
	PUTTY WHITE	1-208979-4
OBSOLETE	BLACK	1-208979-3
	ORANGE	1-208979-2
	GRAY	1-208979-1
	GRAY	1-208979-0
OBSOLETE	CREAM	208979-9
OBSOLETE	WHITE	208979-7
	ALMOND	208979-4
	BLACK	208979-2
OBSOLETE	BLACK	208979-1
	HOUSING COLOR	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B.MOYER 5-1-91	TE Connectivity		
DIMENSIONS: mm[INCHES]		CHK R STONE 5-7-91			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD D L ROCKER 5-7-91	NAME		
0 PLC ± -		PRODUCT SPEC	RECEPTACLE KIT, UNASSEMBLED, WITH COVER, CONVENIENCE OUTLET		
1 PLC ± -		APPLICATION SPEC			
2 PLC ± -		—	SIZE CAGE CODE DRAWING NO		
3 PLC ± -		—	A2 00779 C-208979		
4 PLC ± -		—	RESTRICTED TO		
ANGLES ± ± -		WEIGHT	—		
FINISH		—	—		
MATERIAL		CUSTOMER DRAWING	—		
HOUSING: NYLON, SEE TABLE		—	—		
COVER: NYLON BLACK		—	—		
CONTACTS: BRASS		—	—		