

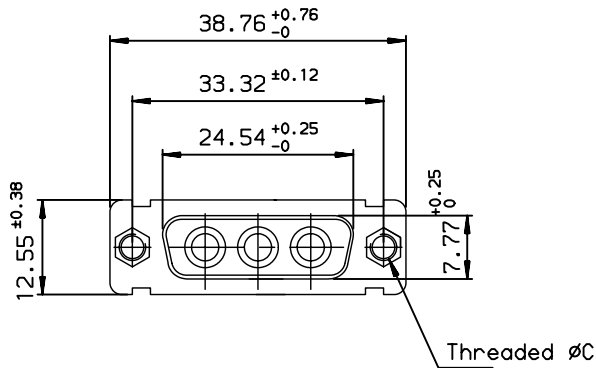


LAYOUT DIMENSIONS (after plating)
CONNECTOR SIDE VIEW

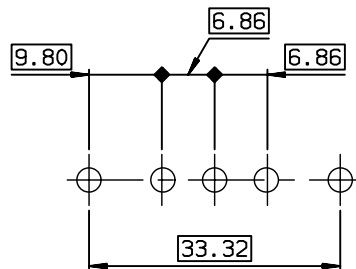

DETAIL OF PRESS FIT
Scale: 3

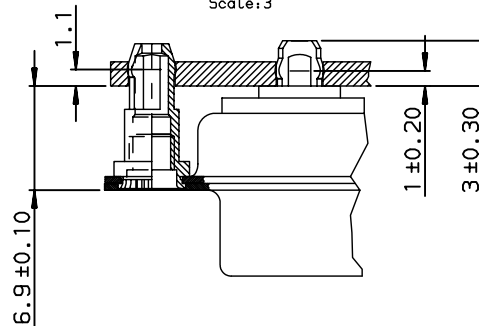

DA03W3S93C8G40	UNC 4.40
DA03W3S93C7G40	UNC 4.40
DA03W3S93C6G40	UNC 4.40
DA03W3S93C5G40	UNC 4.40
DAL3W3S93C8G40	M3
DAL3W3S93C7G40	M3
DAL3W3S93C6G40	M3
DAL3W3S93C5G40	M3
TIN-LEAD P/N	Threaded A

GENERAL CHARACTERISTICS : SEE DRAWING C01-8639-0002

European Views

www.fciconnect.com			surface ISO 1302	tolerance std ISO 406 ISO 1101	projection A3	mm
			TOLERANCES UNLESS OTHERWISE SPECIFIED			
Dr	JOUBERT	1998/03/16	ANGULAR 0.XX' ± 2'	0.X	± 0.1	size A3
Eng	PESSON	1998/03/16		0.XX	± 0.1	Scale 1.5
Chr	LEGARE	1998/03/16		0.XXX	± 0.1	ECN LS07-0070
Appr	LEGARE	1998/03/16	Product family			Spec ref -
			D-SUB			
			SOCKET CONNECTOR 3W3			Rev. E
			STRA POWER P-F			
			catalog no			
			CUSTOMER			sheet 1 of 1

rev	ecn no	dr	date
B	-	SBA	2003/11/18
C	LS05-0056	MPE	2005/06/20
D	LS06-0097	LGO	2006/07/29
E	LS07-0070	MPE	2007/03/06
-	-	-	-
-	-	-	-
-	-	-	-