


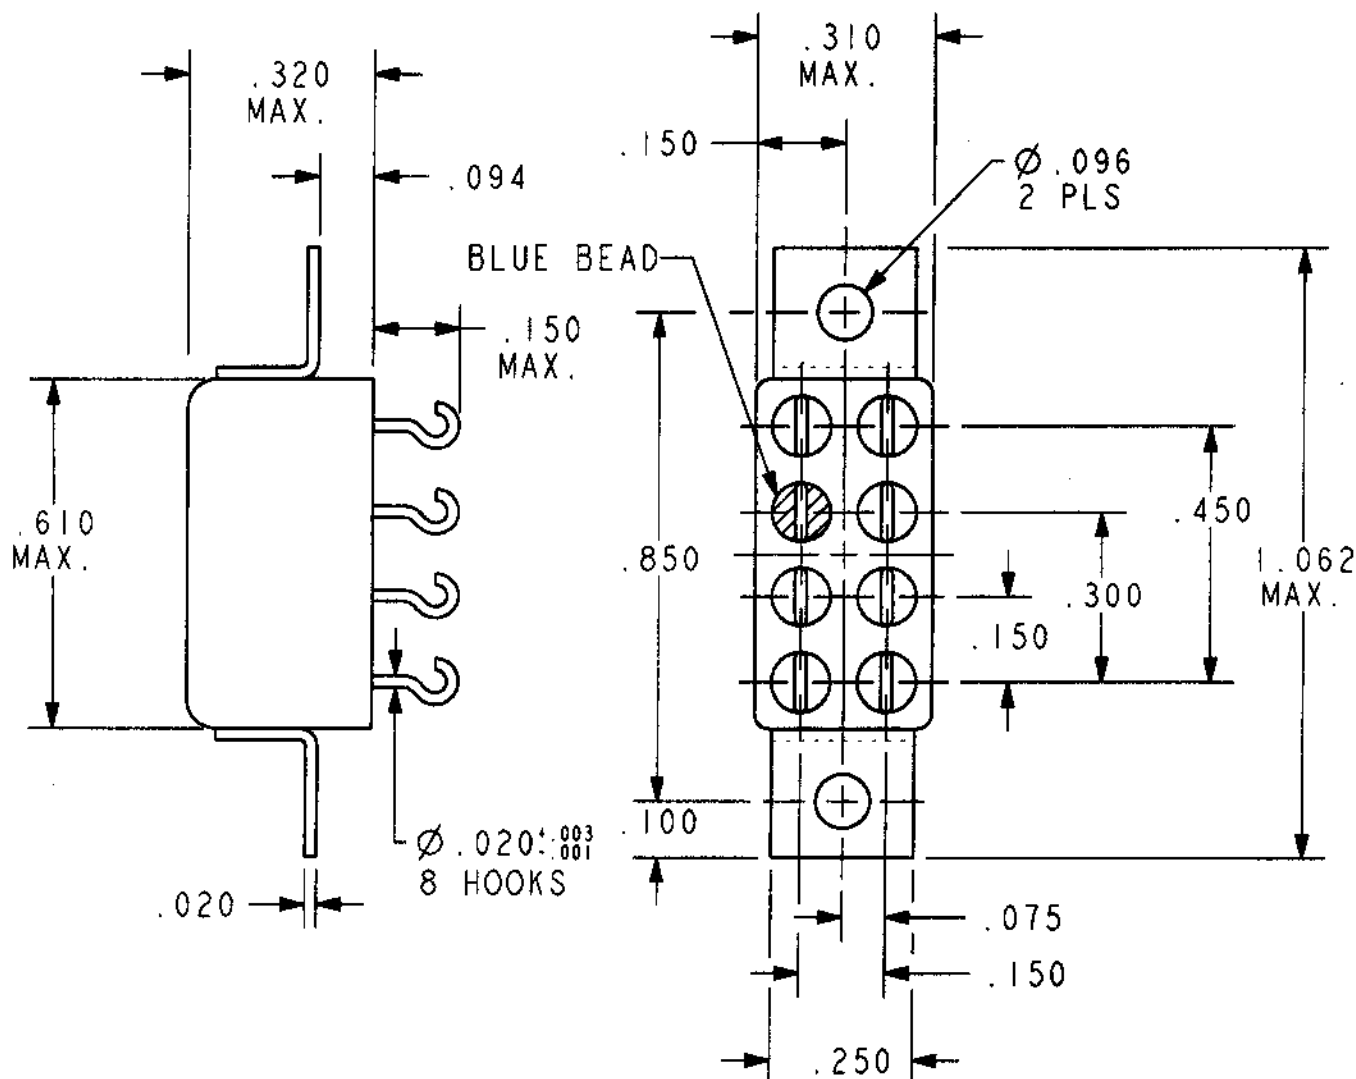

REV. 0

DCO 142960

TOL $\pm .010$ UNLESS OTHERWISE SPECIFIED

COIL: @ 25°C

RESISTANCE 1350 OHMS $\pm 10\%$

NOMINAL VOLTAGE 26.5 VDC

MUST OPERATE 13.5 VDC

MUST RELEASE 8.1 VDC MAX., 1.5 VDC MIN.

ENVIRONMENT:

VIBRATION 10 CPS TO 3000 CPS @ 30 g's

SHOCK 75 g's 6 MS. DURATION


TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE 4 MS MAX.

RELEASE 6 MS MAX.

CONTACT BOUNCE 1.5 MS MAX.

CUSTOMER DATA SHEET

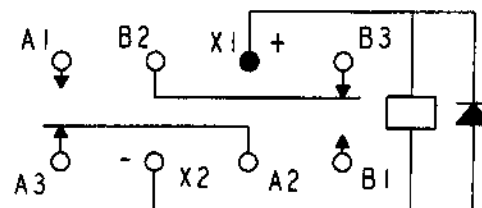

TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO
2 AMPS 28 VDC RESISTIVE
50,000 OPERATIONS

DR. B.D. 5/31/01 CK. TLG 5-31-01

CII Technologies
advanced control electronic solutions

CUST. QPL
CUST. NO. M39016/37-026L REV.

"3SBC" RELAY

3SBC1626A2