

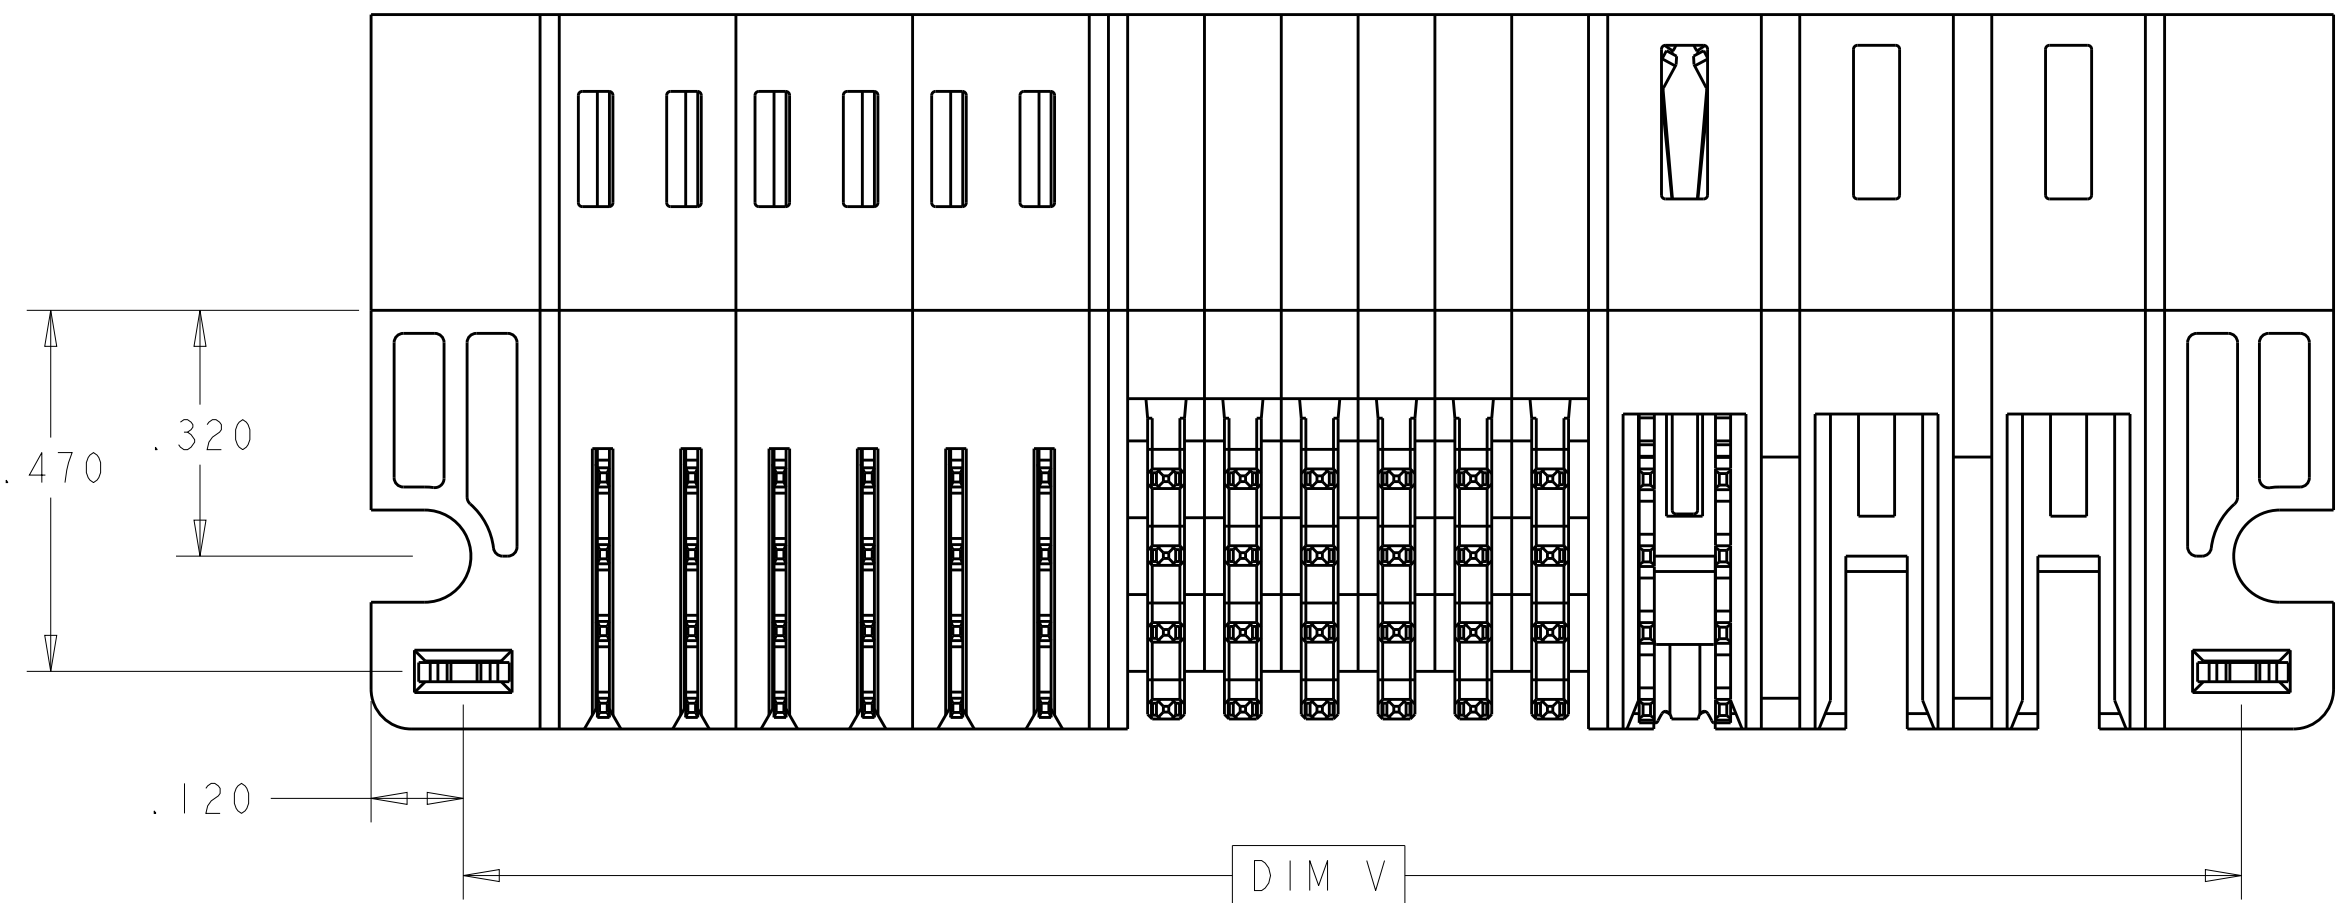
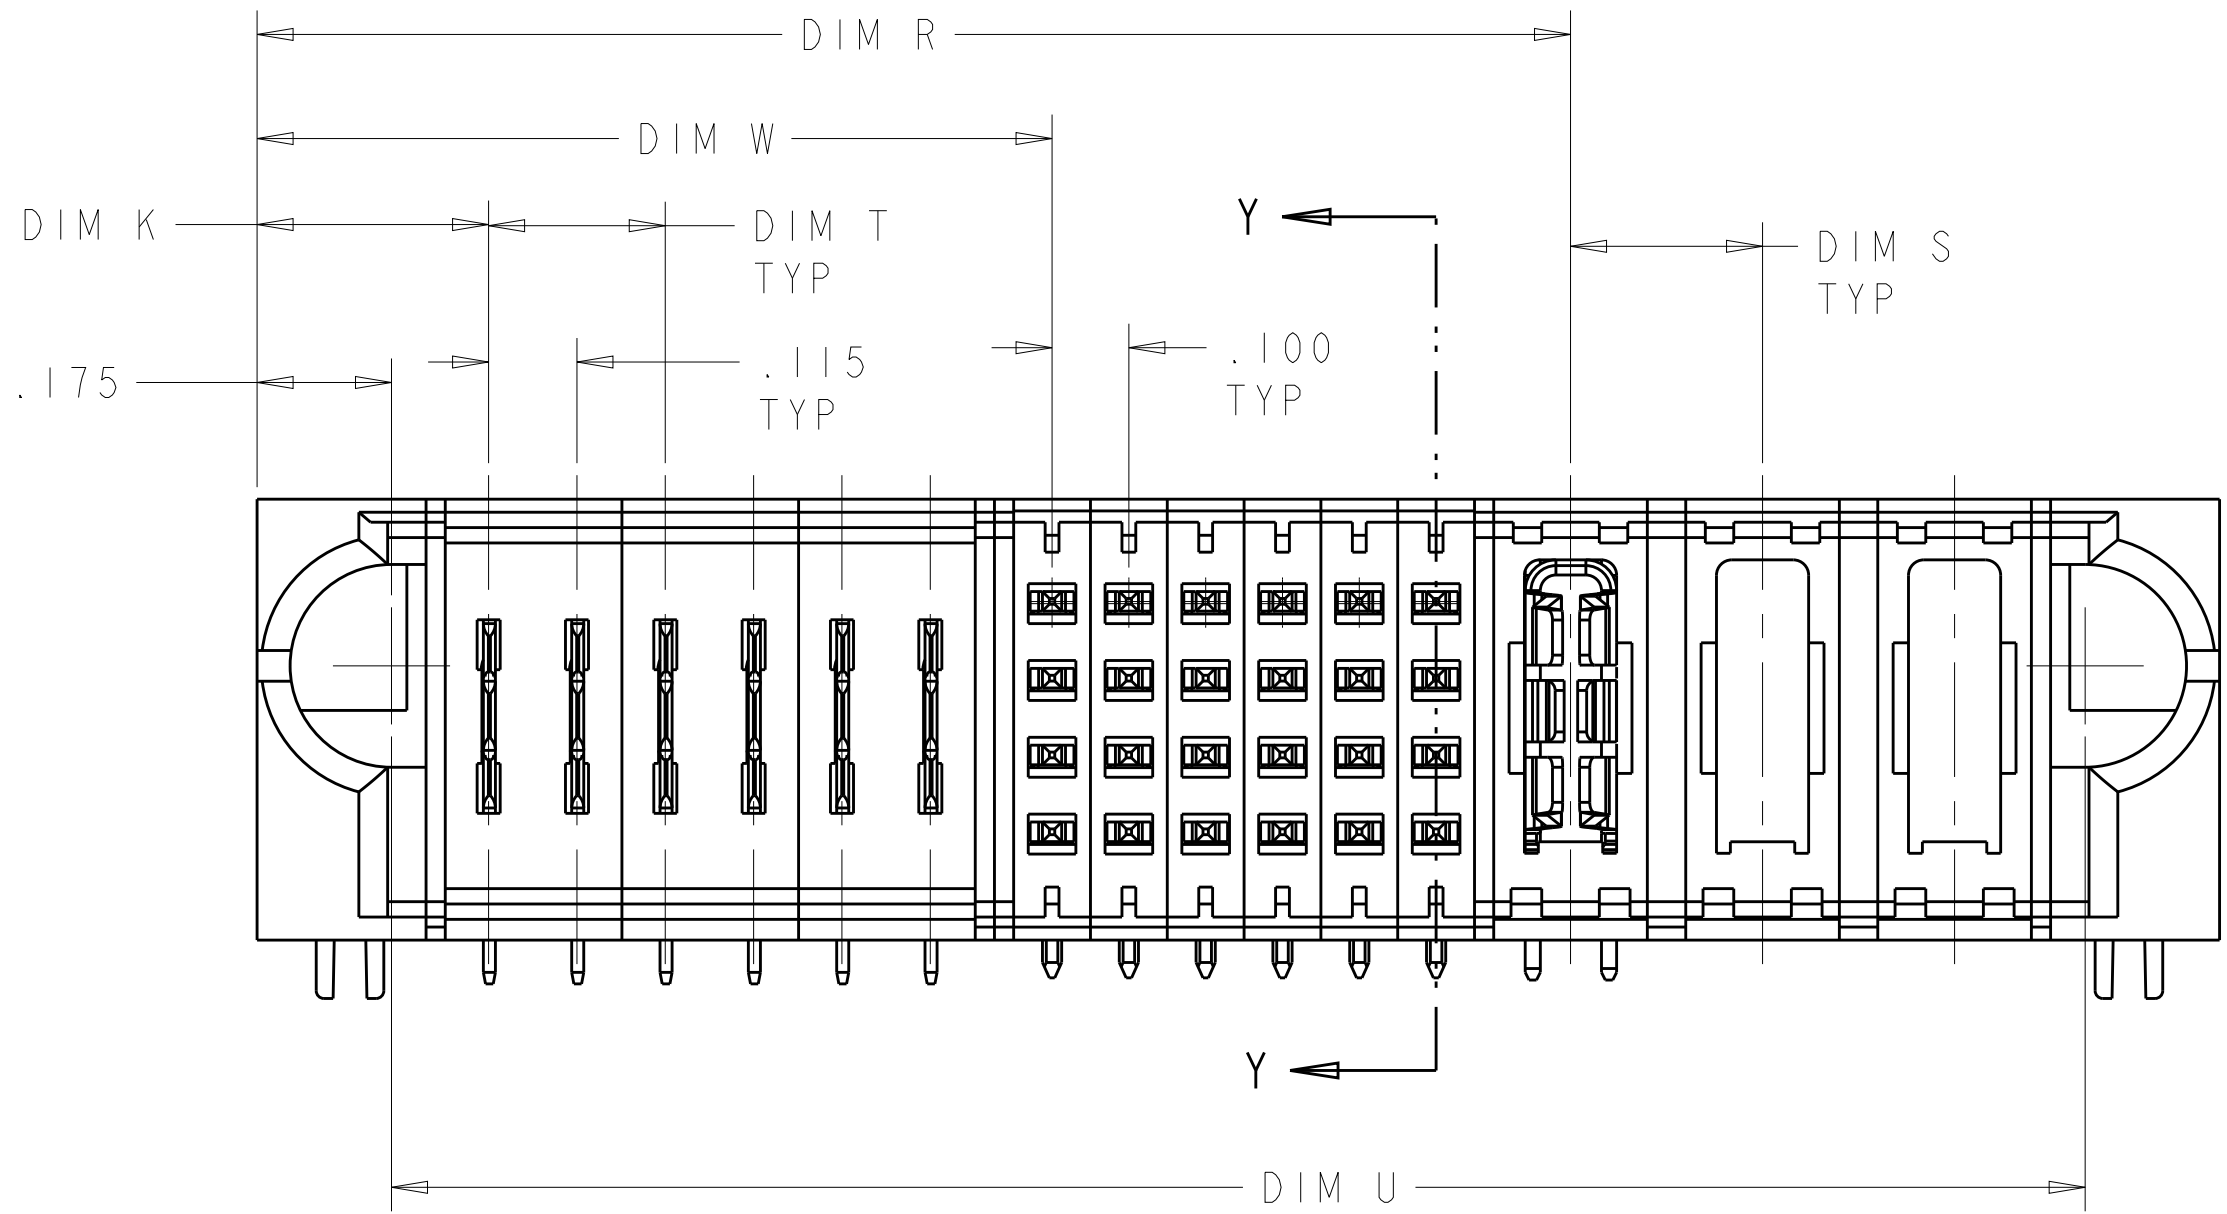
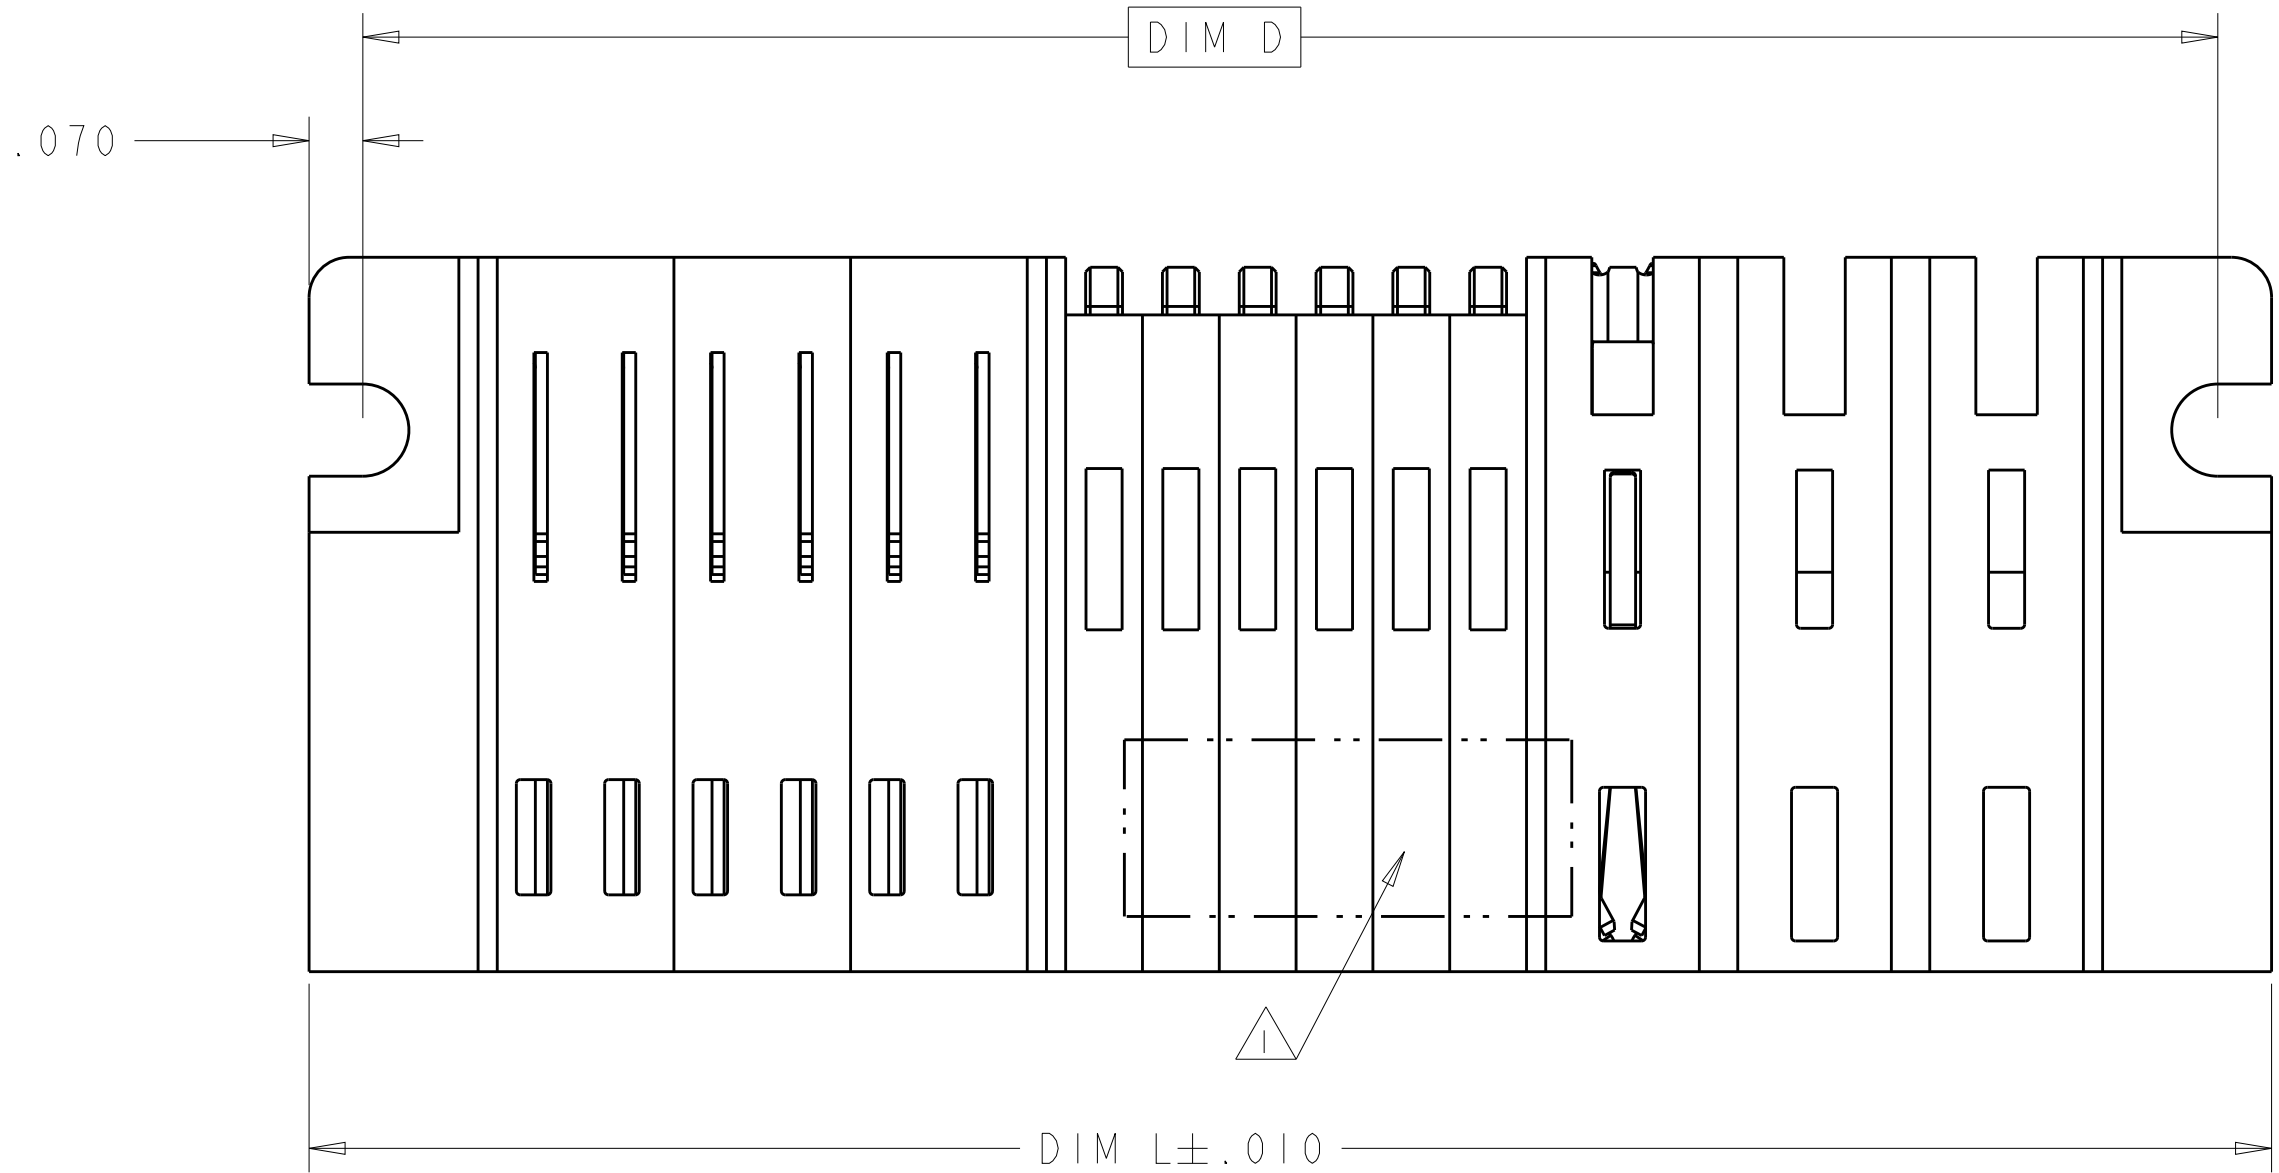


LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			R9	REVISED 8-1	05NOV2014	CZ	SZ
			S	ADD NEW DASH NUMBER 8-2	07FEB2015	CZ	SZ
			S2	REVISED 8-2 CUSTOMER	09MAR2015	CZ	SZ

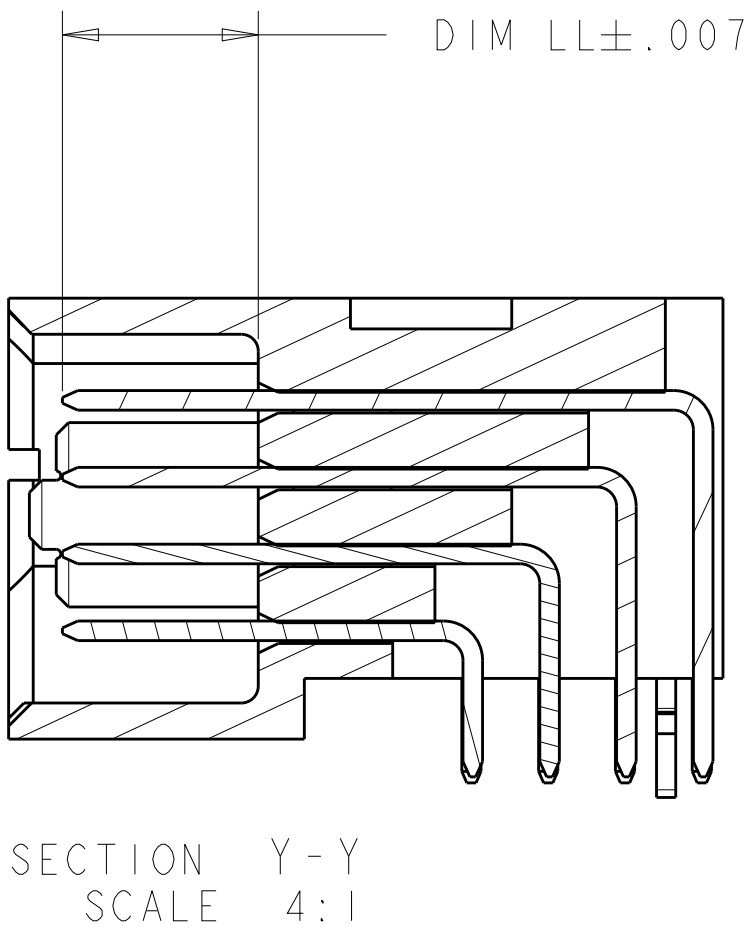

- 1 "AMP", PART NUMBER AND DATE CODE TO BE MARKED IN AREA SHOWN
PARTS UNDER 2.00 LONG MAY BE MARKED ON BOTH SIDES
- 2 MATERIAL: HOUSING - GLASS FILLED HIGH TEMP THERMO PLASTIC, UL94 V-0
SIGNAL CONTACT - HIGH CONDUCTIVITY COPPER ALLOY
POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY
- 3 CONTACT PLATING: NOBLE METAL PLATING ON CONTACT FUNCTIONAL AREA
OF POWER AND SIGNAL CONTACTS
- 4 MECHANICAL CONNECTOR KEEP OUT ZONE
- 5 DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER
- 6 PCB - ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES
- 7 PCB - 0.0453 ±.0010 DRILLED HOLES PLATED WITH .0003 MIN Sn
OVER .001 TO .003 Cu PLATING TO ACHIEVE A .040 ±.030 HOLE
- 8 VARIABLE DIMENSIONS SHOW ON TABLE OR PART VIEW
- 9 REFER TO PAGE 10 FOR DETAIL DIMENTIONS.

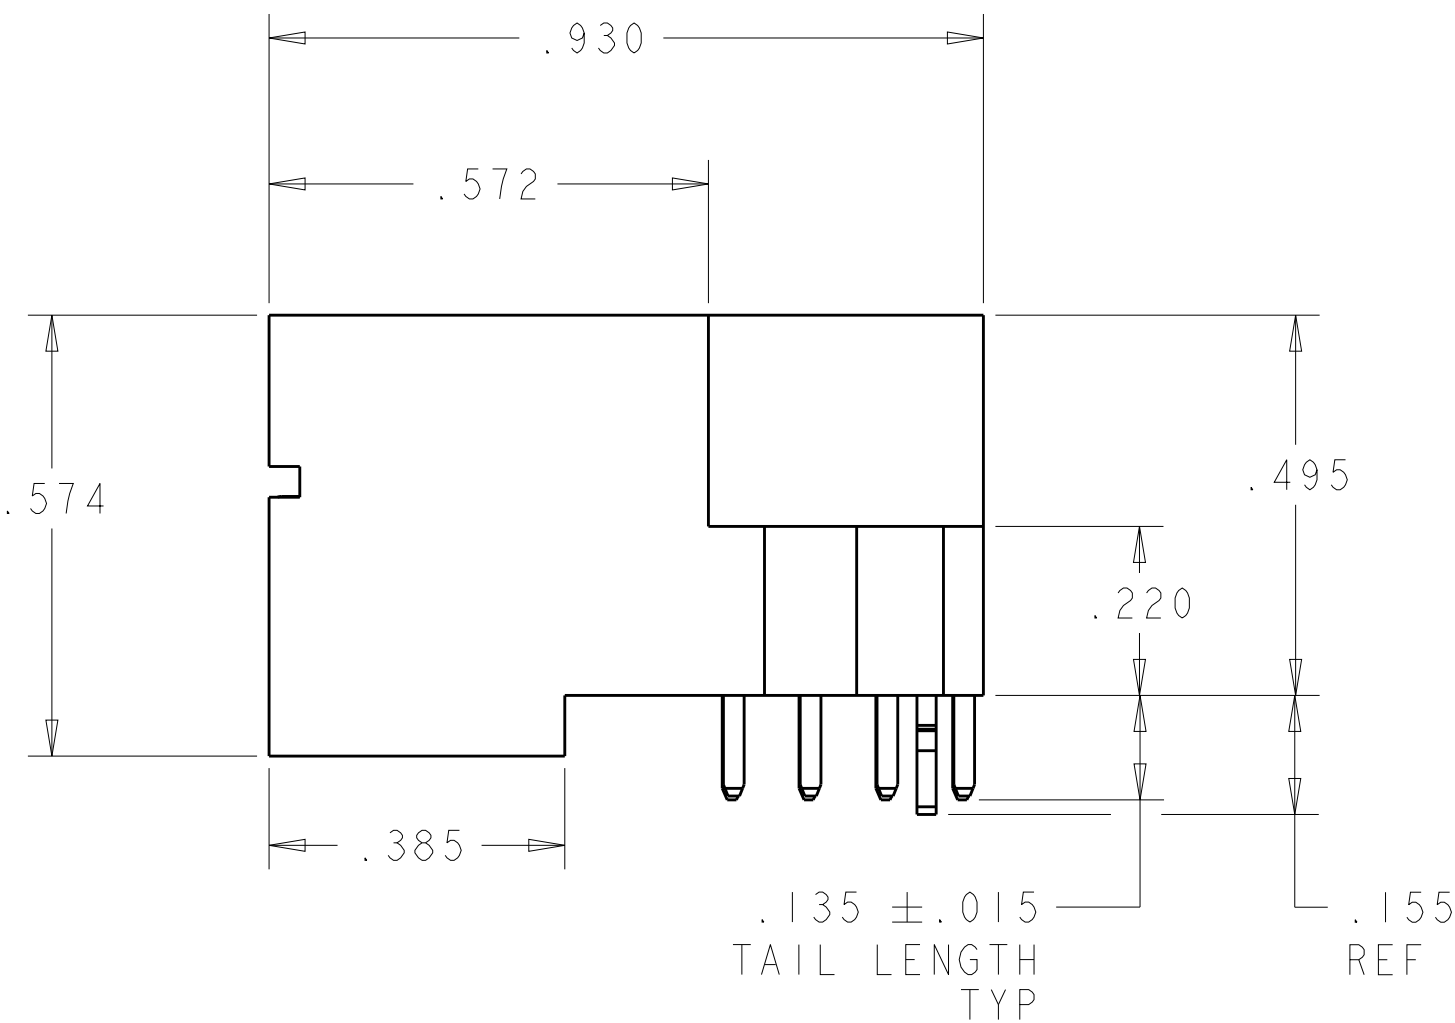

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. ZHAO	10APR2007	TE Connectivity	
		CHK S. ZHAO	10APR2007		
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
		0 PLC ±"		PRODUCT SPEC	
		1 PLC ±.01		108-2292	
		2 PLC ±.01		APPLICATION SPEC	
		3 PLC ±.005		114-13251	
		4 PLC ±.0020		WEIGHT	
		ANGLES ±2°		CUSTOMER DRAWING	
MATERIAL : 2		FINISH : 3		SIZE A1	
				CAGE CODE 00779	
				DRAWING NO 6450830	
				RESTRICTED TO -	
				SCALE 4:1	
				SHEET 1	
				OF 42	
				REV S2	


LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-

2.100	1.495	1.020	1.990	0.250	0.250	2.200	2.340	.3450	3P + 16S + 3P	7-6450830-3
1.000	.895	.570	.890	-	-	1.100	1.240	.345	1P + 8S + 1P	7-6450830-2
4.750	3.645	3.070	4.640	.250		4.850	4.990	.370	3ACP + 7P + 20S + 5P	7-6450830-1
3.850	3.4675	1.010	3.740	.230	.230	3.950	4.090	.2775	6LP + 96S + 4LP	7-6450830-0
3.850	3.4675	1.010	3.740	.230	.230	3.950	4.090	.2775	6LP + 96S + 4LP	6-6450830-9
2.420	2.0375	.780	2.310	.230	.230	2.520	2.660	.2775	4LP + 48S + 4LP	6-6450830-8
5.400	4.5575	1.700	5.290	.230	.230	5.500	5.640	.2775	12LP + 112S + 8LP	6-6450830-7
2.860	2.4775	1.820	2.750	.230	.300	2.960	3.100	.370	5ACP + 24S + 4LP	6-6450830-6
2.225	1.620	1.045	2.115	.250	.250	2.325	2.465	.345	3P + 20S + 3P	6-6450830-4
3.600	2.895	1.795	3.490	.300	.250	3.700	3.840	.345	6P + 40S + 3ACP	6-6450830-3
3.030		1.345 	2.920			3.130	3.270	.345 	5HDP + 24S + 1P + 7LP	6-6450830-2
1.135	.9825	.550	1.025	-	-	1.235	1.375	.2775	2LP + 16S + 2LP	6-6450830-0
3.200	3.120	2.370	3.090	-	.300	3.300	3.440	.320	7ACP + 24S + 1P	5-6450830-8
2.800	1.945	1.270	2.690	.250	.250	2.900	3.040	.345	4P + 24S + 4P	5-6450830-7
2.700	1.595	1.120	2.590	.250	.300	2.800	2.940	.345	3ACP + 16S + 5P	5-6450830-6
2.655	2.5025	2.145	2.545	.115		2.755	2.895	.345	3ACP+3P+12S+2LP	5-6450830-5
1.350	1.020	.745	1.240	.250	.250	1.450	1.590	.320	2P + 8S + 2P	5-6450830-4
2.450	1.595	1.120	2.340	.250	.300	2.550	2.690	.345	3ACP + 16S + 4P	5-6450830-3
2.350	1.670	1.095	2.240	.200	.200	2.450	2.590	.320	4HDP + 20S + 4HDP	5-6450830-2
1.300	1.145	.520	1.190	-	-	1.400	1.540	.345	1P + 24S + 1P	5-6450830-1
1.025	.7575	.550	.915	-	-	1.125	1.265	.2775	2LP + 8S + 3LP	5-6450830-0
2.300	1.6950	1.020	2.190	.250	.250	2.400	2.540	.3450	3P + 24S + 3P	4-6450830-9
2.995	2.190	1.415	2.885	.350	.280	3.095	3.235	.3025	8LP + 24S + 3P	4-6450830-8
1.280	.875	.575	1.170	.250	-	1.380	1.520	.3015	2LP + 8S + 2P	4-6450830-7
1.750	1.345	.845	1.640	.250	.250	1.850	1.990	.395	2P + 16S + 2P	4-6450830-6
2.300	1.6950	1.020	2.190	.250	.250	2.400	2.540	.3450	3P + 24S + 3P	4-6450830-5
1.600	1.245	.770	1.490	.250	.250	1.700	1.840	.3450	2P + 16S + 2P	4-6450830-4
6.100	2.195	1.845	5.990	.250	.375	6.200	6.340	.395	4P + 12S + 16P	4-6450830-3
2.500	1.645	1.270	2.390	.250	.250	2.600	2.740	.3450	4P + 12S + 4P	4-6450830-2
3.675	2.445	2.045	3.565	.375	.375	3.775	3.915	.3450	5ACP + 12S + 4ACP	3-6450830-8
1.190	-	1.060	1.080	-	.230	1.290	1.430	.3775	6LP + 8S	3-6450830-7
1.920	1.0775	.870	1.810	-	.300	2.020	2.160	.320	2ACP + 8S + 4LP	3-6450830-6
2.195	1.465	.865	2.085		.215	2.295	2.435	.2775	3LP + 20S + 4HDP	3-6450830-5
4.400	3.220	2.695	4.290		.300	4.500	4.640	.3700	8ACP + 16S + 4ACP	3-6450830-4
3.075	2.395	1.920	2.965		.300	3.175	3.3150	.3700	4ACP + 12S + 3P	3-6450830-3
3.075	2.395	1.920	2.965		.300	3.175	3.3150	.3700	4ACP + 12S + 3P	3-6450830-2
.935	.7825	.550	.825	-	-	1.035	1.175	.2775	2LP + 8S + 2LP	3-6450830-1
3.075	2.395	1.920	2.965		.300	3.175	3.3150	.3700	4ACP + 12S + 3P	3-6450830-0
2.160	1.7775	1.145	2.050	-	.300	2.260	2.400	.3450	3ACP + 24S+ 4LP	2-6450830-9
1.600	1.295	.720	1.490	.200	.200	1.700	1.840	.3450	2P + 20S + 2P	2-6450830-8
1.500	1.195	.720	1.390	.200	.200	1.600	1.740	.3450	2P + 16S + 2P	2-6450830-7
1.475	1.320	.595	1.365	-	-	1.575	1.715	.3700	1P + 24S + 1P	2-6450830-6
2.100	1.795	.720	1.990	.200	.200	2.200	2.340	.3450	2P + 40S + 2P	2-6450830-4
2.750	2.0450	1.270	2.640	.300	.250	2.850	2.990	.3450	4P + 28S + 3ACP	1-6450830-9
2.460	1.8575	.625	2.350	-	-	2.560	2.700	.1700	1P+2LP+48S+2LP+1P	1-6450830-7
-	-	-	-	-	-	-	-	-	4P+16S+24S+2HDP	1-6450830-8
2.750	2.0450	1.270	2.640	.300	.250	2.850	2.990	.3450	4P + 28S + 3ACP	1-6450830-5
1.800	1.4450	.770	1.690	.250	.250	1.900	2.040	.3450	2P + 24S + 2P	1-6450830-4
2.375	1.520	.845	2.265	.250	.300	2.475	2.615	.3450	2ACP + 24S + 4P	1-6450830-3
3.000	2.5025	1.945	2.890	.230		3.000	3.240	.3200	8HDP + 20S + 5LP	1-6450830-2
3.615	1.6850	1.010	3.505		.230	3.715	3.855	.2775	6LP + 24S + 10P	1-6450830-0
2.300	1.6950	1.020	2.190	.250	.250	2.400	2.540	.3450	3P + 24S + 3P	6450830-9
2.480	2.3275	1.520	2.370	-	.250	2.580	2.720	.3450	5P + 32S + 2LP	6450830-8
3.400	2.2950	1.570	3.290	.250	.250	3.500	3.640	.3450	5P + 24S + 5P	6450830-7
1.800	1.4450	.770	1.690	.250	.250	1.900	2.040	.3450	2P + 24S + 2P	6450830-5
1.780	1.6025	.770	1.670	-	.250	1.880	2.020	.3450	2P + 32S + 2LP	6450830-4
2.310	1.6725	1.240	2.200	.230	.230	2.410	2.550	.3025	8LP + 16S + 6LP	6450830-3
2.315	1.7100	1.035	2.205	.250	.230	2.415	2.555	.3025	6LP + 24S + 3P	6450830-2
.935	.7825	.550	.825	-	-	1.035	1.175	.2775	2LP + 8S + 2LP	6450830-1
DIM V	DIM R	DIM W	DIM U	DIM S	DIM T	DIM D	DIM L	DIM K	DESCRIPTION	PART NUMBER

4.350	2.405	1.380	4.240			4.450	4.590	.2775	9LP + 36S + 1P + 16LP	8-6450830-2
4.500	2.170	.795	4.390			4.600	4.740	.345	2P + 48S + 10P	8-6450830-1
2.250	1.645	1.170	2.140	.250	.300	2.300	2.490	.370	3ACP + 16S + 3P	8-6450830-0
4.300	2.695	2.020	4.190	.250	.250	4.400	4.540	.345	7P + 24S + 7P	7-6450830-9
4.180	3.325	1.700	4.070	.250	.230	4.280	4.420	.2775	12LP + 60S + 4P	7-6450830-8
2.650	2.545	1.270	2.540	-	.250	2.750	2.890	.345	4P + 48S + 1P	7-6450830-7
1.750	1.3675	1.060	1.755	.230	.230	1.850	1.990	.2775	3LP + 12S + 4LP	7-6450830-6
DIM V	DIM R	DIM W	DIM U	DIM S	DIM T	DIM D	DIM L	DIM K	DESCRIPTION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
INCHES



MATERIAL
-

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC
1 PLC
2 PLC
3 PLC
4 PLC
ANGLES
FINISH

±
±.01
±.005
±.0020
#P

DWN
CHK
S. ZHAO

S. ZHAO

10APR2007

10APR2007

APVD
S. ZHAO

PRODUCT SPEC
108-2292

APPLICATION SPEC
114-13251

WEIGHT
-

CUSTOMER DRAWING

NAME
S. ZHAO

RIGHT ANGLE WITH SHORT GUIDES
AND LP CONTACTS ASSEMBLY
MULTI-BEAM XLE

SIZE
A1

CAGE CODE
100779

DRAWING NO
6450830

RESTRICTED TO
-

SCALE
4:1


SHEET
2

OF
42


REV
S2

4805 (3/11)

LOC	DIST	REVISIONS				
		P	LYR	DESCRIPTION	DATE	OWN
ES	00	-	-	SEE SHEET 1	-	-

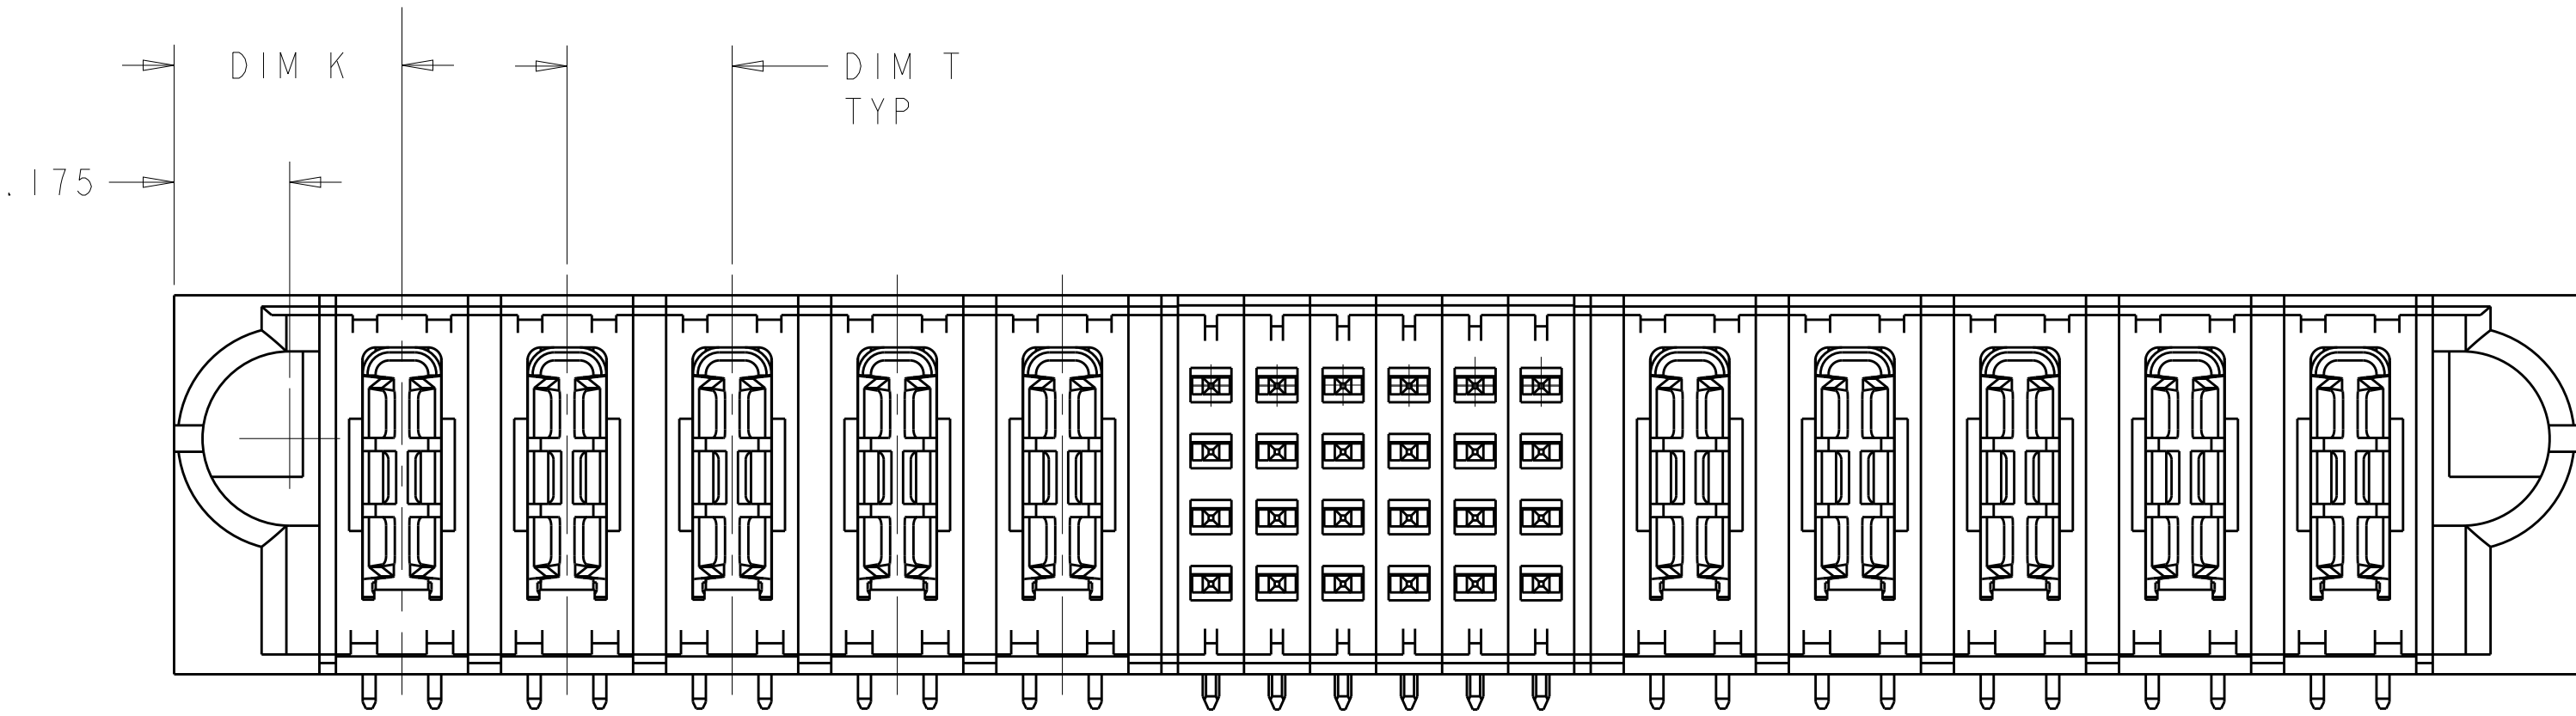

FOR "P+S+P"CONFIGURATION
UNSPECIFY DIMENSIONS PLEASE REFER TO PAGE 1

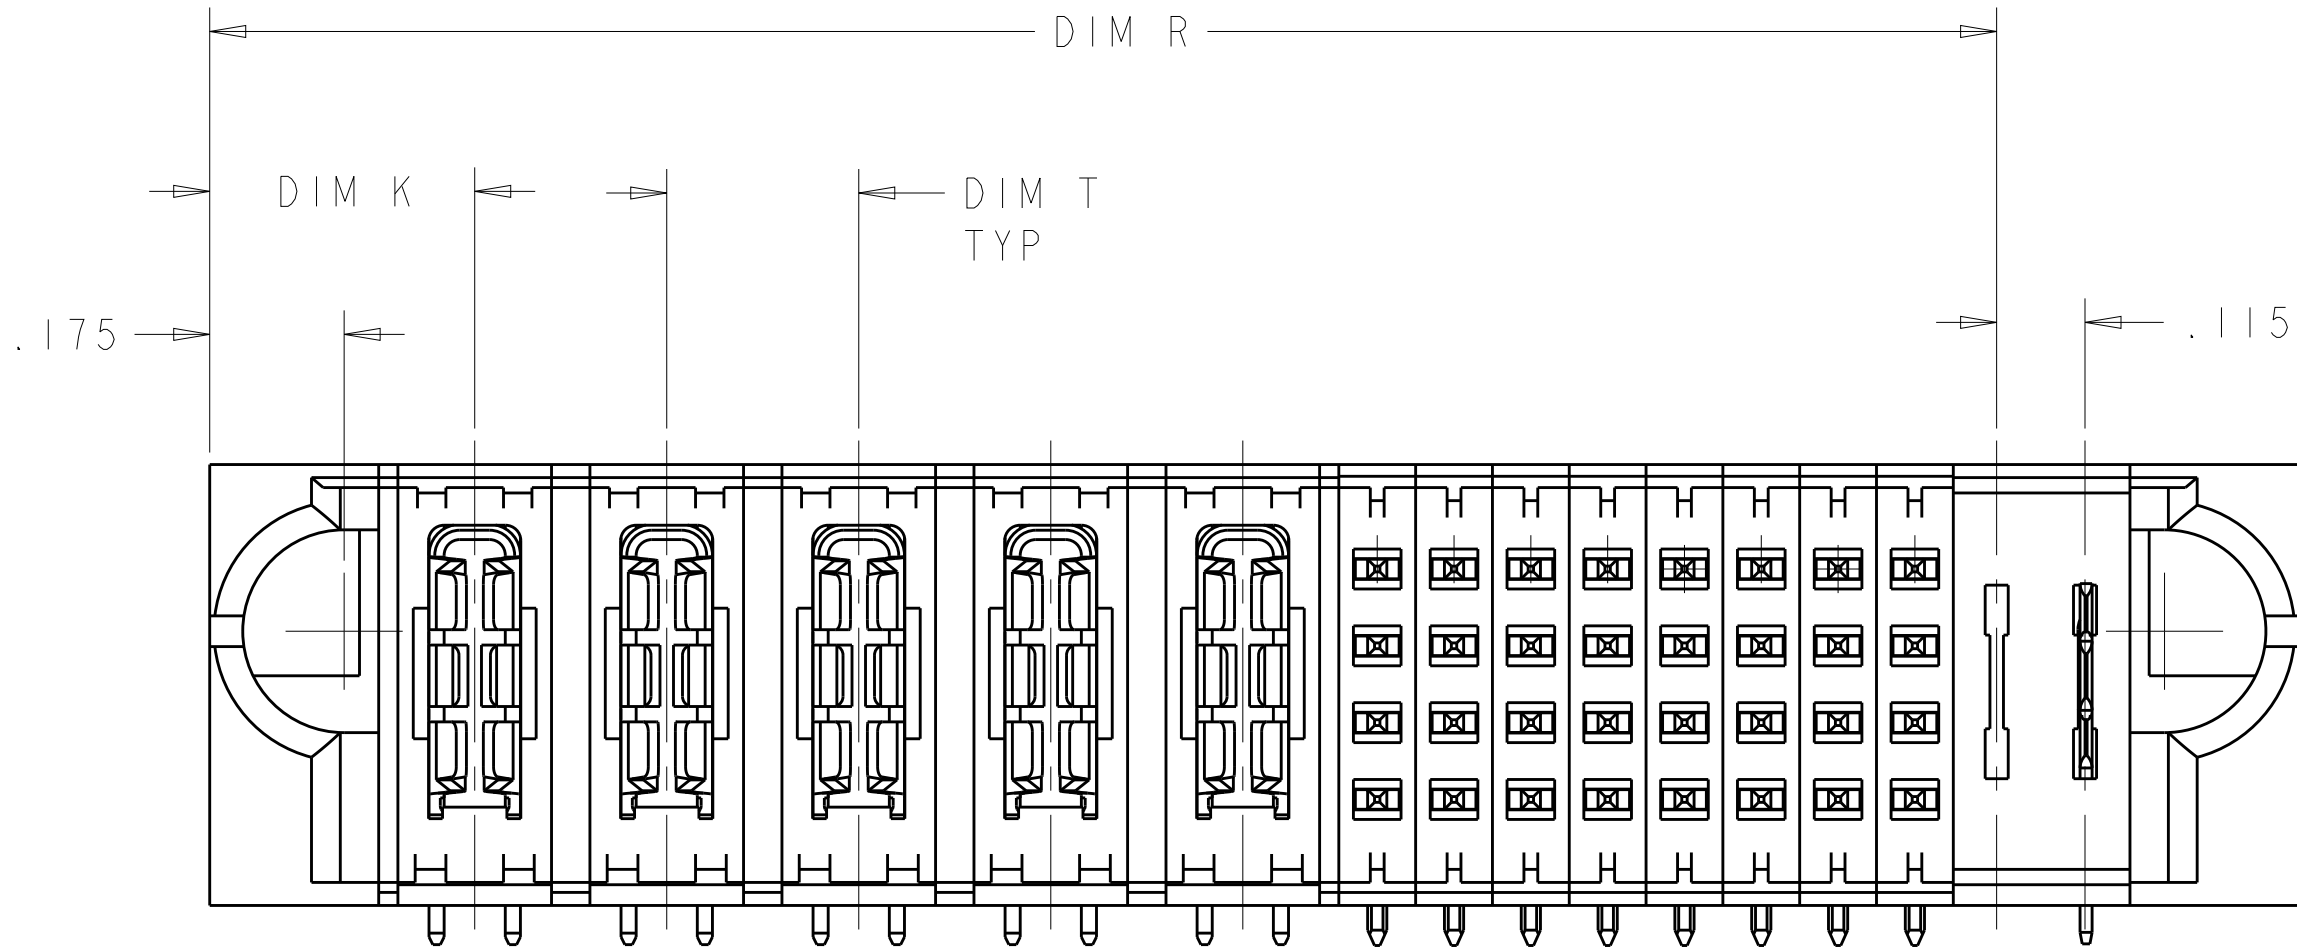

FOR "P+S+LP"CONFIGURATION
UNSPECIFY DIMENSIONS PLEASE REFER TO PAGE 1

HOLD DOWN	HD
.135 SIGNAL CON, ROW D,MFBL LL=.304	FJ
.135 SIGNAL CON, ROW C,MFBL LL=.304	FK
.135 SIGNAL CON, ROW B,MFBL LL=.304	FN
.135 SIGNAL CON, ROW A,MFBL LL=.304	FS
.135 SIGNAL CON, ROW D,MLBF LL=.204	E
.135 SIGNAL CON, ROW C,MLBF LL=.204	F
.135 SIGNAL CON, ROW B,MLBF LL=.204	G
.135 SIGNAL CON, ROW A,MLBF LL=.204	H
.135 SIGNAL CON, ROW D,STANDARD LL=.254	J
.135 SIGNAL CON, ROW C,STANDARD LL=.254	K
.135 SIGNAL CON, ROW B,STANDARD LL=.254	N
.135 SIGNAL CON, ROW A,STANDARD LL=.254	S
.135 STANDARD POWER CON,3 BEAMS	TM
.135 SOLDER LOWER POWER,MFBL	LMF
.135 SOLDER LOWER POWER,STD	LM
.135 SOLDER LOWER POWER,MLBF	LML
DESCRIPTION	IDENTIFIER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

S.ZHAO

10APR2007

CHK

S.ZHAO

10APR2007

APVD

S.ZHAO

-

DIMENSIONS:

INCHES

0 PLC

±"

1 PLC

±.01

2 PLC

±.01

3 PLC

±.005

4 PLC

±.0020

ANGLES

±2°

FINISH

-

TOLERANCES UNLESS OTHERWISE SPECIFIED:

PRODUCT SPEC

108-2292

APPLICATION SPEC

114-13251

WEIGHT

-

MATERIAL

-

CUSTOMER DRAWING

TE

TE Connectivity

NAME

RIGHT ANGLE WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM XLE

SIZE

A1

CAGE CODE

00779

DRAWING NO

6450830

RESTRICTED TO

-

SCALE

4:1

SHEET

3


OF

42

REV


S2

PART NUMBER	ROWS		POWER						SIGNAL						POWER			
			LP1	LP2	LP3	LP4	LP5	LP6	1	2	3	4	5	6	P1	P2	P3	
6450830-2	D C B A		LM	LM	LM	LM	LM	LM	J	J	J	J	J	J	TM	TM	TM	
									K	K	K	K	K	K				
									N	N	G	N	N	N				
									S	S	S	S	S	S				
6LP + 24S + 3P																		

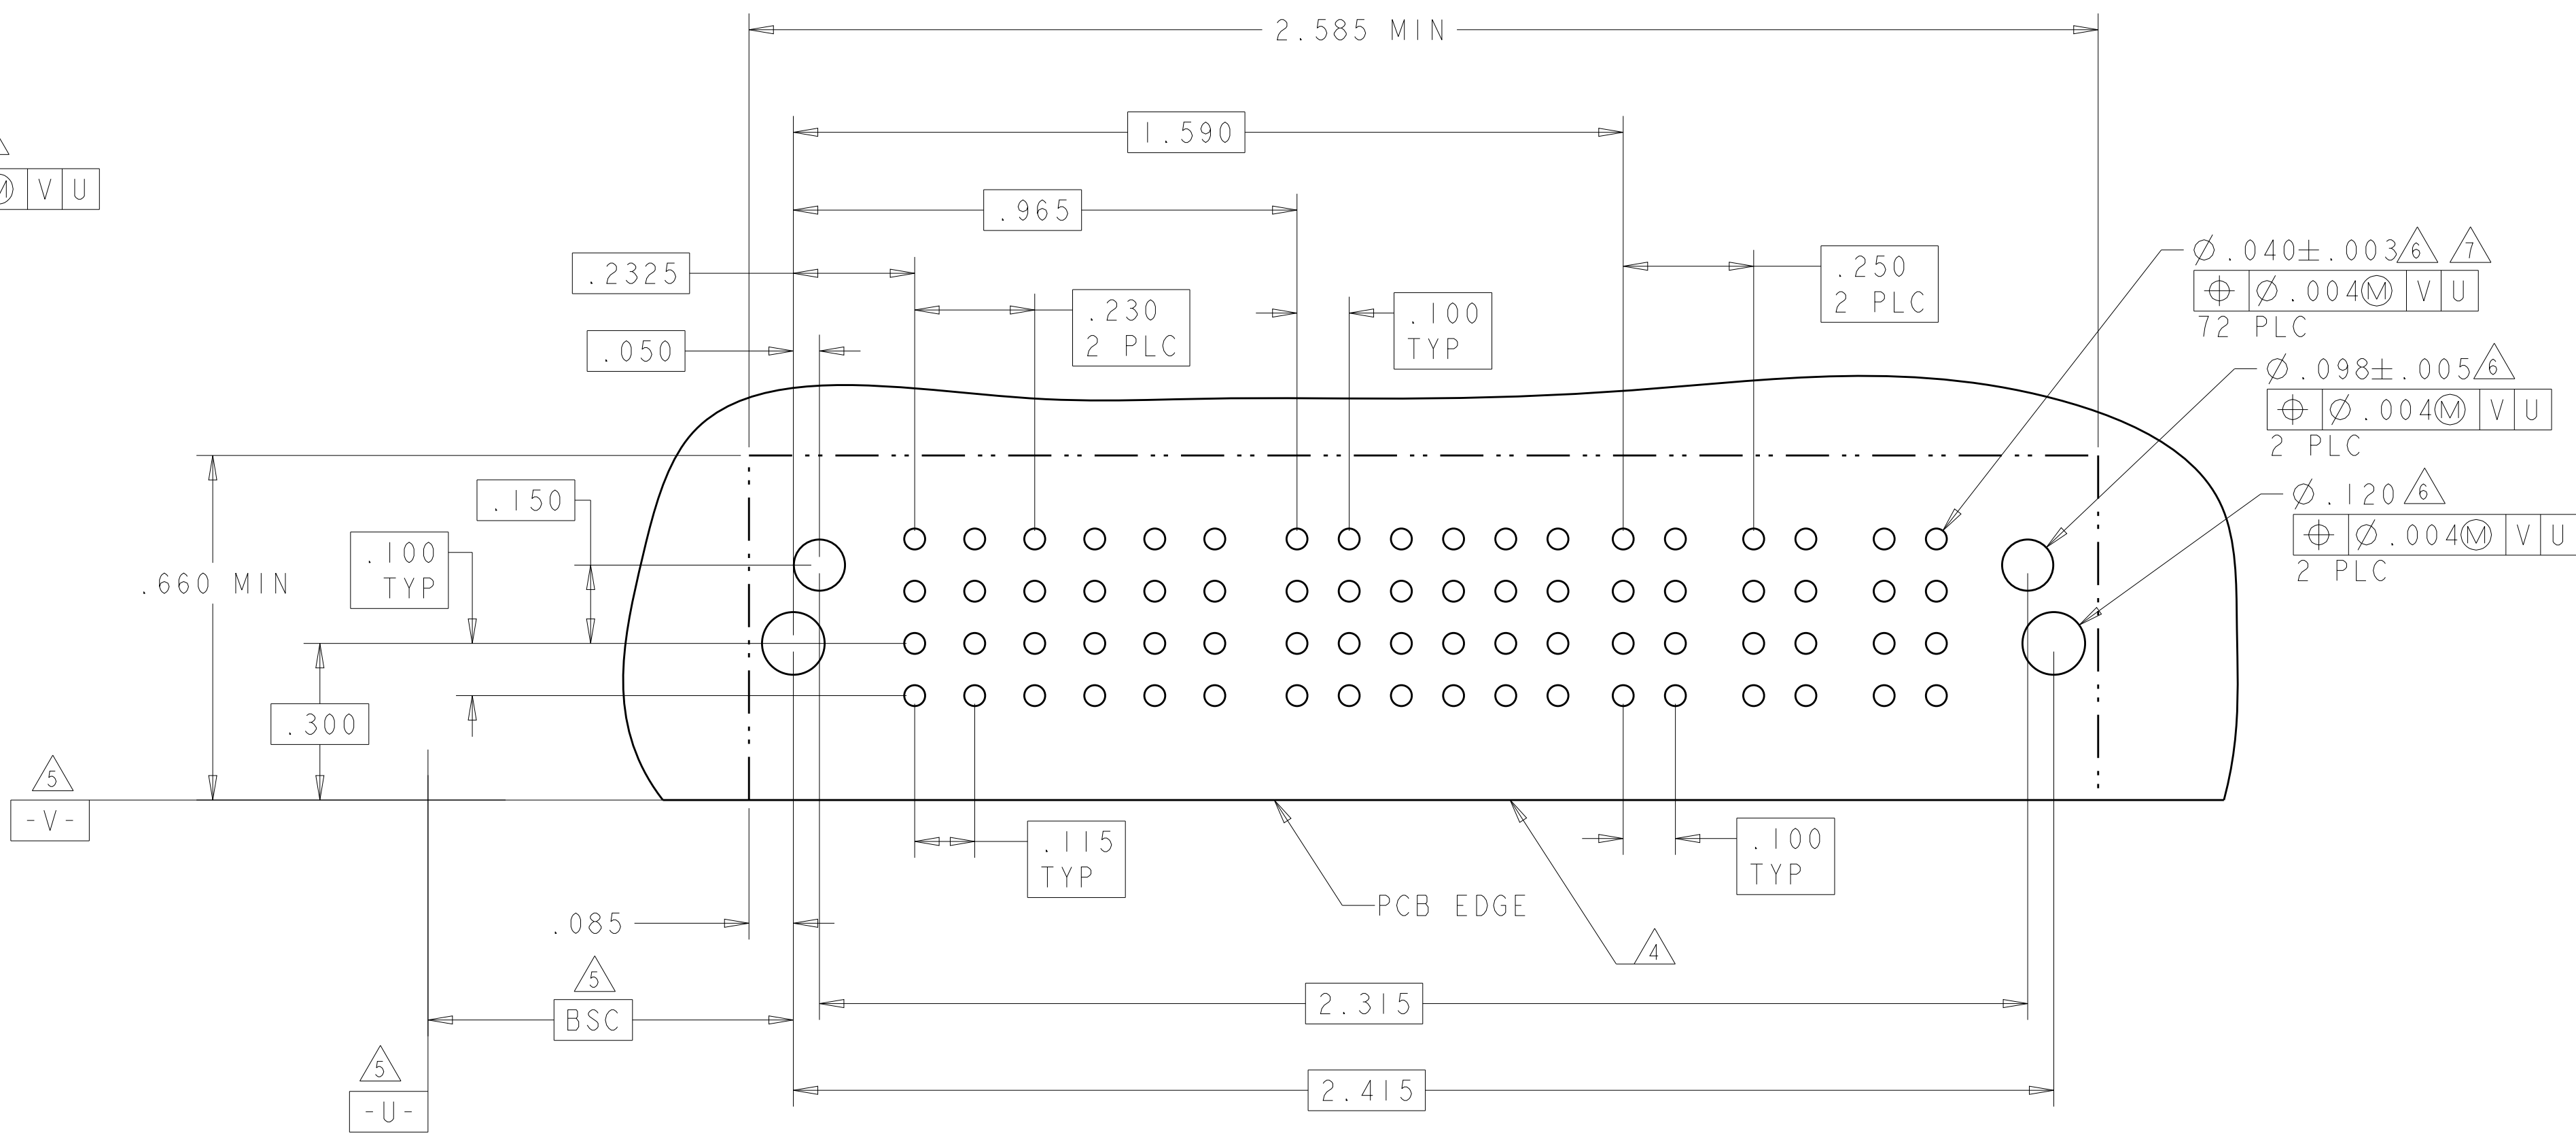
4805 (3/11)

LOC		DIST		REVISIONS				
ES	00	P	LTR	DESCRIPTION		DATE	DWN	APVD
		-		SEE SHEET 1		-	-	-


PART NUMBER	ROWS		POWER								SIGNAL				POWER						
			LP1	LP2	LP3	LP4	LP5	LP6	LP7	LP8	1	2	3	4	LP9	LP10	LP11	LP12	LP13	LP14	
6450830-3	D C B A										J	J	J	J							
											K	K	K	K							
											N	N	N	N							
											S	S	S	S							
8LP + 16S + 6LP																					

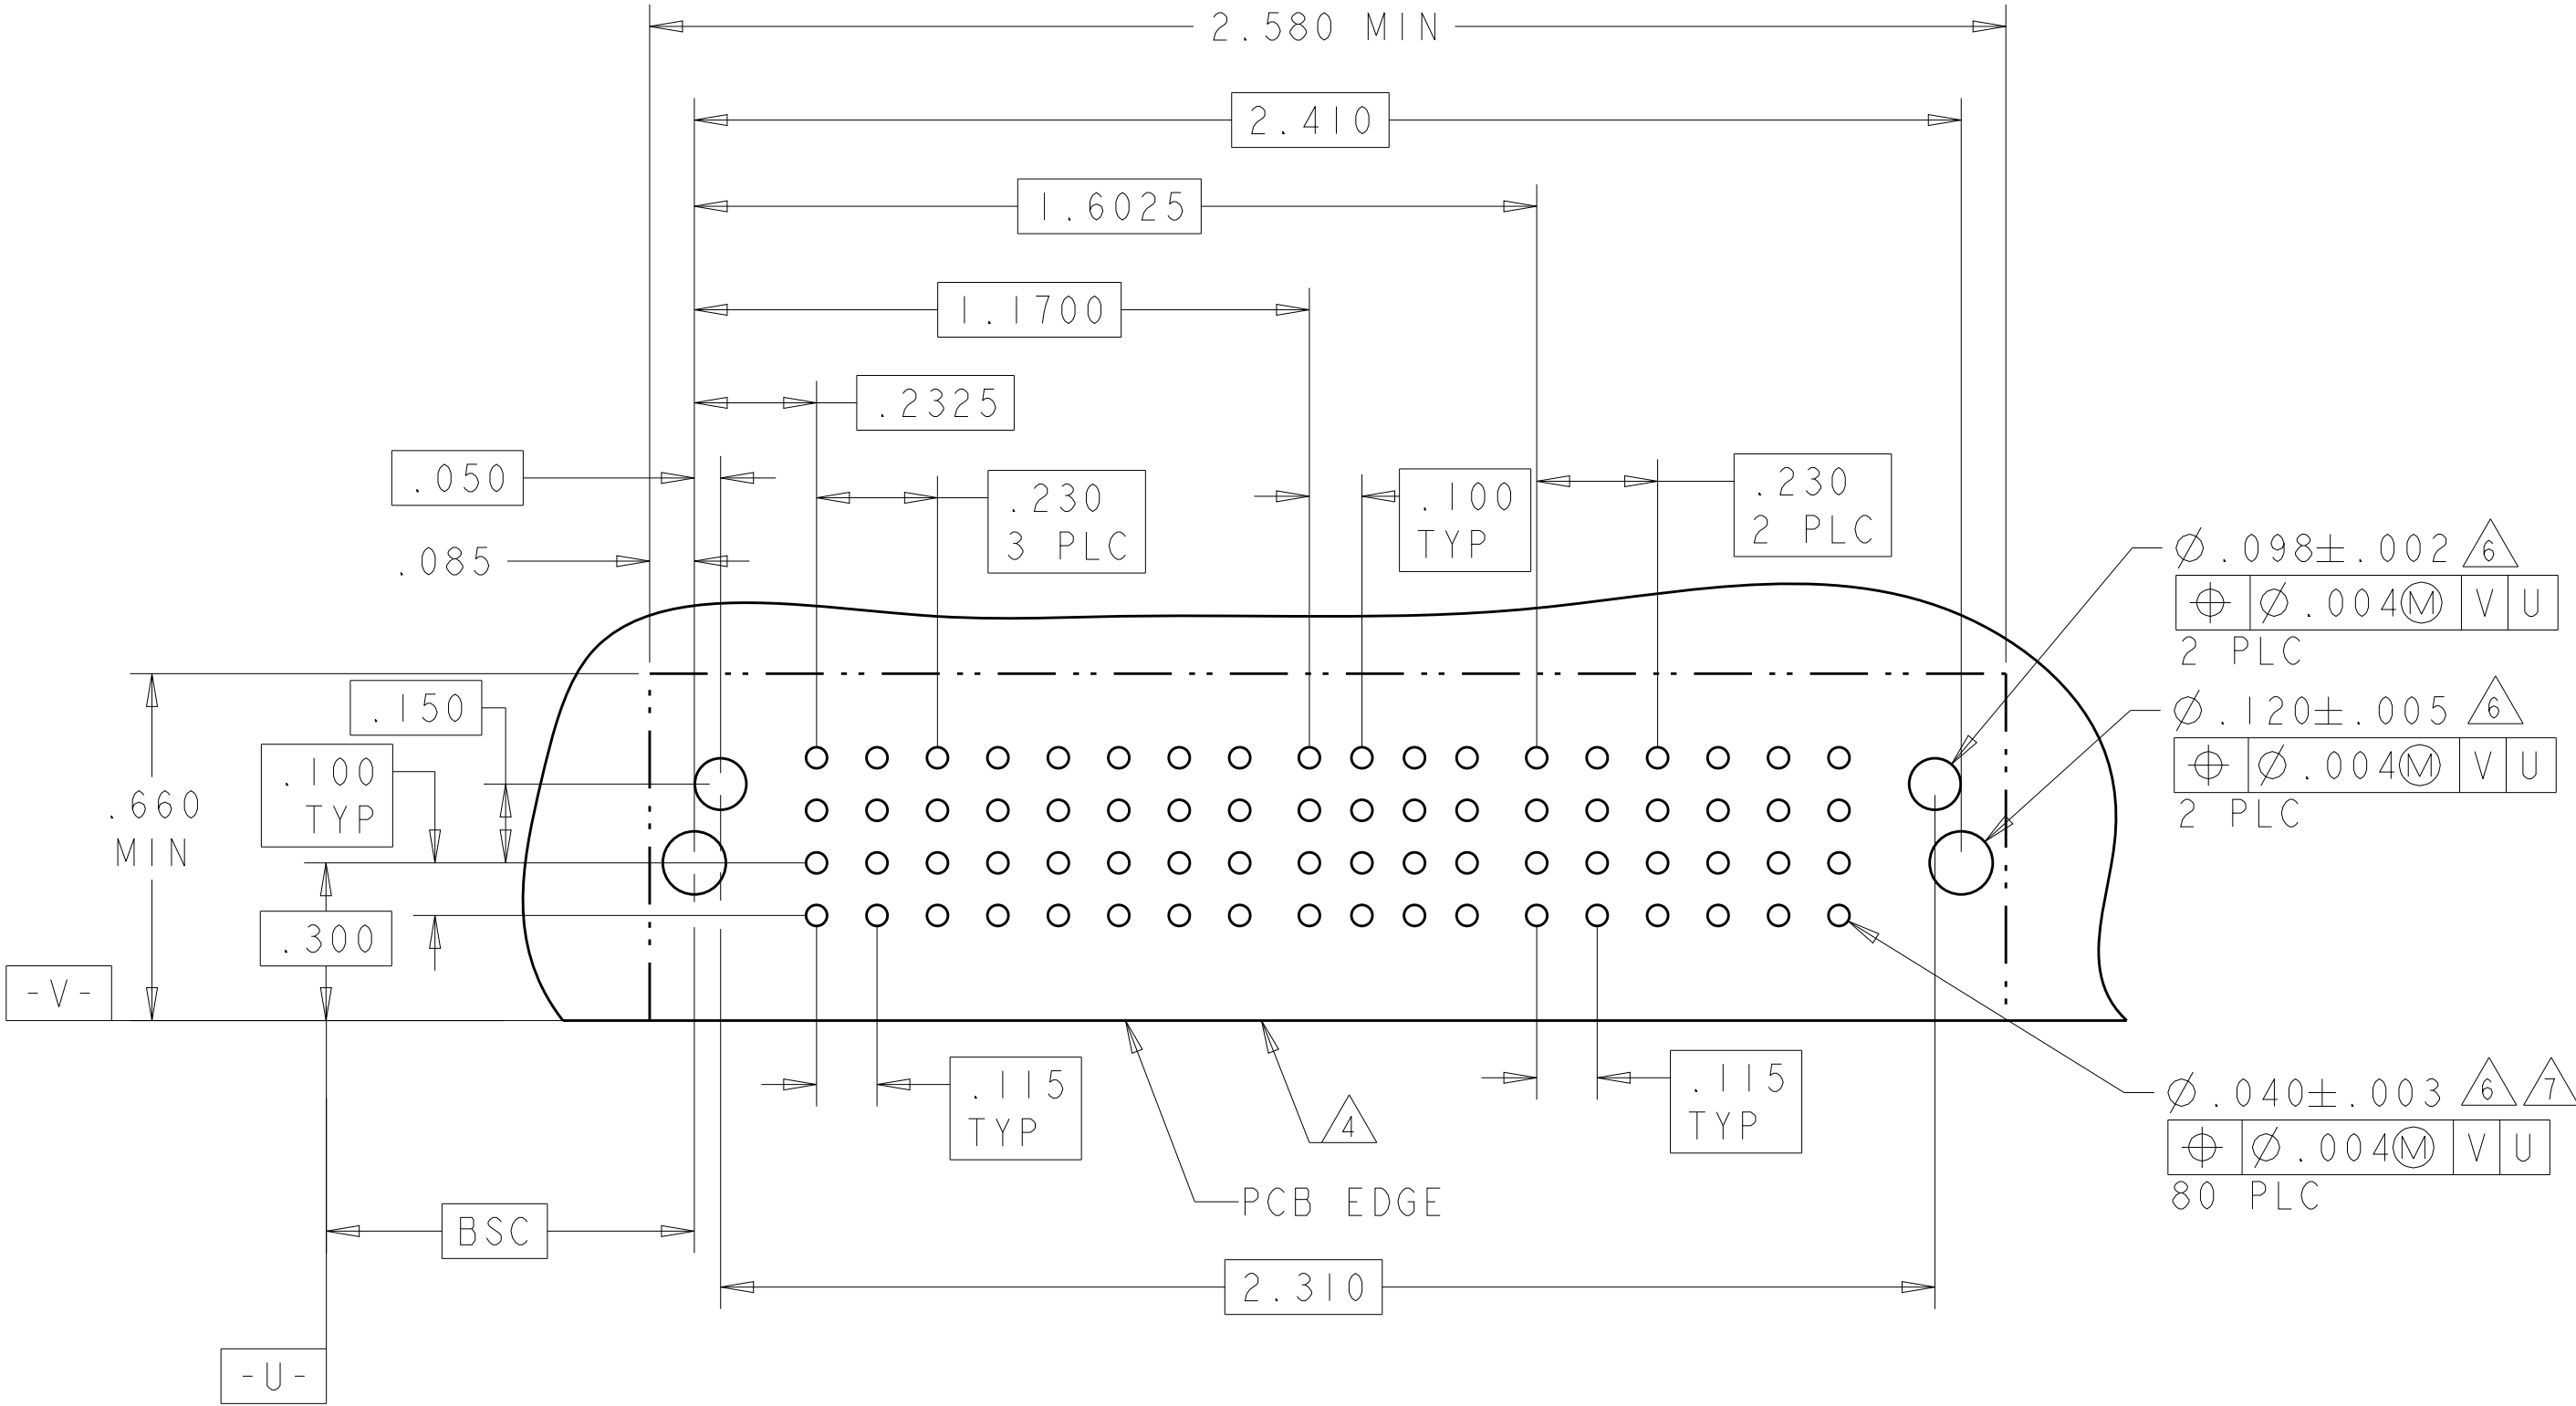

PART NUMBER	ROWS		POWER		SIGNAL								POWER		
			P1	P2	1	2	3	4	5	6	7	8	LPI	LP2	
6450830-4	D C B A	 HD	TM	TM	J	J	J	J	J	J	J	J	LM	LM	 HD
					K	K	K	K	K	K	K	K			
					N	N	N	N	N	N	N	N			
					S	S	S	S	S	S	S	S			
2P + 32S + 2LP															

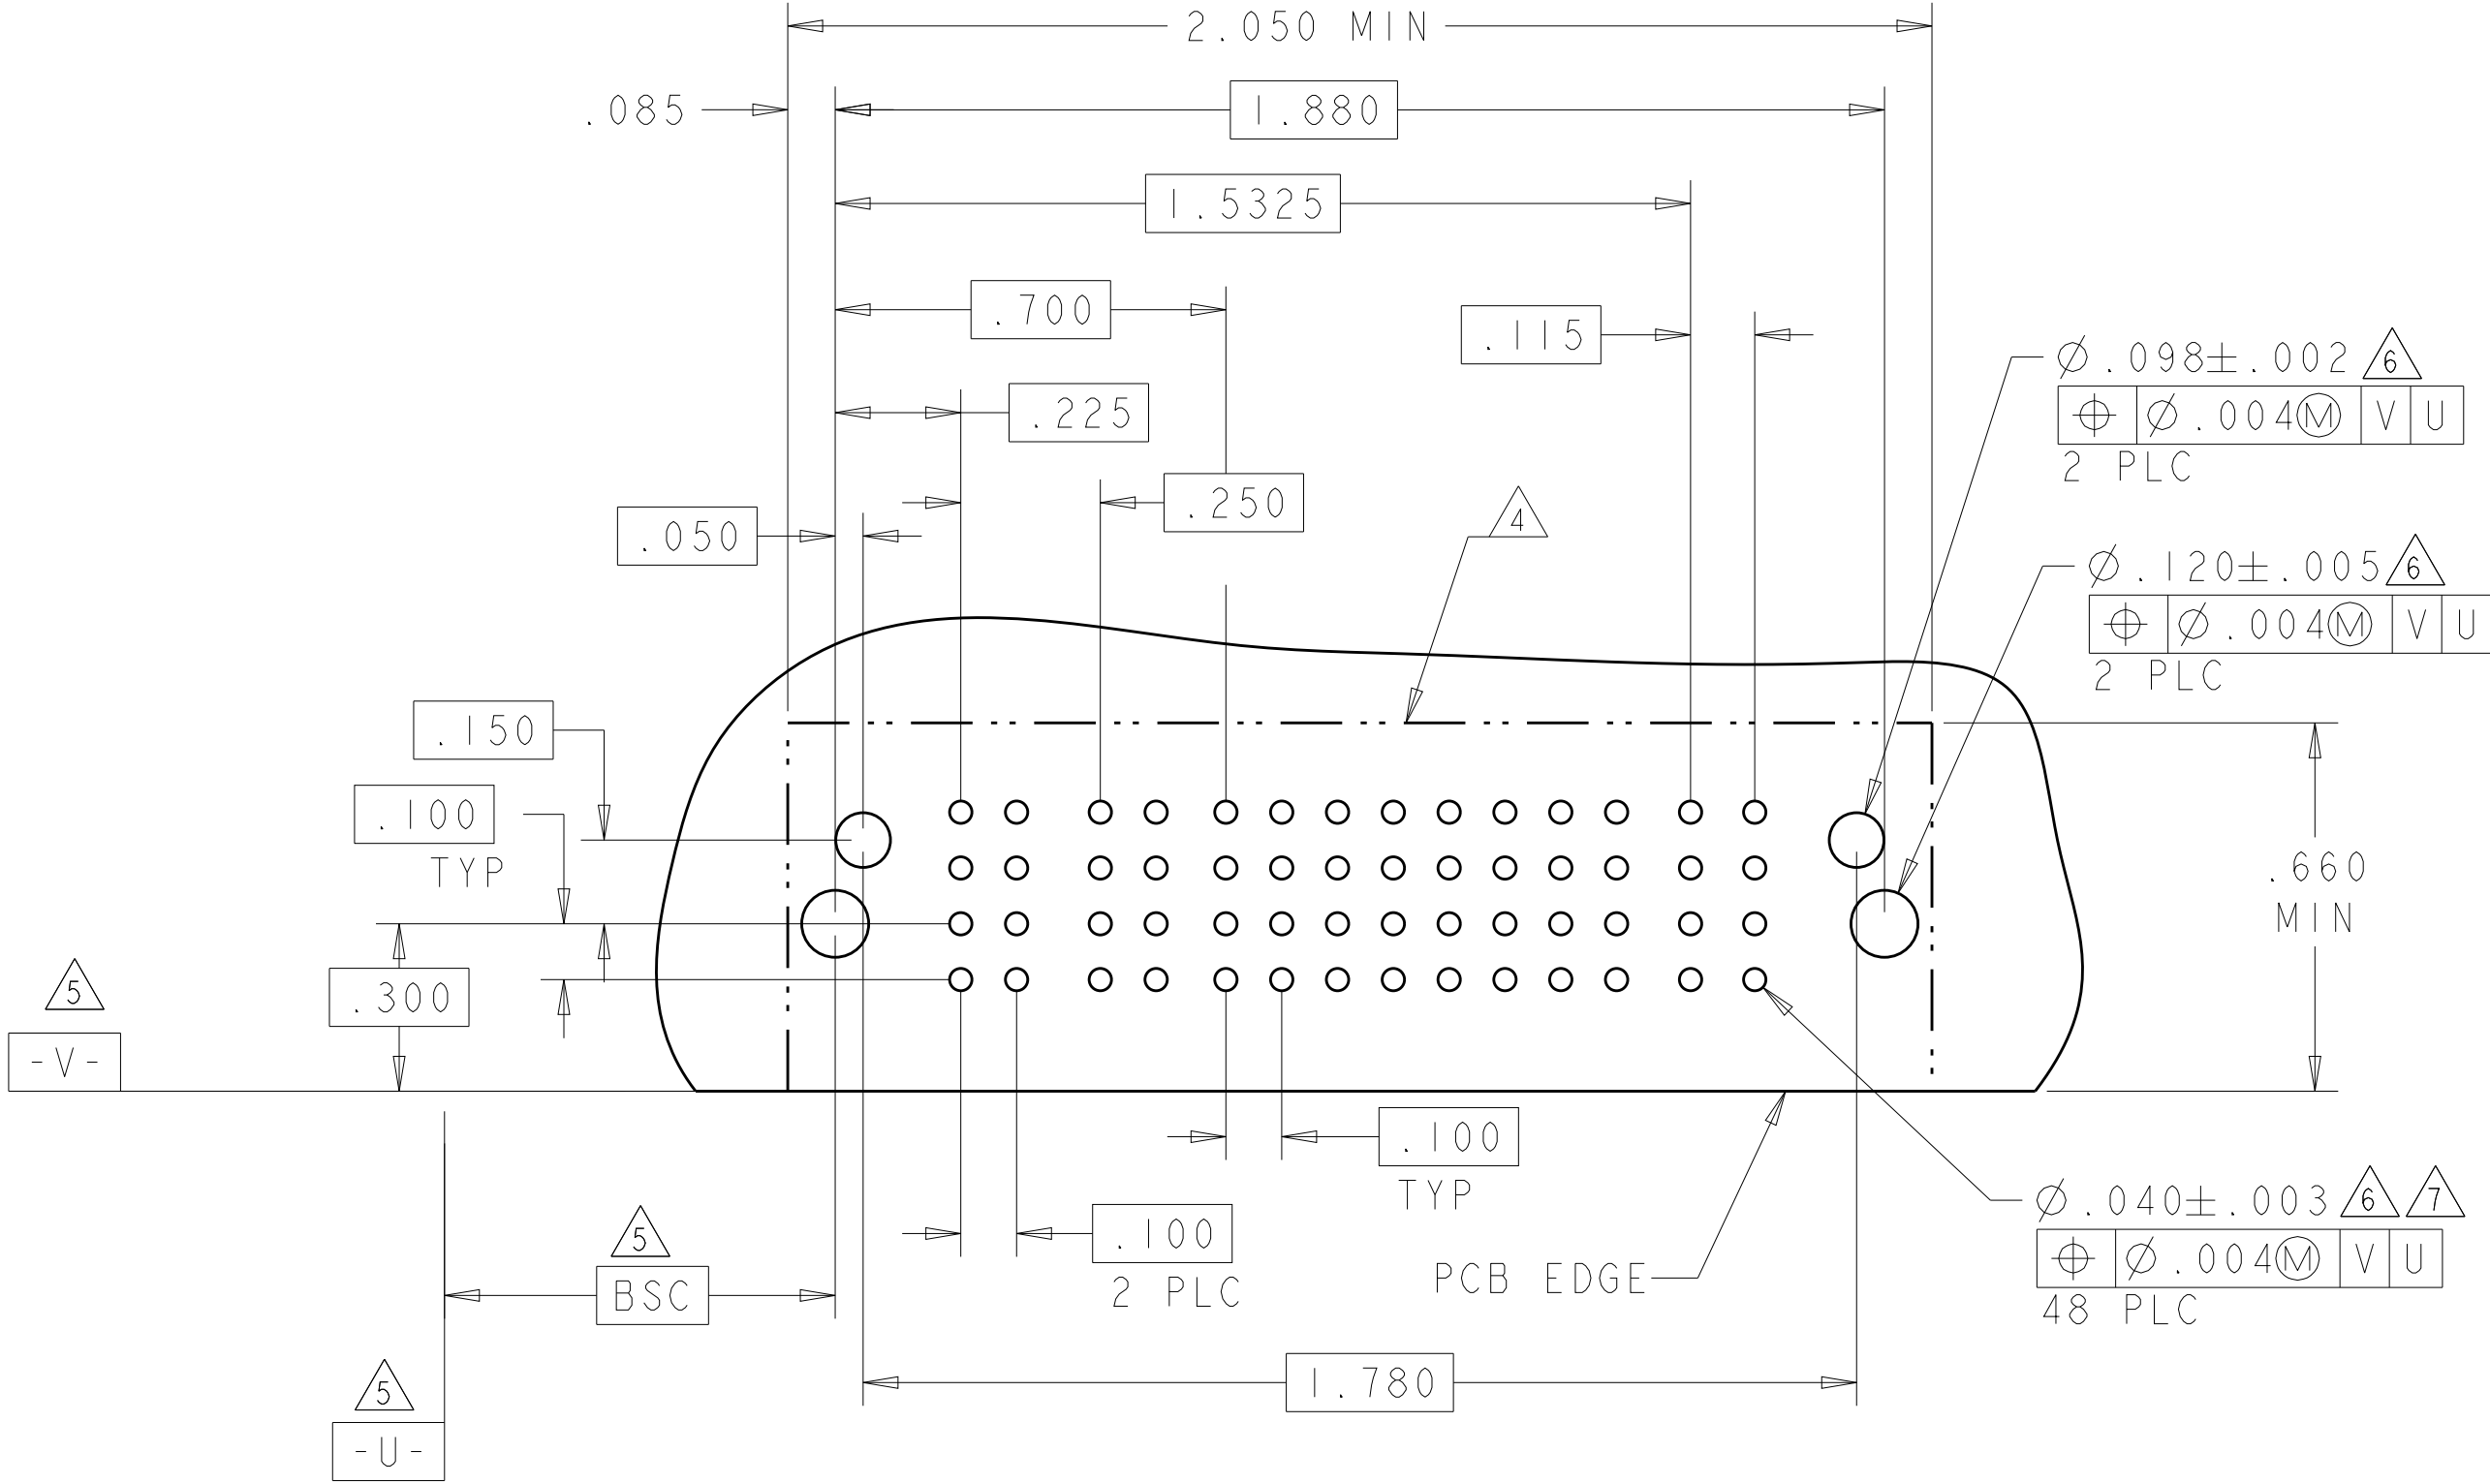

THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN	S.ZHAO	10APR2007	 TE Connectivity				
			CHK	S.ZHAO	10APR2007					
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	S.ZHAO	-	NAME	RIGHT ANGLE WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM XLE		
INCHES				PRODUCT SPEC						
		0 PLC ±		108-2292						
		1 PLC ±.01		APPLICATION SPEC						
		2 PLC ±.005		114-13251						
		4 PLC ±.0020		±?						
ANGLES							SIZE	CAGE CODE	DRAWING NO.	RESTRICTED TO
MATERIAL		FINISH		WEIGHT			A	00779	©=6450830	-
							CUSTOMER DRAWING			
							SCALE 4:1		SHEET 5 OF 42	REV S2


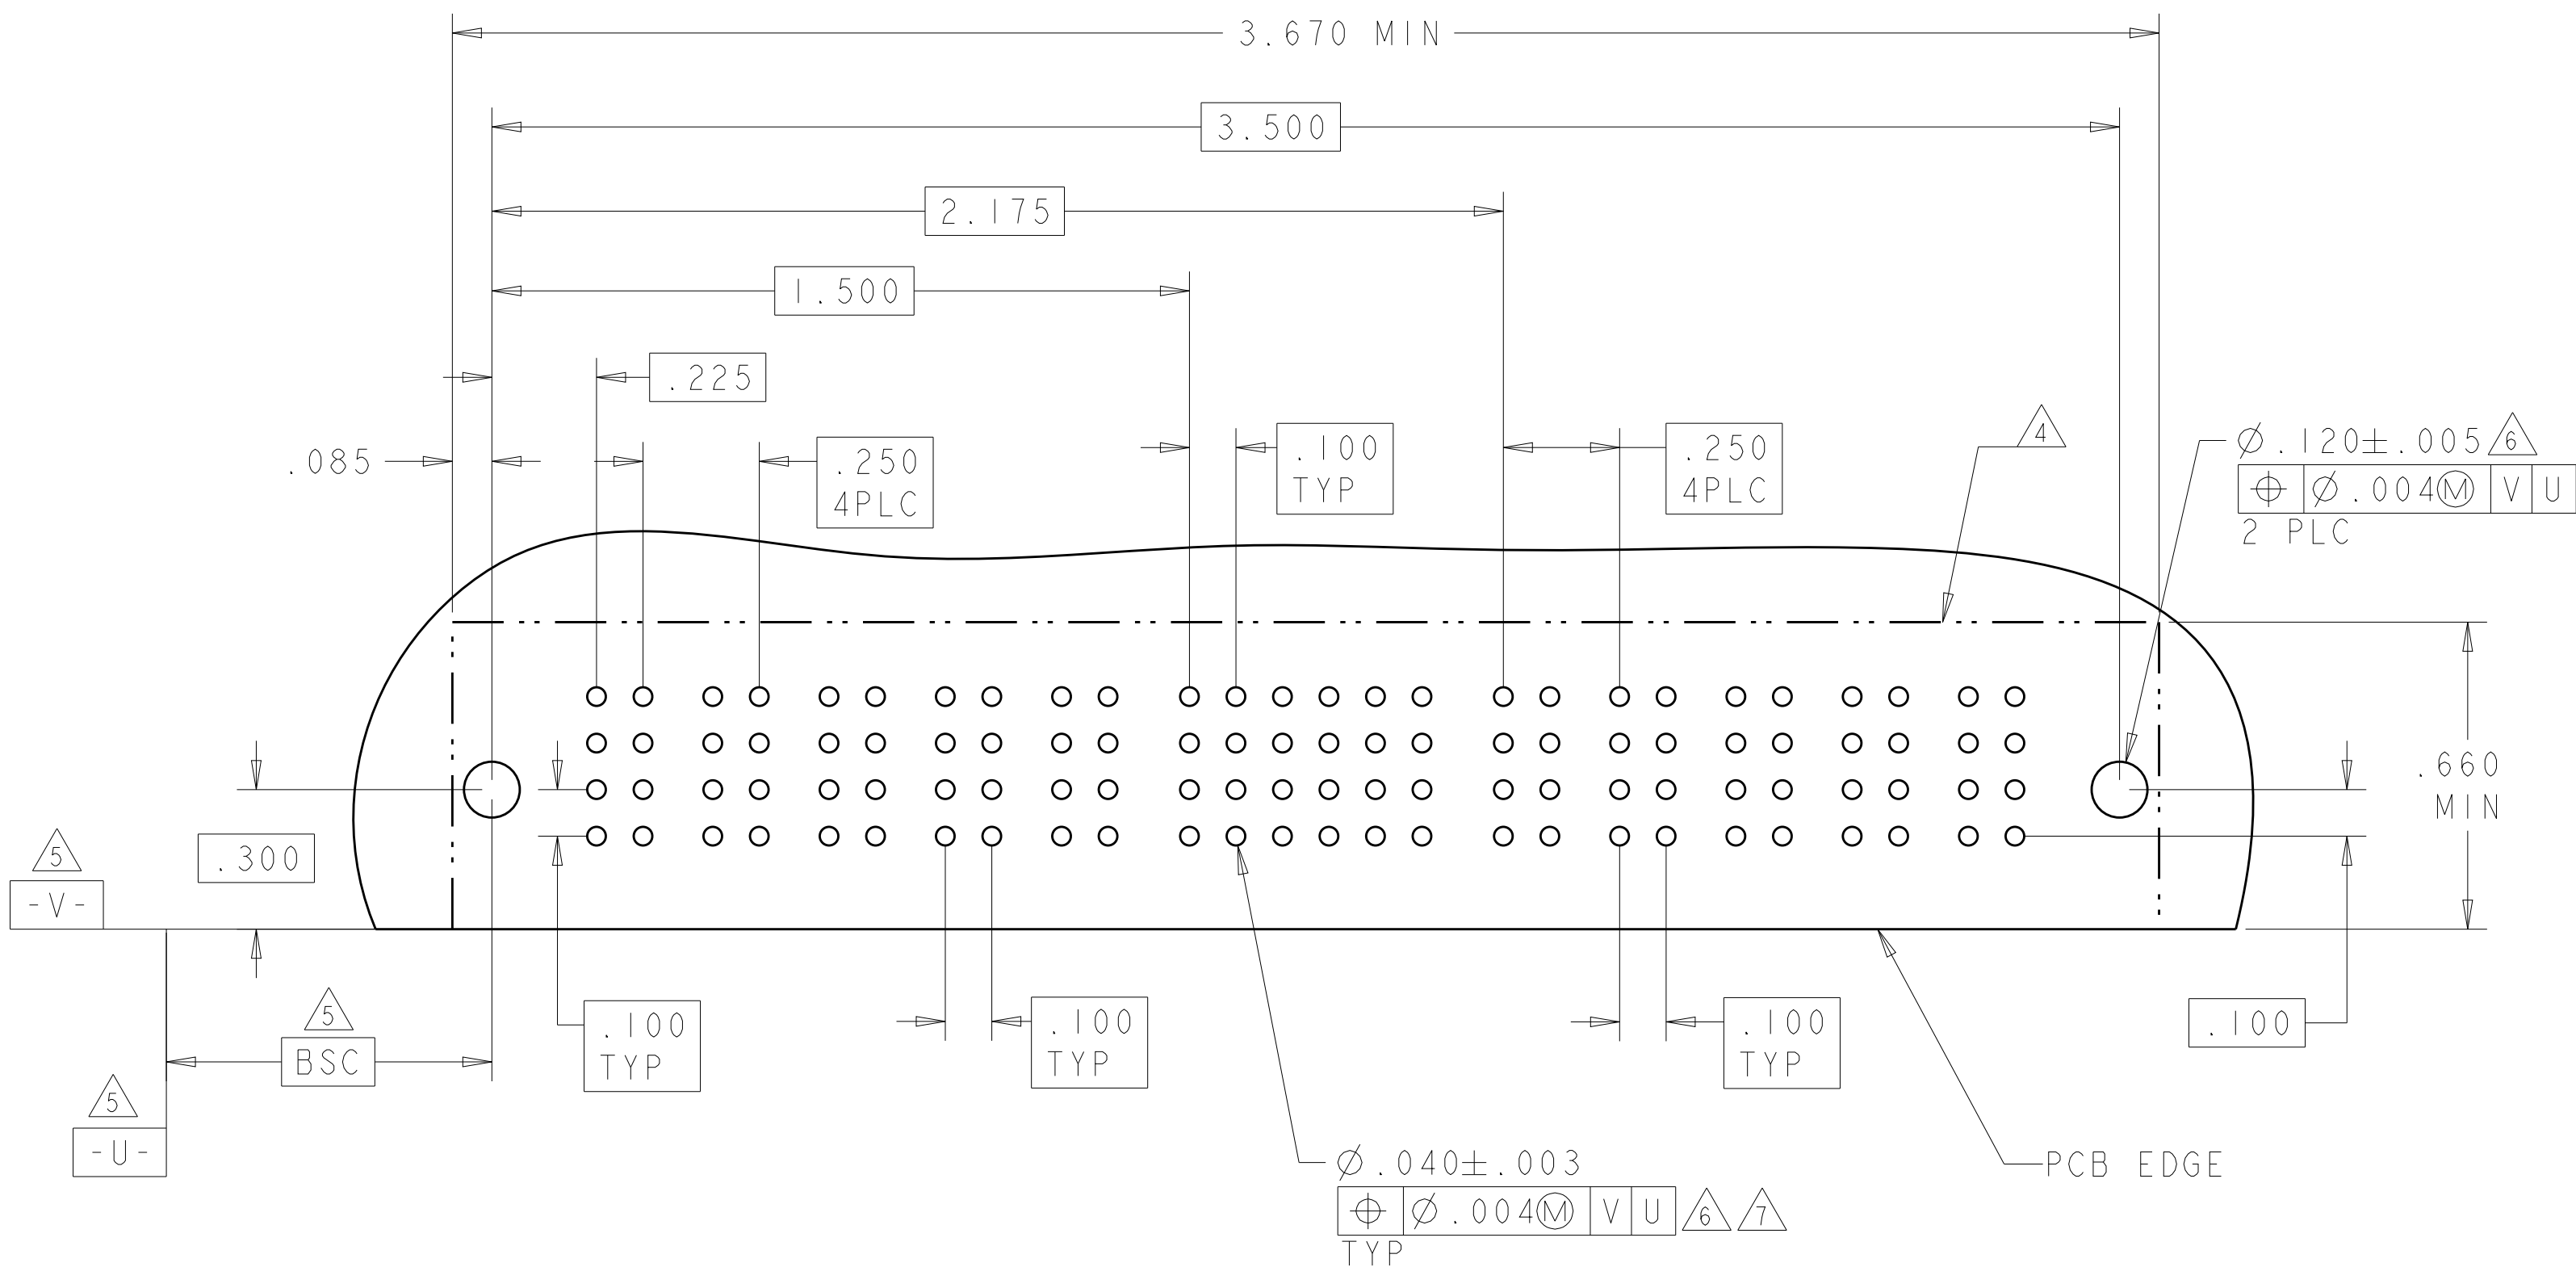
[illegible]4805 (3/11)

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-



PART NUMBER	ROWS		POWER					SIGNAL								POWER		
			P1	P2	P3	P4	P5	1	2	3	4	5	6	5	6	P6	P7	
6450830-8	D		TM	TM	TM	TM	TM	J	J	J	J	J	J	J	J	LM		
	C							K	K	K	K	K	K	K	K			
	B							N	N	N	N	N	N	N	N			
	A							S	S	S	S	S	S	S	S			
5P + 32S + 2LP																		

NO CONTACT LOADED

PART NUMBER	ROWS		POWER			SIGNAL						POWER			
			P1	P2	P3	1	2	3	4	5	6	P4	P5	P6	
6450830-9	D		TM	TM	TM	J	J	J	J	J	J	TM	TM	TM	
	K					K	K	K	K	K					
	N					N	N	N	N	N					
	S					S	S	S	S	S					
3P + 24S + 3P															

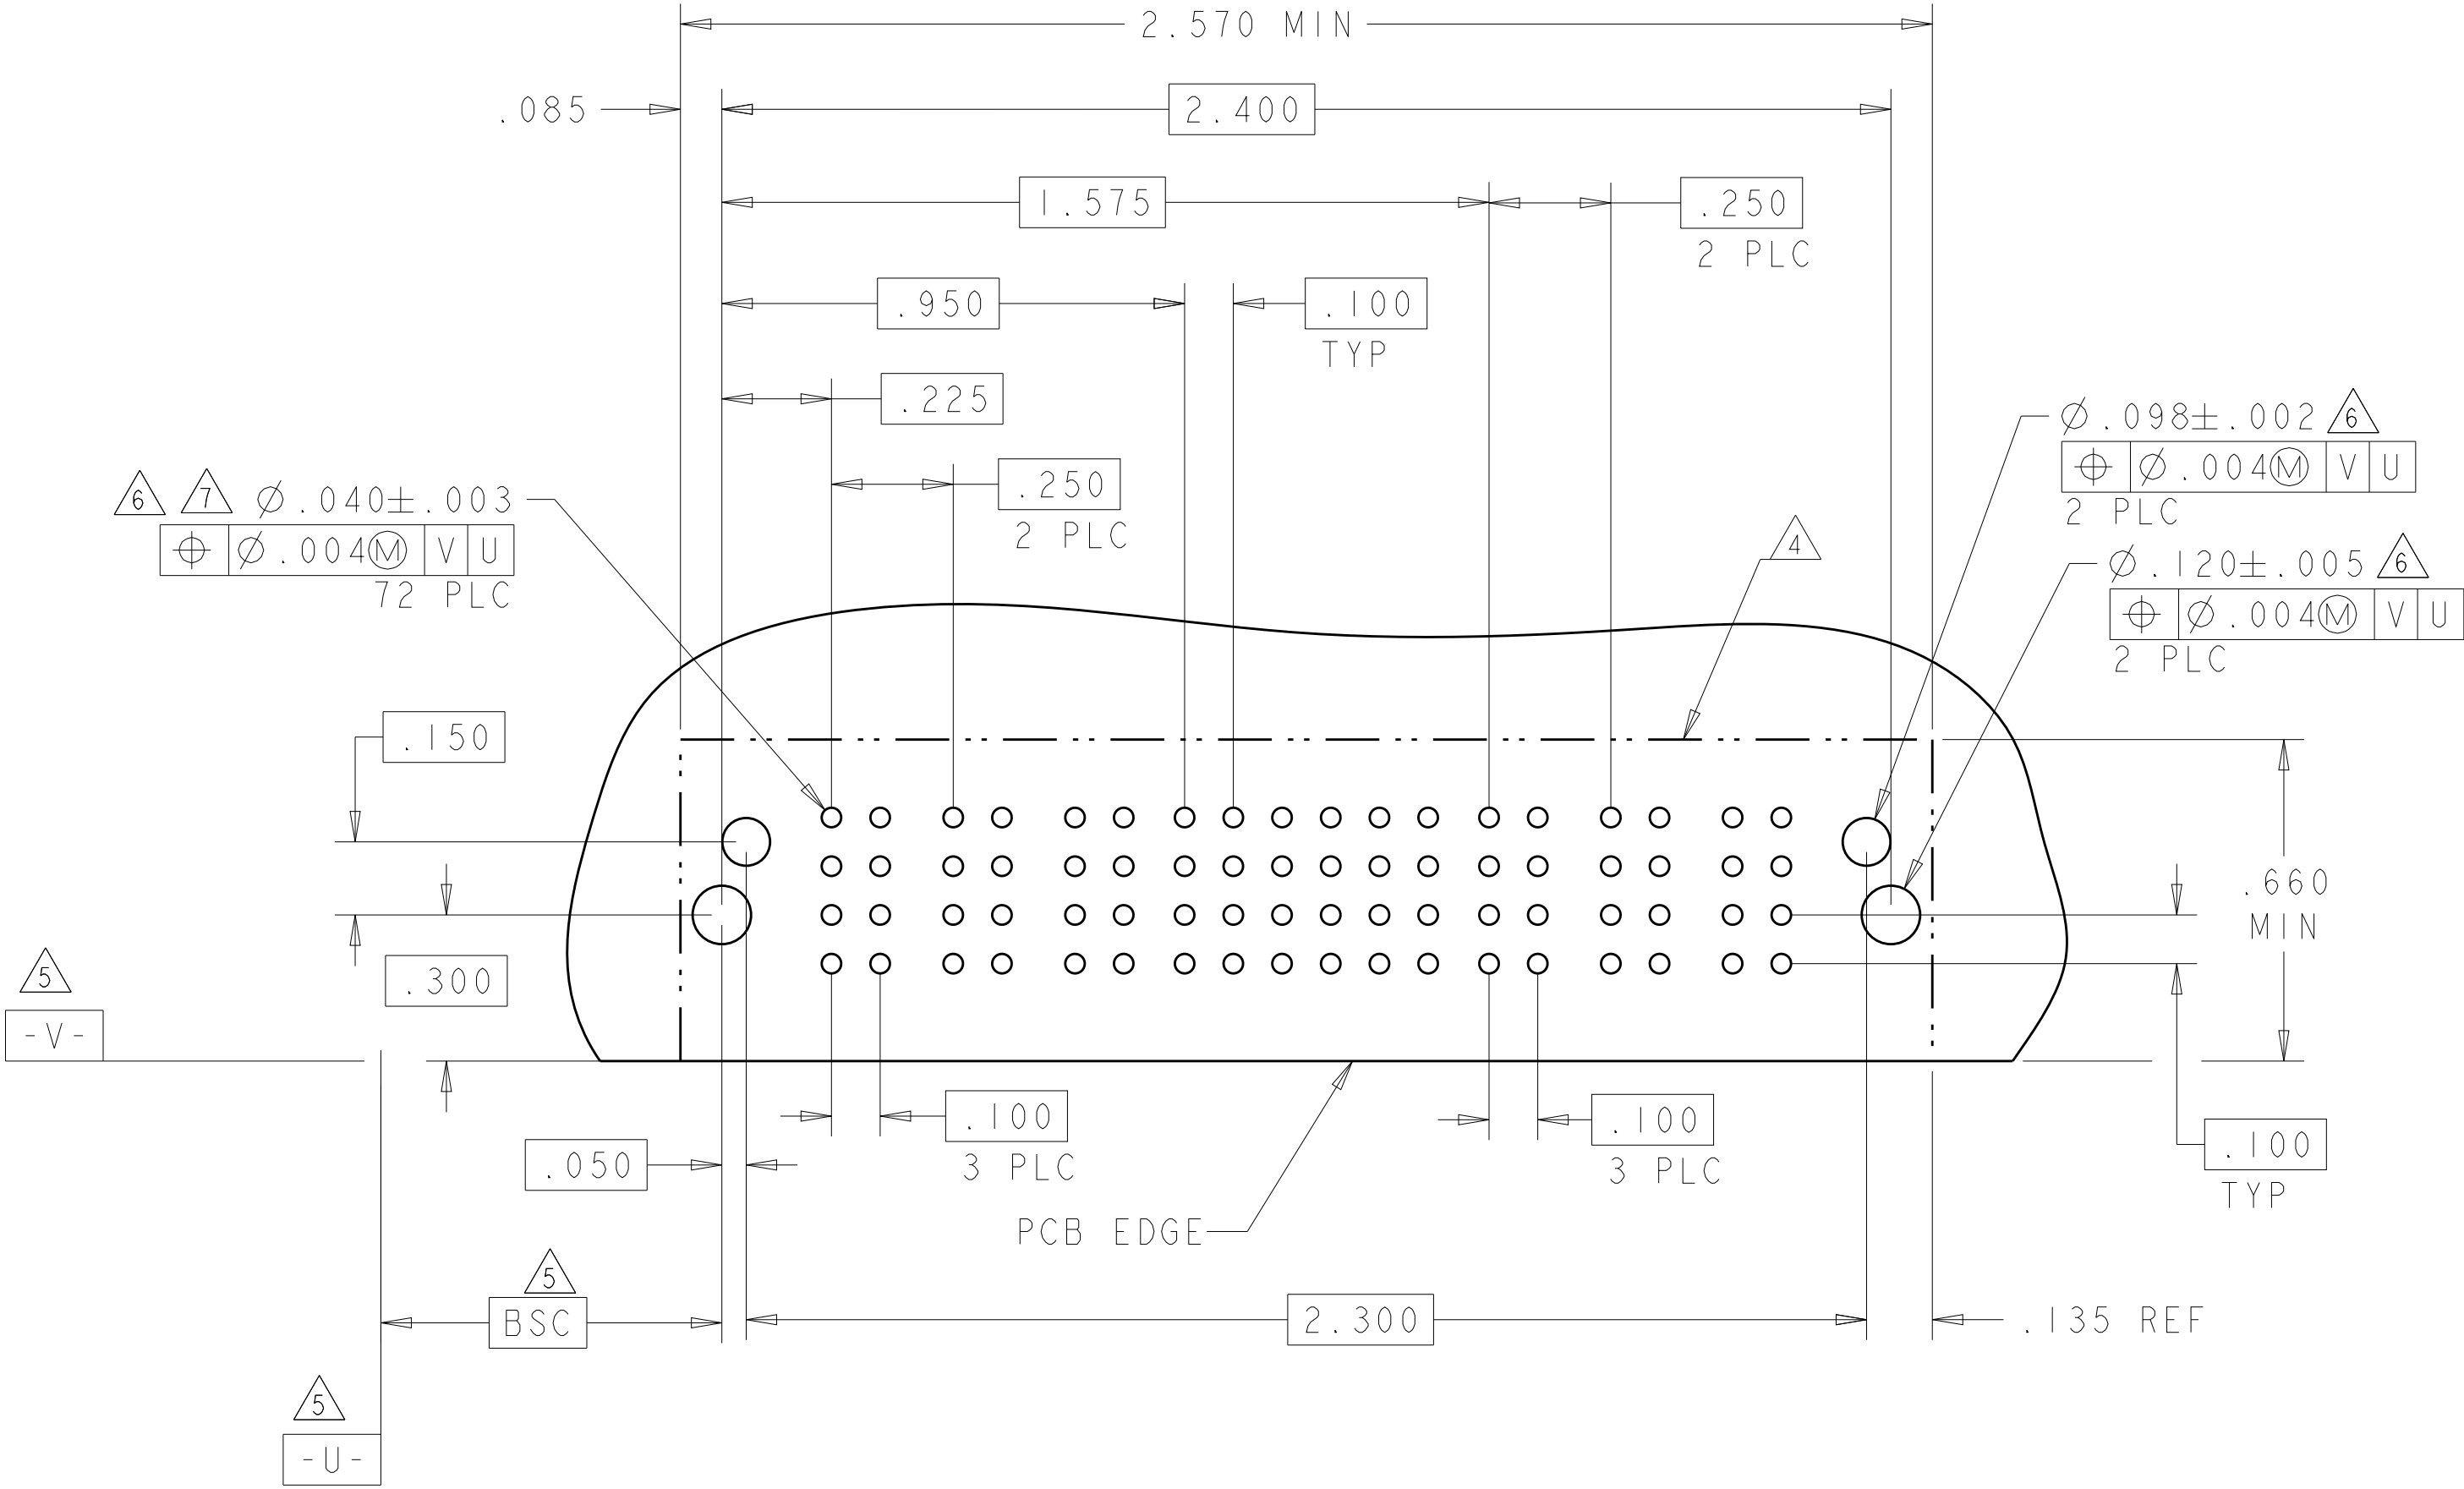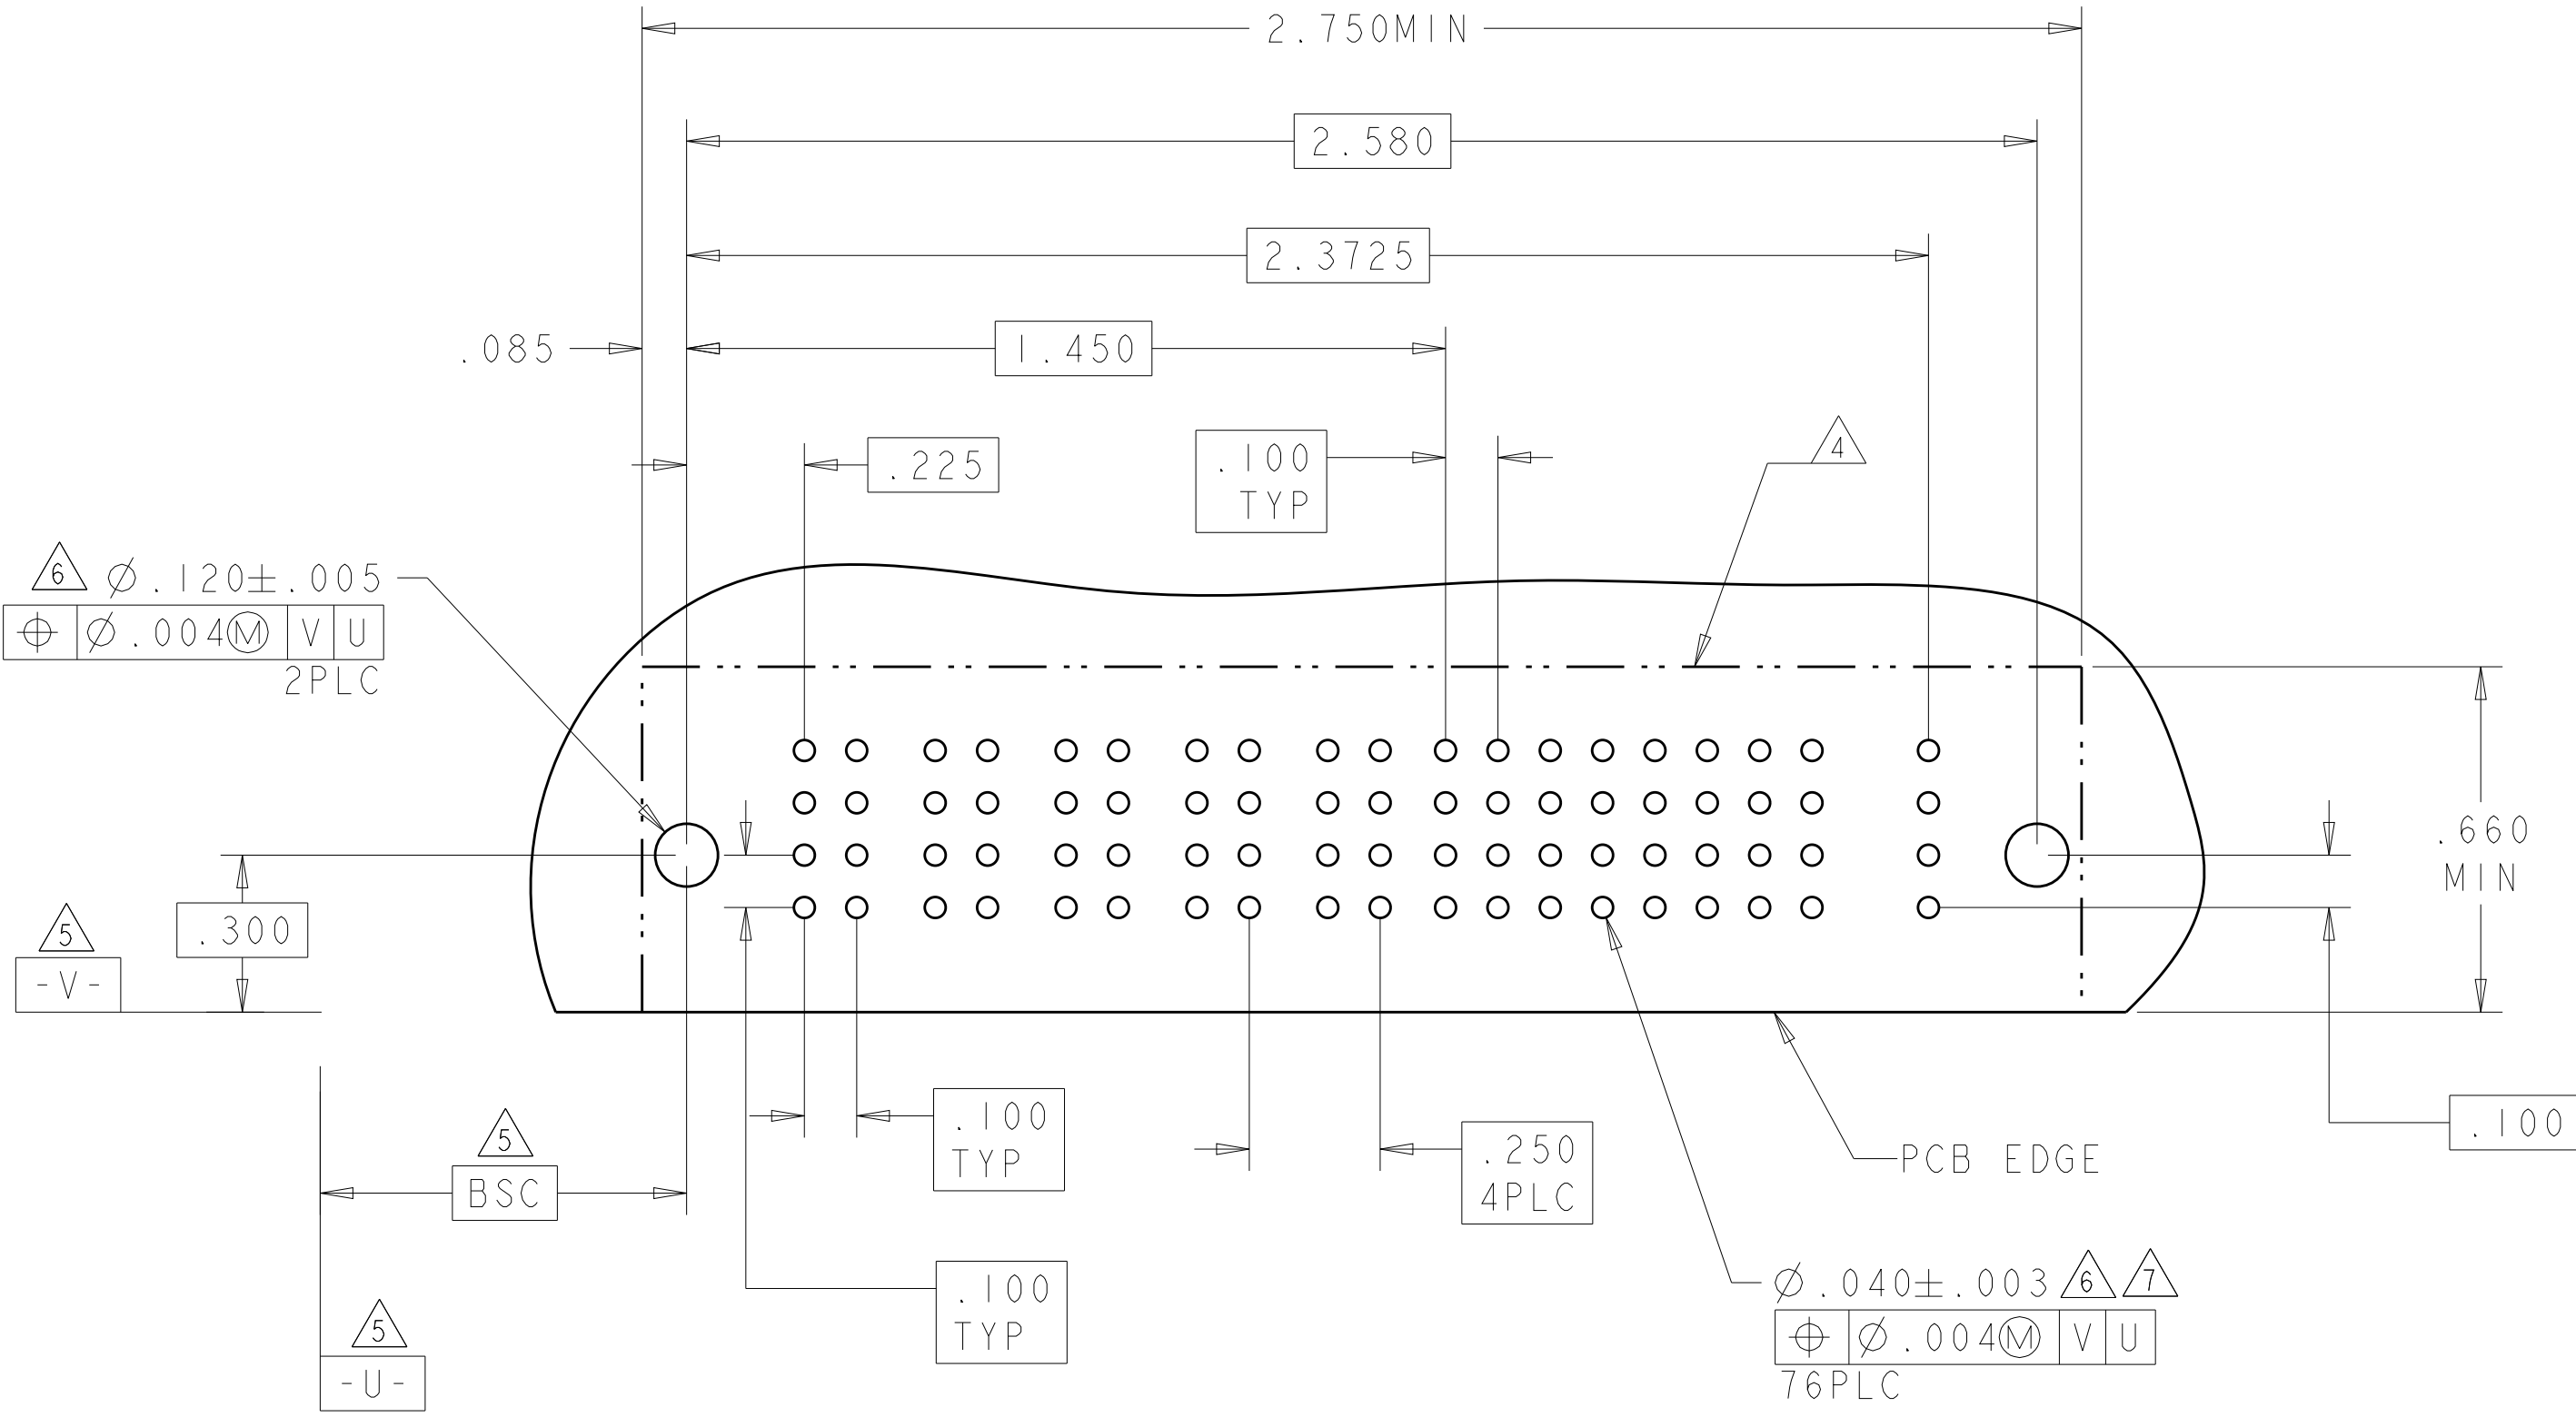

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

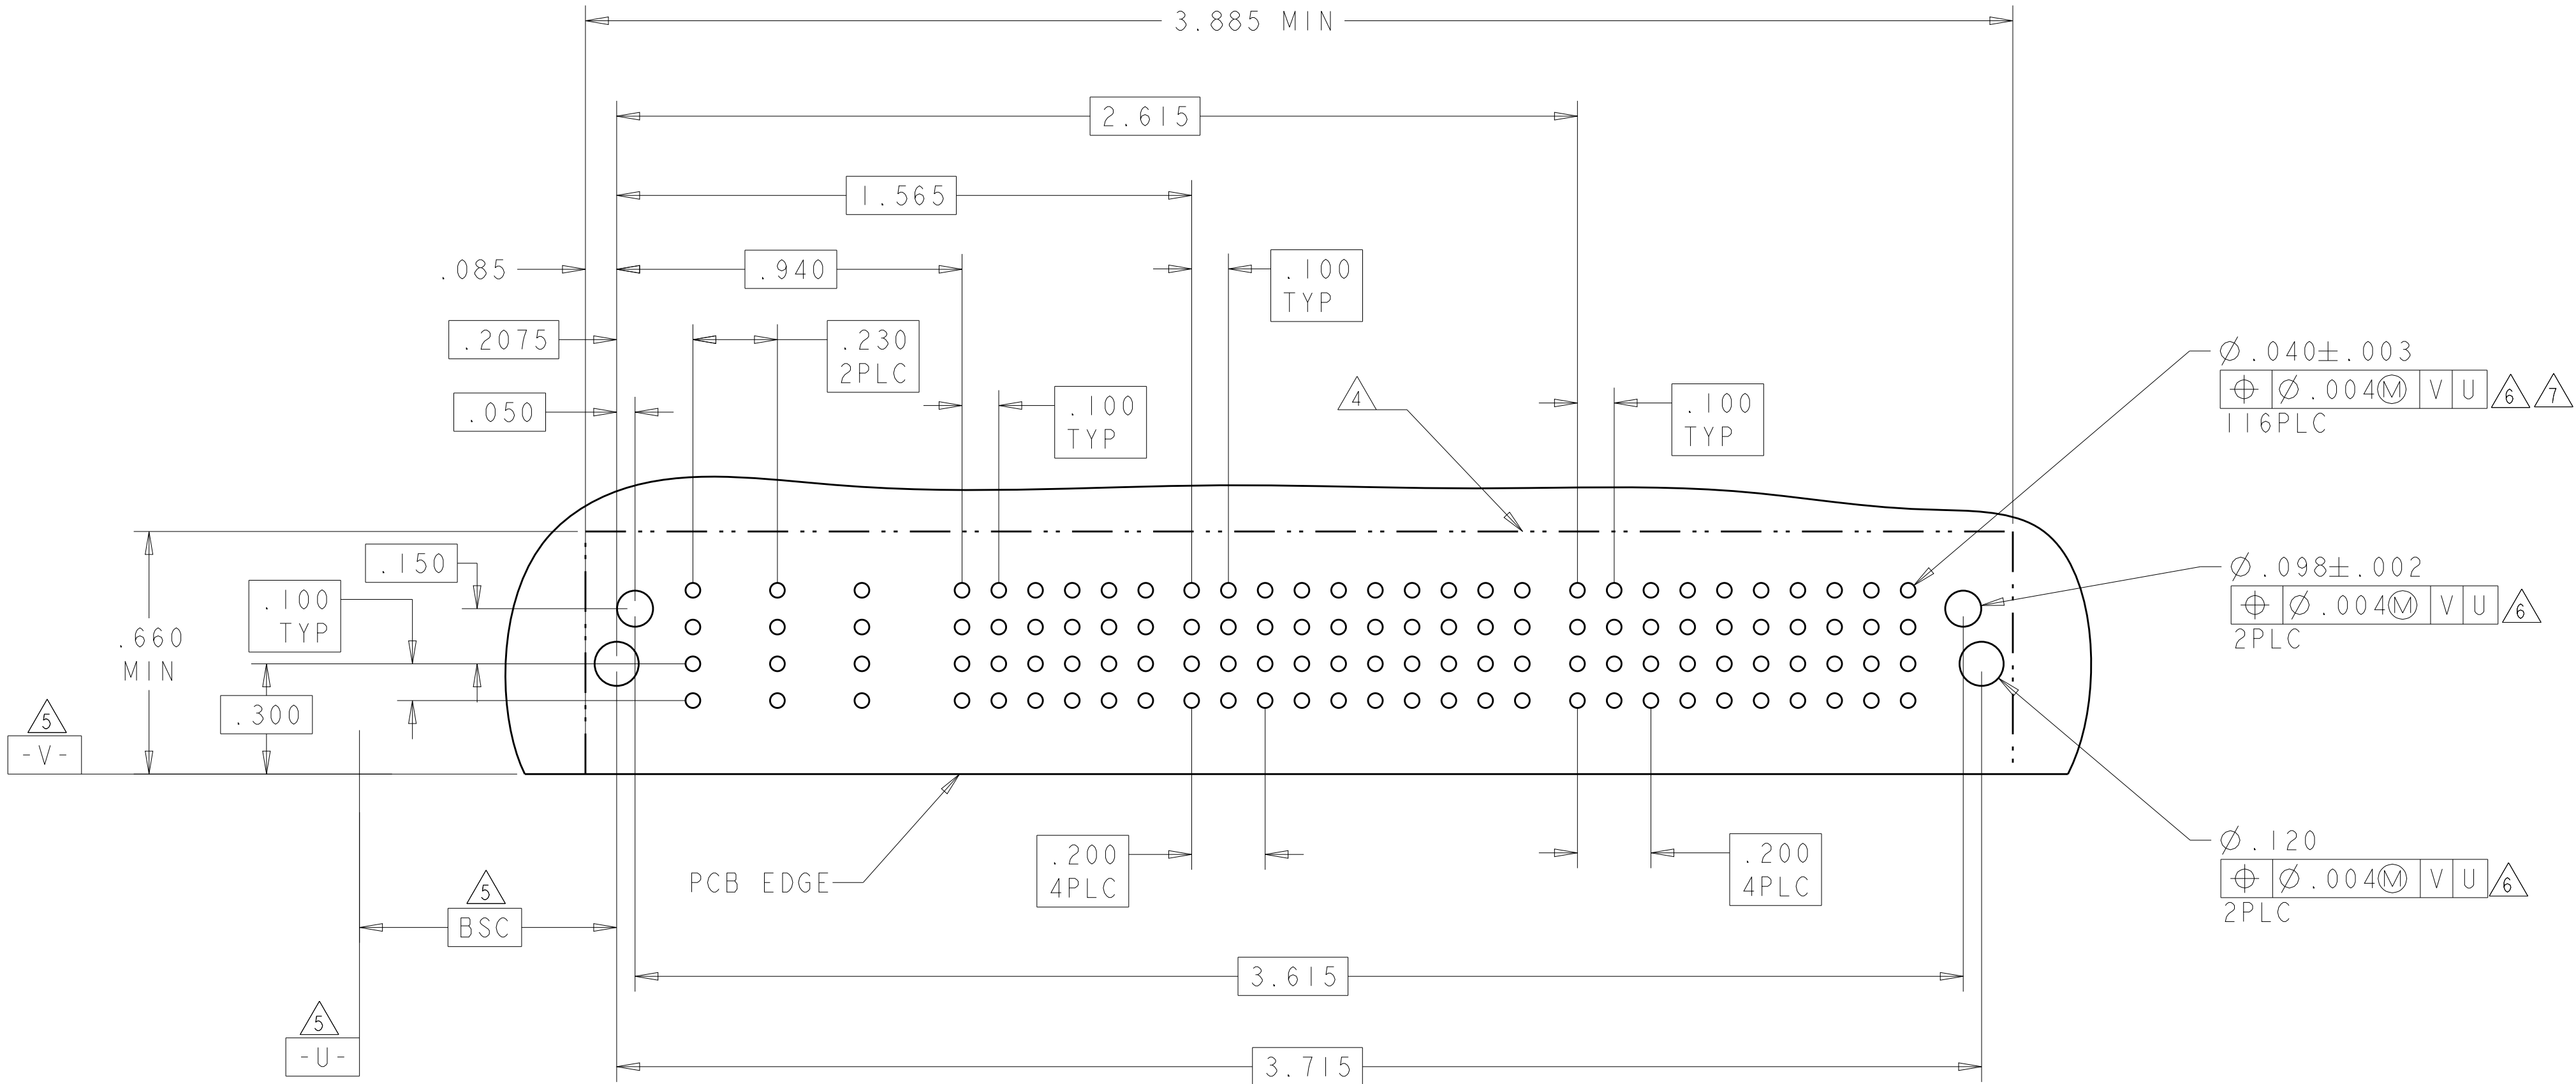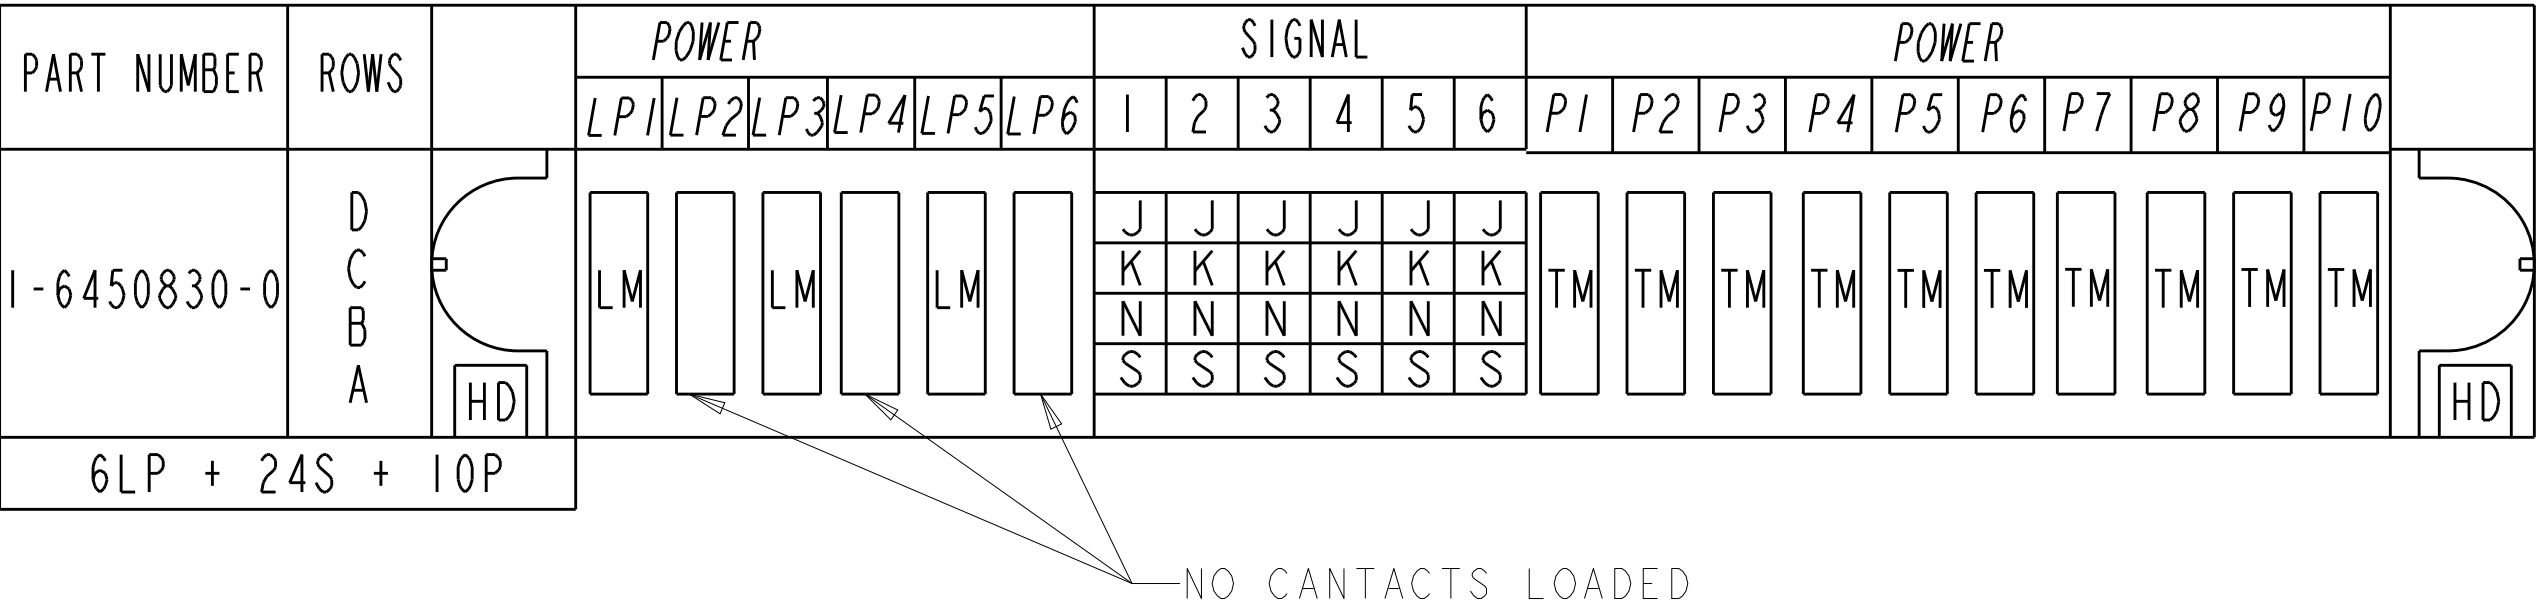

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

S.ZHAO

10APR2007

CHK

S.ZHAO

10APR2007

APVD

S.ZHAO

-

DIMENSIONS:

INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±.01

1 PLC ±.01

2 PLC ±.01

3 PLC ±.005

4 PLC ±.0020

ANGLES ±2°

FINISH -

MATERIAL

-

PRODUCT SPEC

108-2292

APPLICATION SPEC

114-13251

WEIGHT

-

CUSTOMER DRAWING

NAME

RIGHT ANGLE WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM XLE

SIZE

A1

CAGE CODE

00779

DRAWING NO

6450830

RESTRICTED TO

-

SCALE

4:1

SHEET

8

OF

42


REV

S2


TE

TE Connectivity

PART NUMBER	ROWS		POWER		SIGNAL						POWER				
			P1	P2	1	2	3	4	5	6	P3	P4	P5	P6	
I-6450830-3	D C B A					J	J	J	J	J					
						K	K	K	K	K					
						N	N	N	N	N					
						S	S	S	S	S					
2ACP + 24S + 4P															

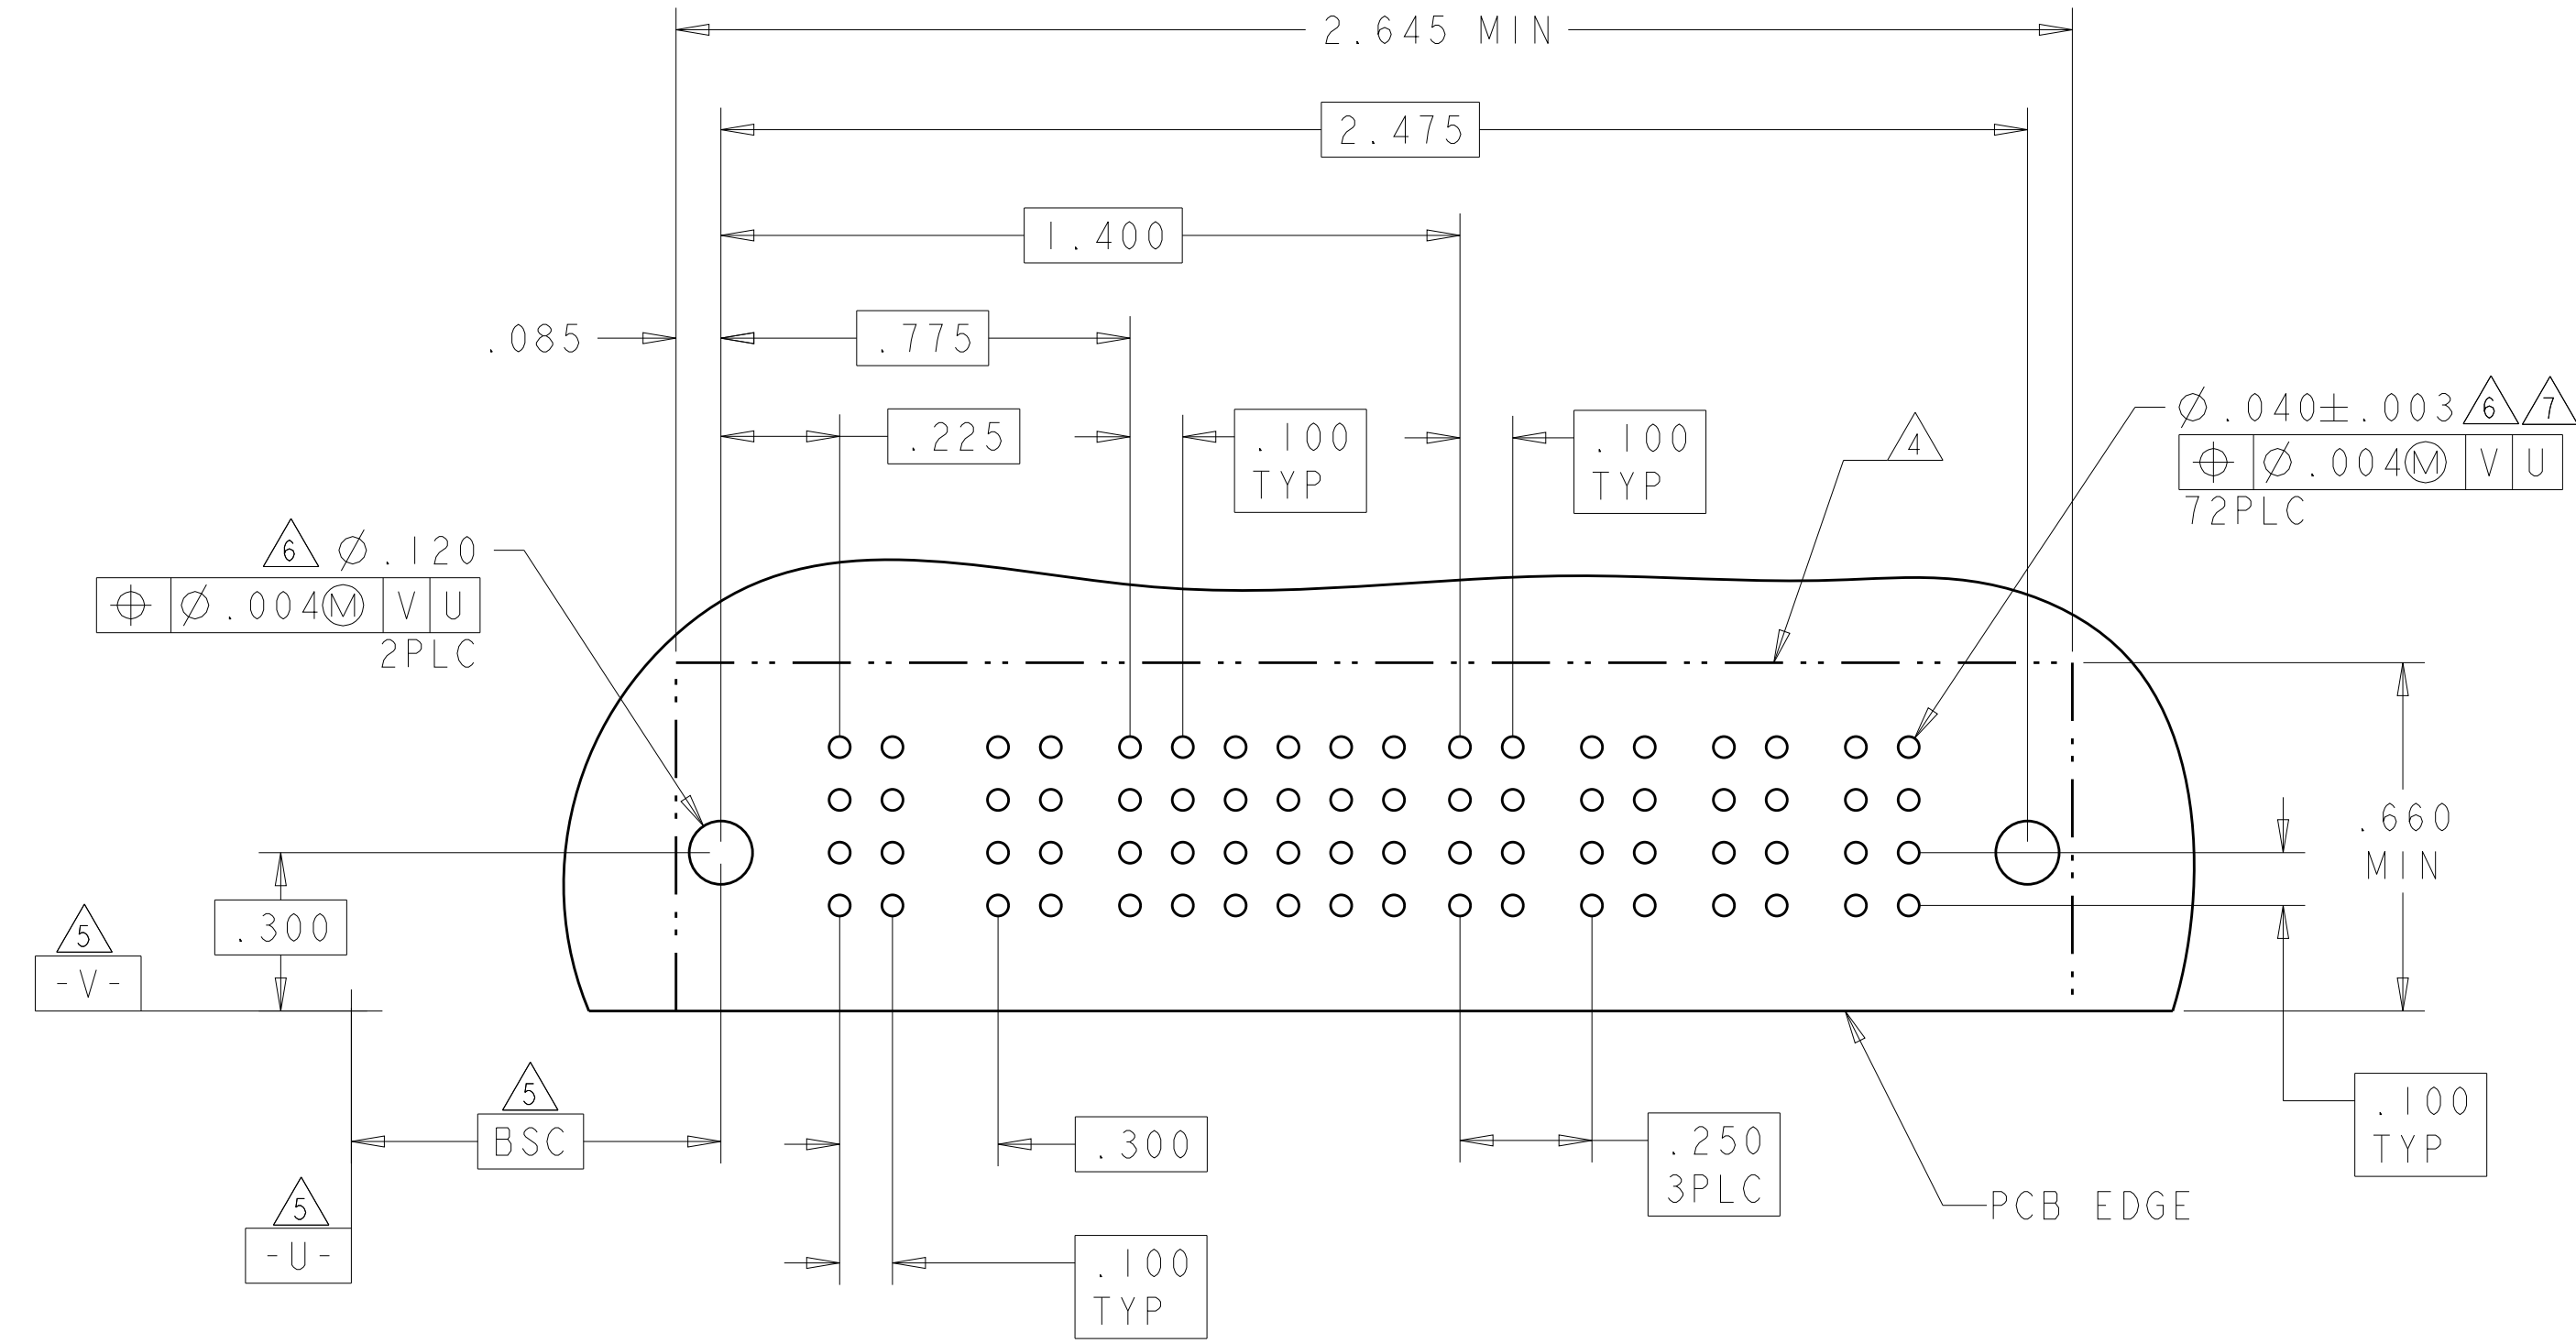

PART NUMBER	ROWS		POWER		SIGNAL						POWER		
			P1	P2	1	2	3	4	5	6	P3	P4	
I-6450830-4	D C B A				J	J	J	J	J	J			
					K	K	K	K	K	K			
					N	N	G	N	N	N			
					S	S	S	S	S	S			
2P + 24S + 2P													

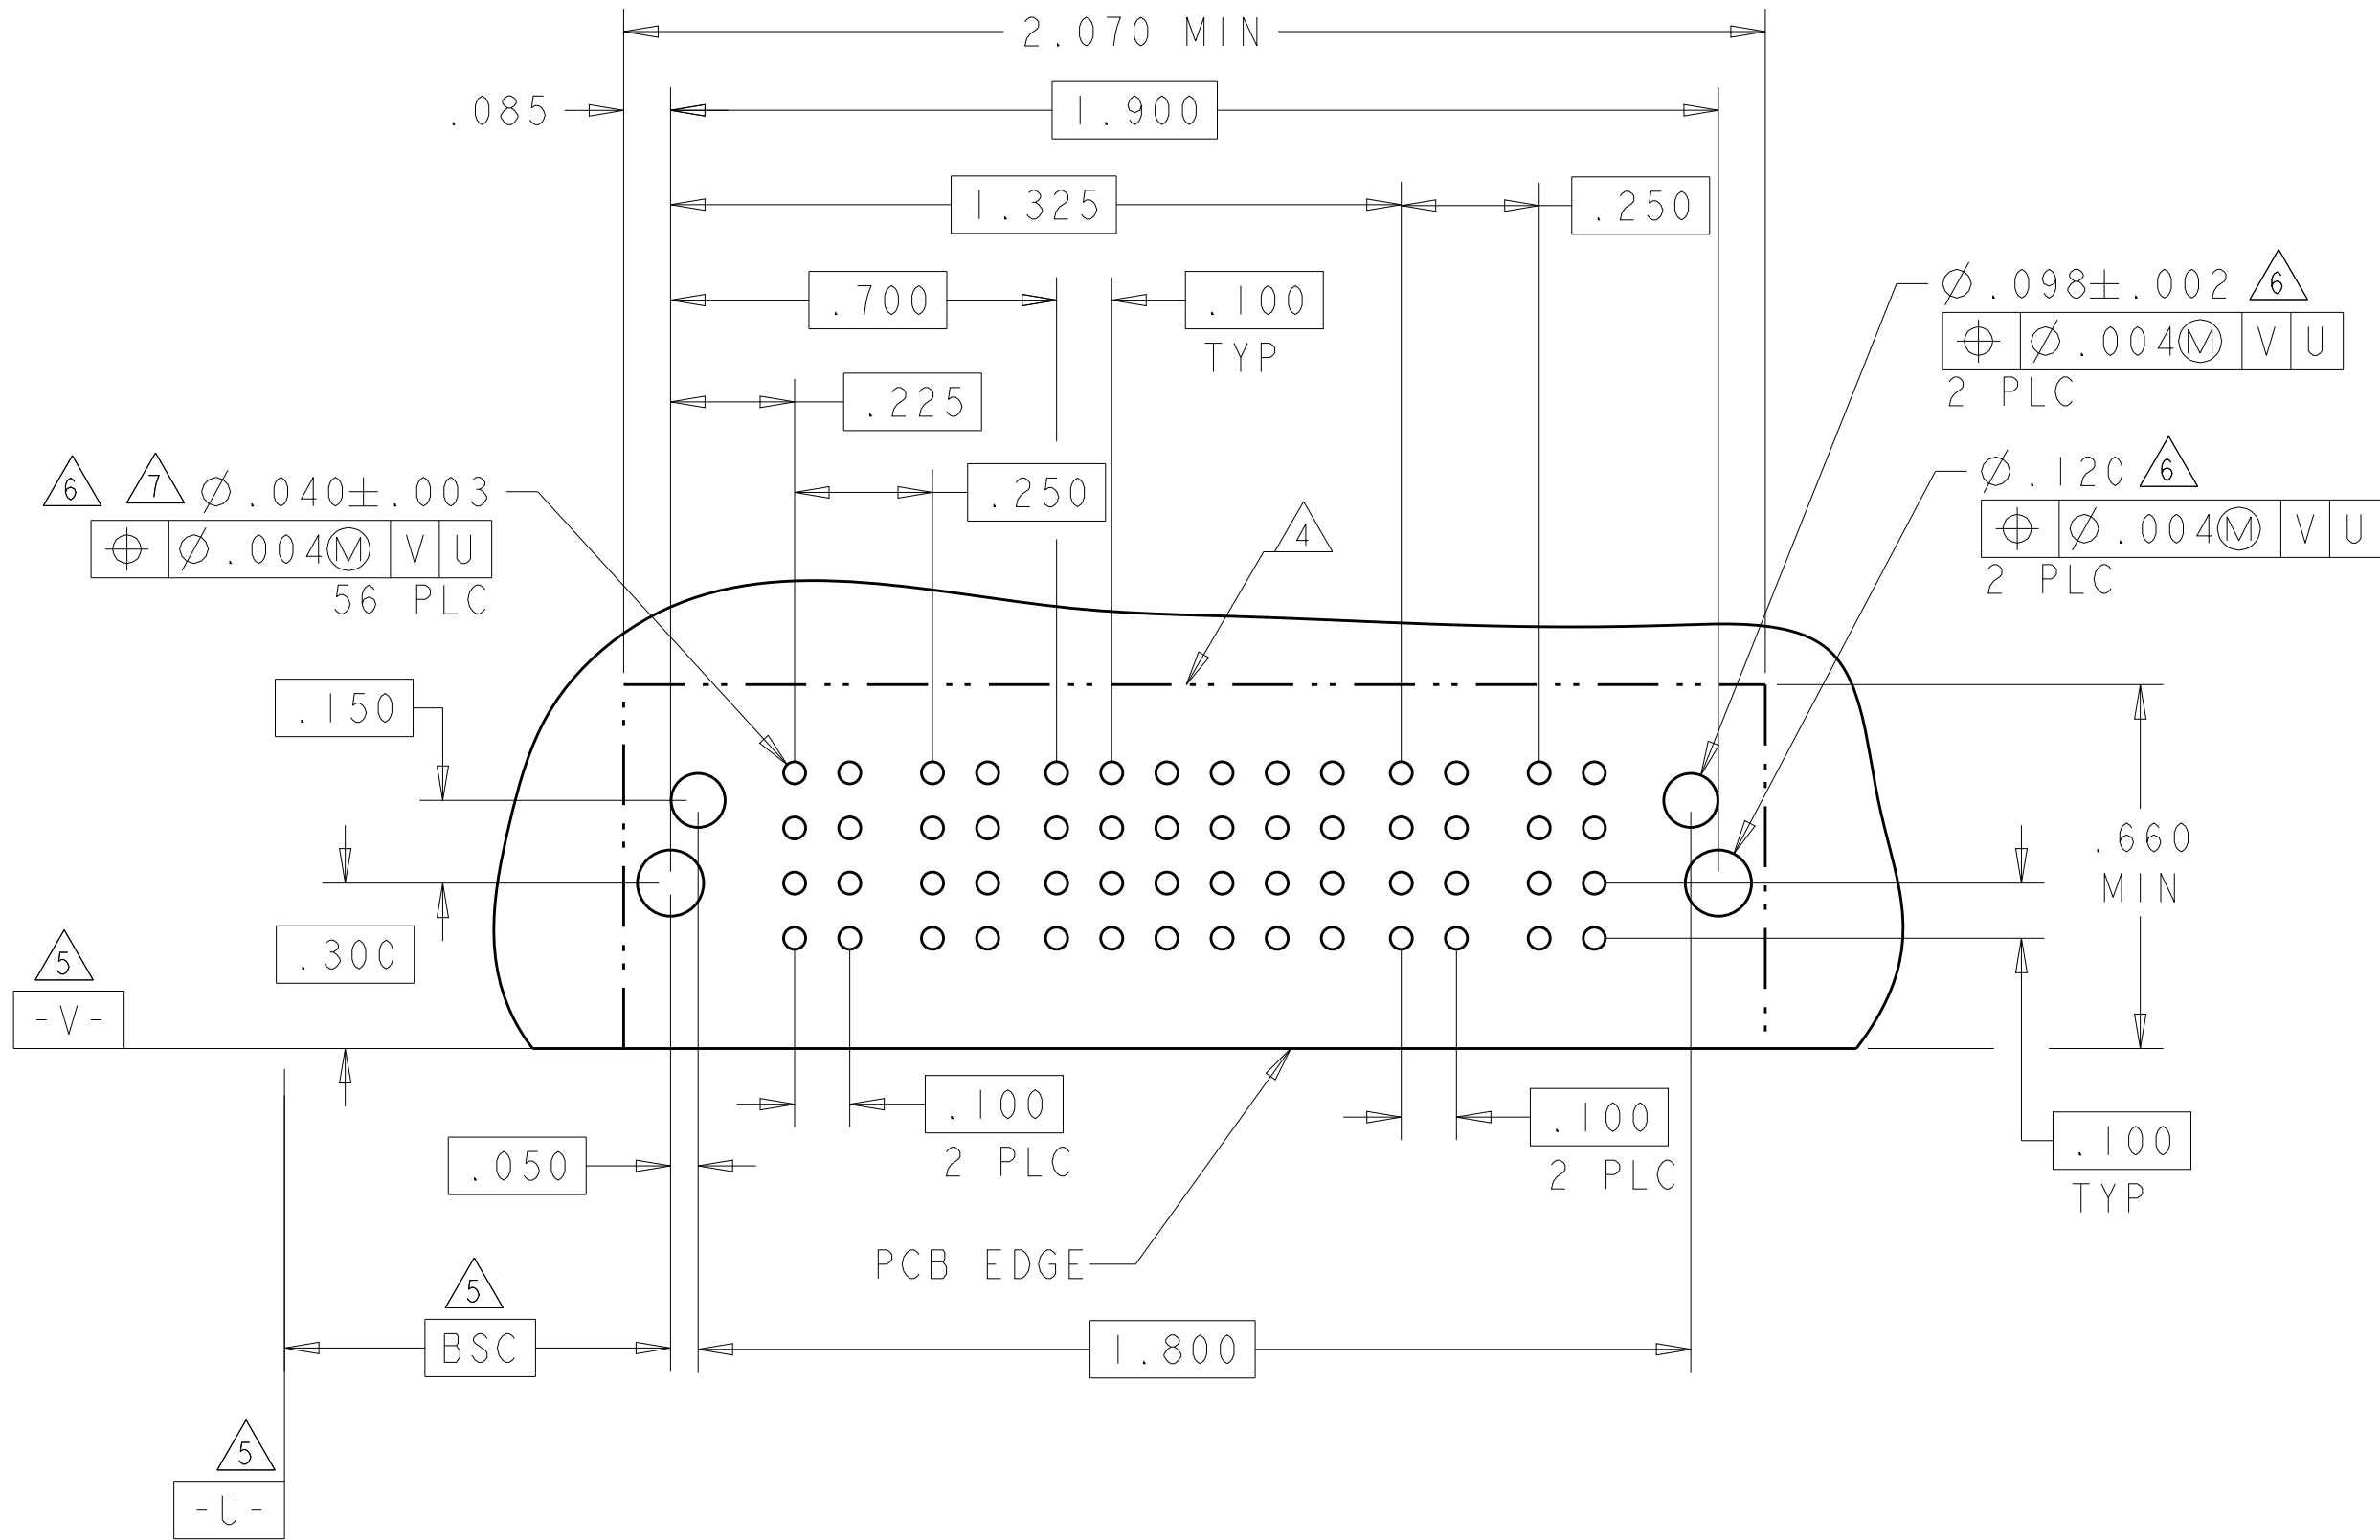


LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
ES	00	-	-	SEE SHEET 1	-	-

PART NUMBER	ROWS		POWER								SIGNAL					POWER					
			P1	P2	P3	P4	P5	P6	P7	P8	1	2	3	4	5	LP1	LP2	LP3	LP4	LP5	
I-6450830-2	D C B A		TM	TM	TM	TM	TM	TM	TM	J	J	J	J	J	LMF		LM		LM		
										K	K	K	K	K							
										N	N	N	N	N							
8HDP + 20S + 5LP											S	S	S	S	S						HD


.250
6 PLC

.200
6 PLC

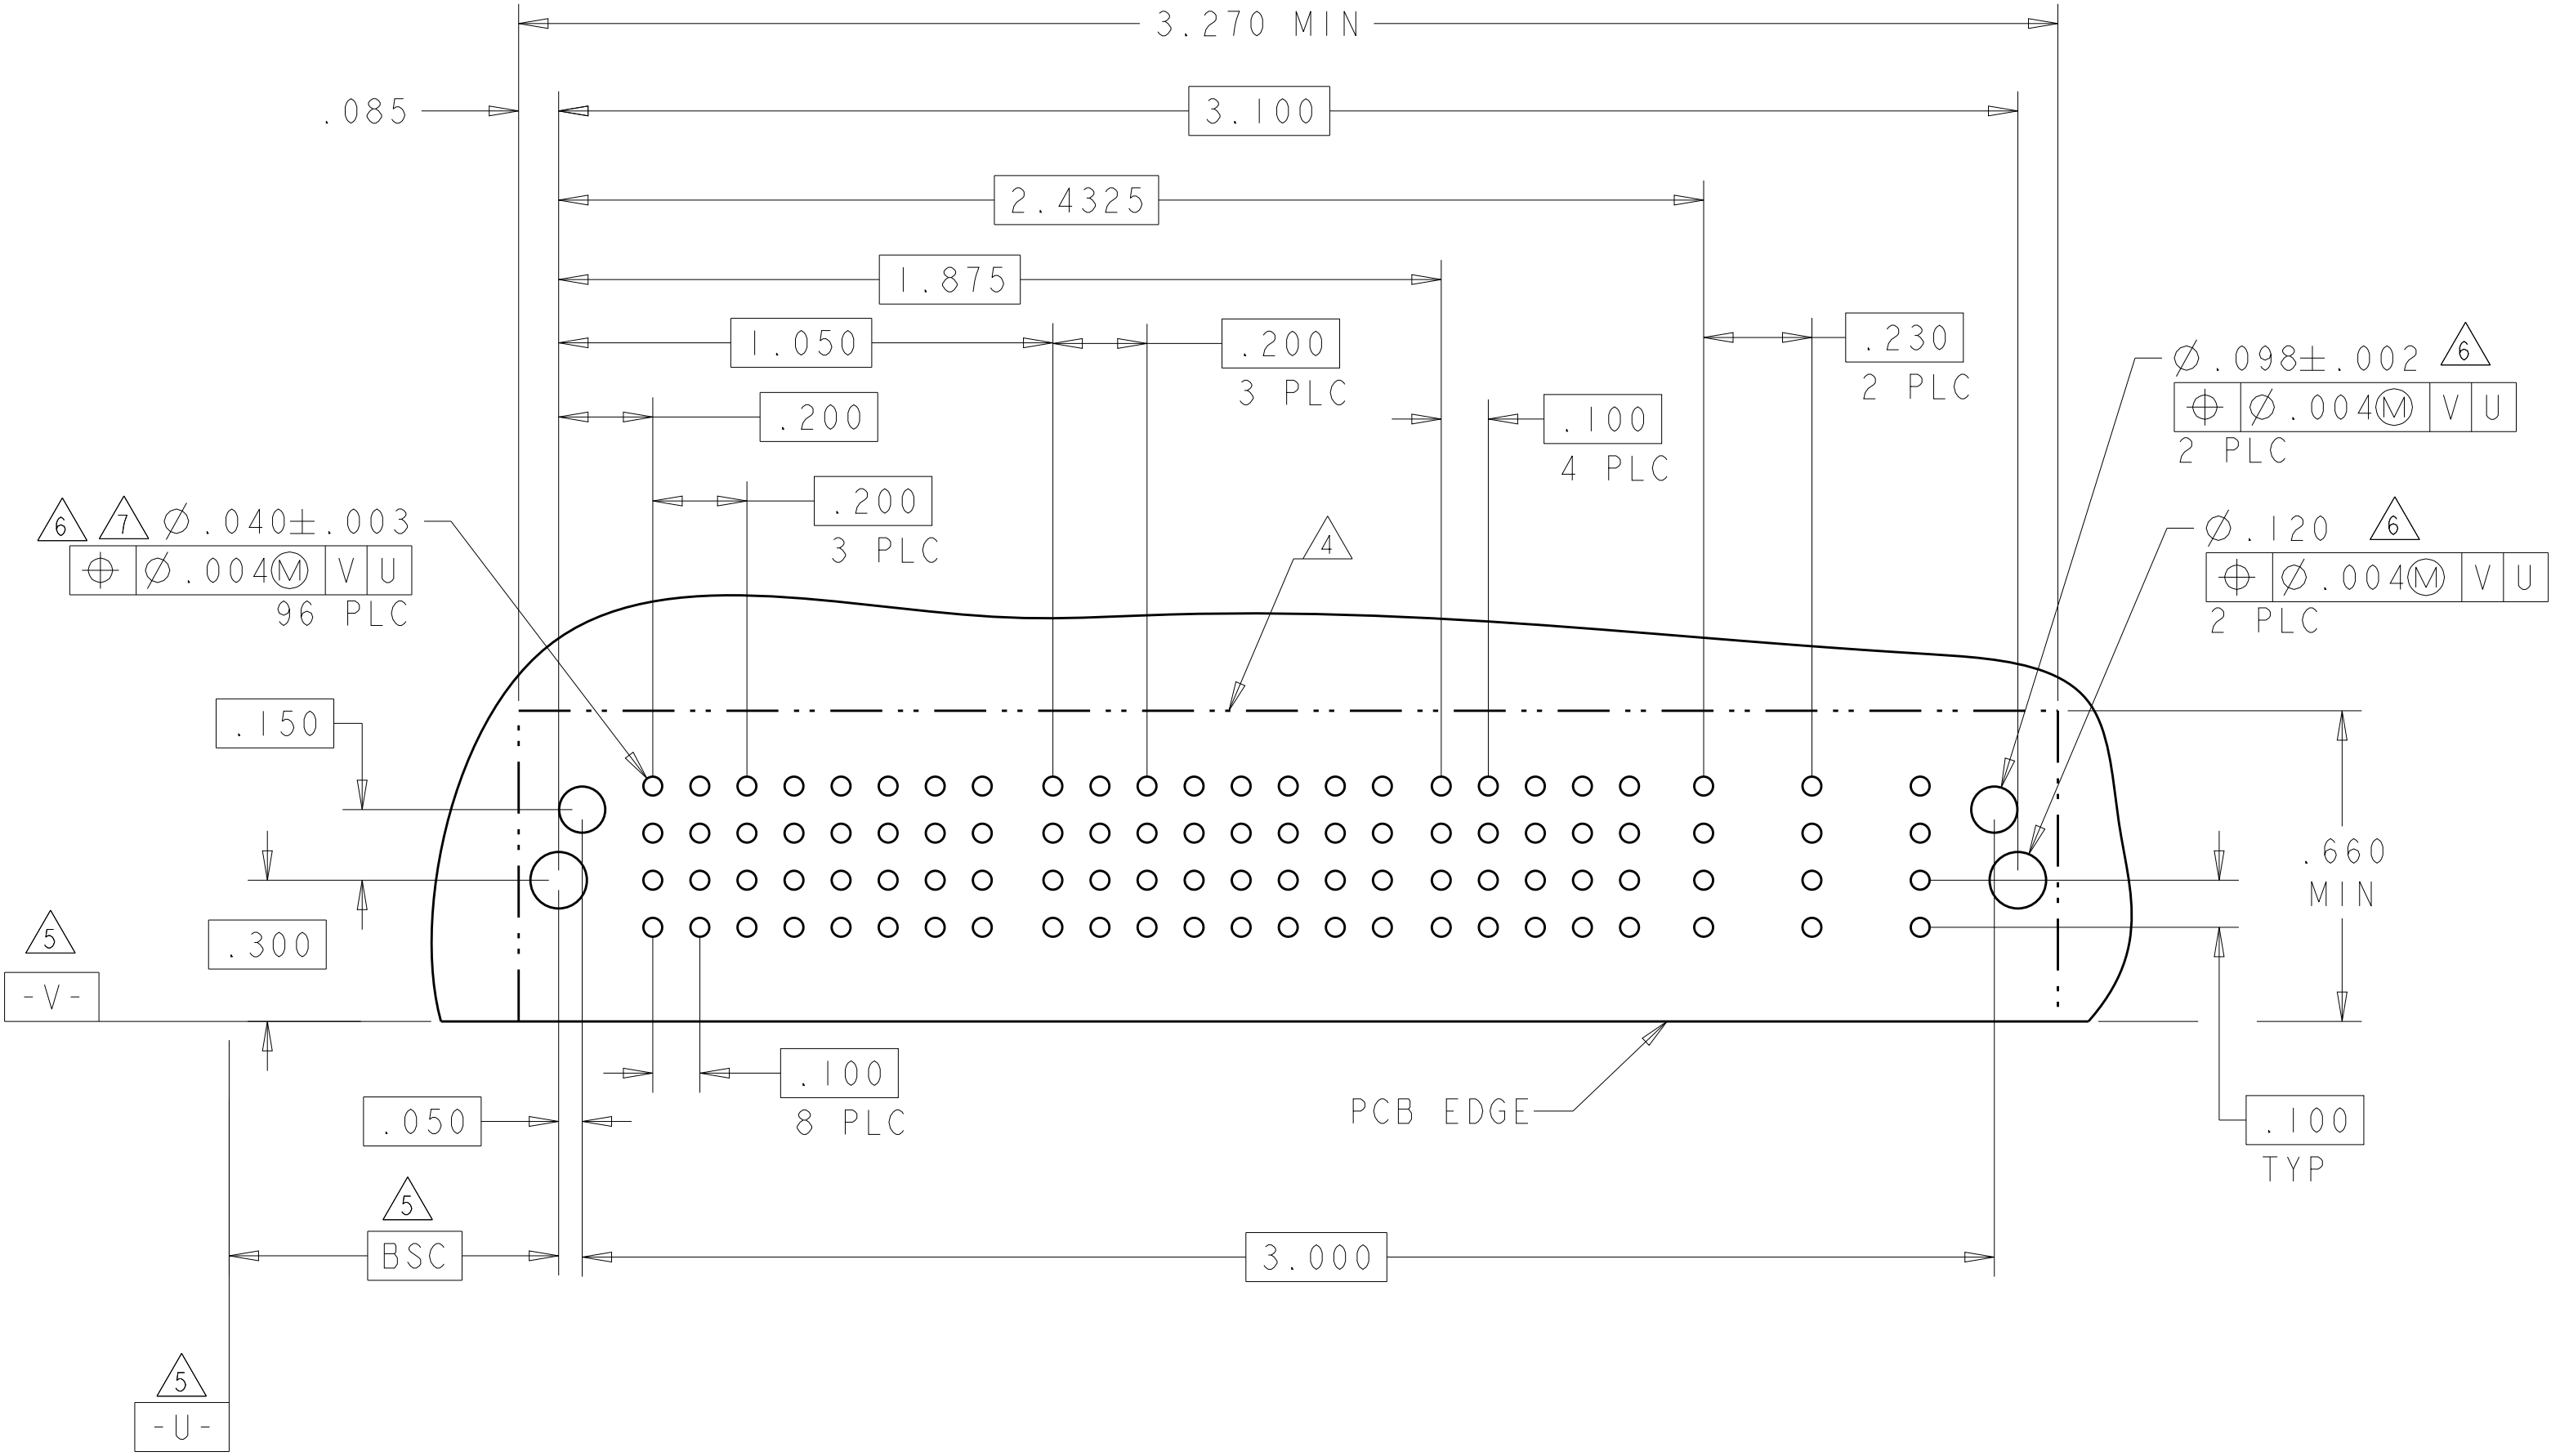


PART NUMBER	ROWS		POWER				SIGNAL							POWER			
			P1	P2	P3	P4	1	2	3	4	5	6	7	P5	P6	P7	
I-6450830-5	D C B A	 HD	TM	TM	TM	TM	J	J	J	J	J			TM	TM	 HD	
							K	K	K	K	K						
							N	N	N	N	N						
							S	S	S	S	S						
4P + 28S + 3ACP																	

NO CONTACTS LOADED

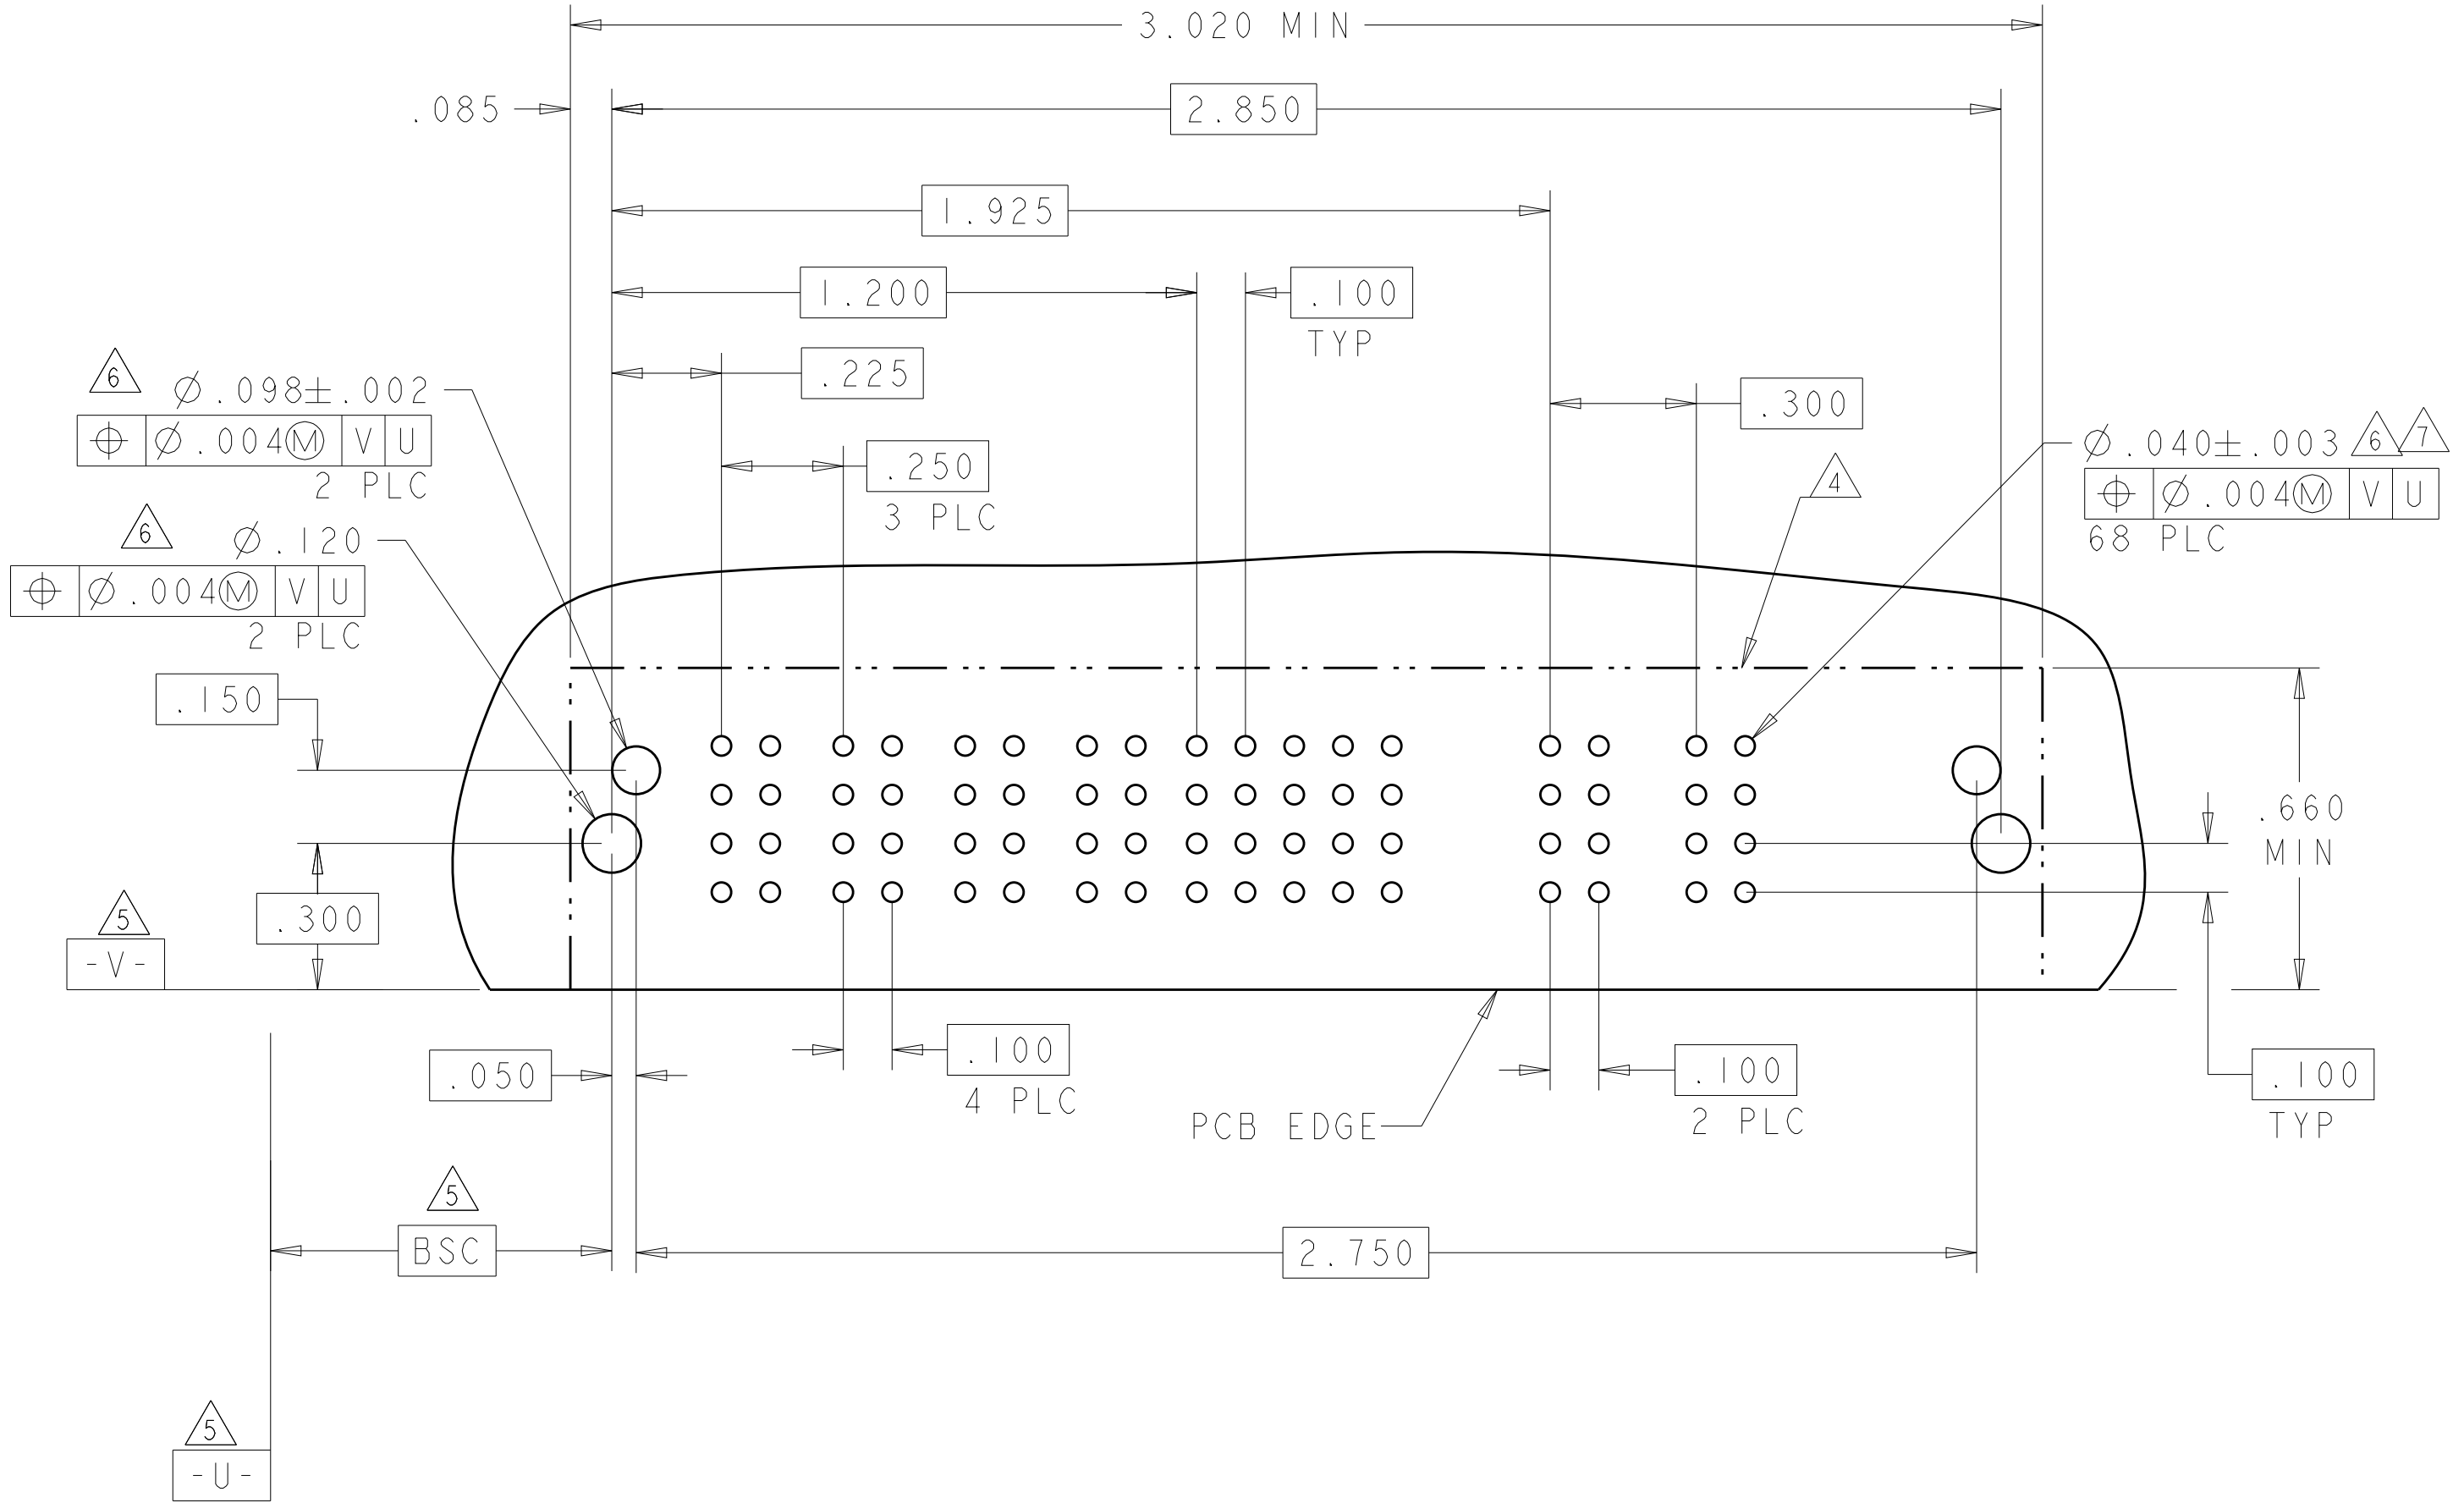


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S.ZHAO	10APR2007			NAME RIGHT ANGLE WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM XLE	
DIMENSIONS: INCHES		CHK S.ZHAO	10APR2007				
		TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC		SIZE A1	
		0 PLC ±.01 1 PLC ±.01 2 PLC ±.01 3 PLC ±.005 4 PLC ±.002 ANGLES ±.020 FINISH #2		APPLICATION SPEC		CAGE CODE 100779	
MATERIAL		WEIGHT		DRAWING NO		RESTRICTED TO	
-		-		114-13251		S2	
CUSTOMER DRAWING		SCALE		SHEET		REV	
		4:1		10		S2	

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
ES	00	-	-	SEE SHEET 1	-	-

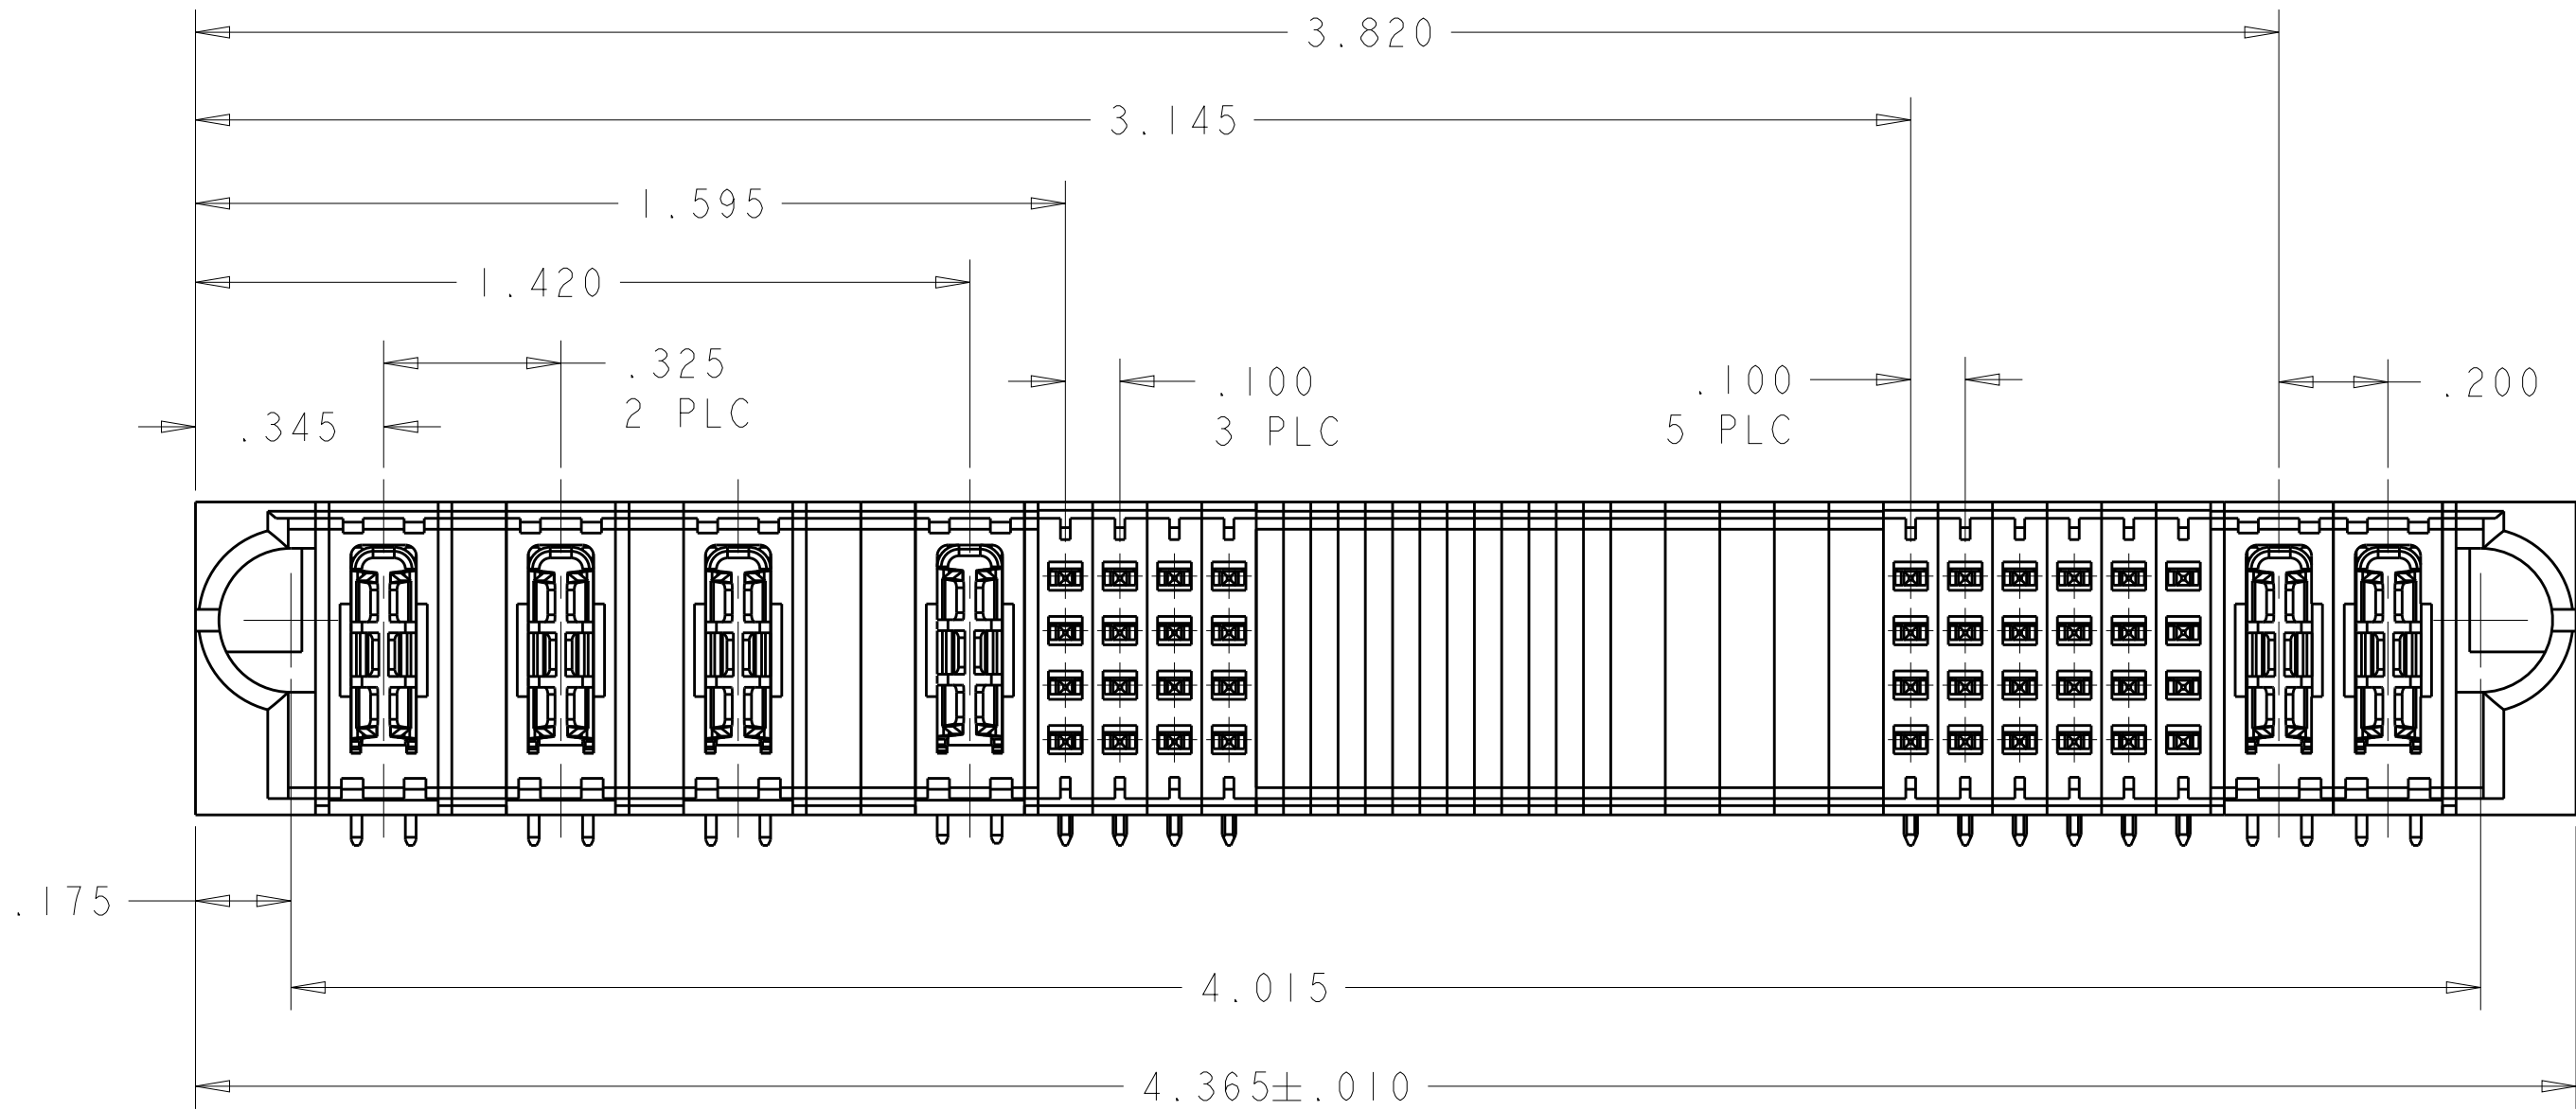

PART NUMBER: 1-6450830-8


PART NUMBER	ROWS		POWER				SIGNAL				BLANK	SIGNAL						POWER													
			P1	P2	P3	P4	1	2	3	4		5	6	7	8	9	10	P5	P6												
1-6450830-8	D	C	B	A	TM	TM	TM	TM	J	K	N	S	J	K	N	S	TM	TM													
4P + 16S + 24S + 2HDP																															

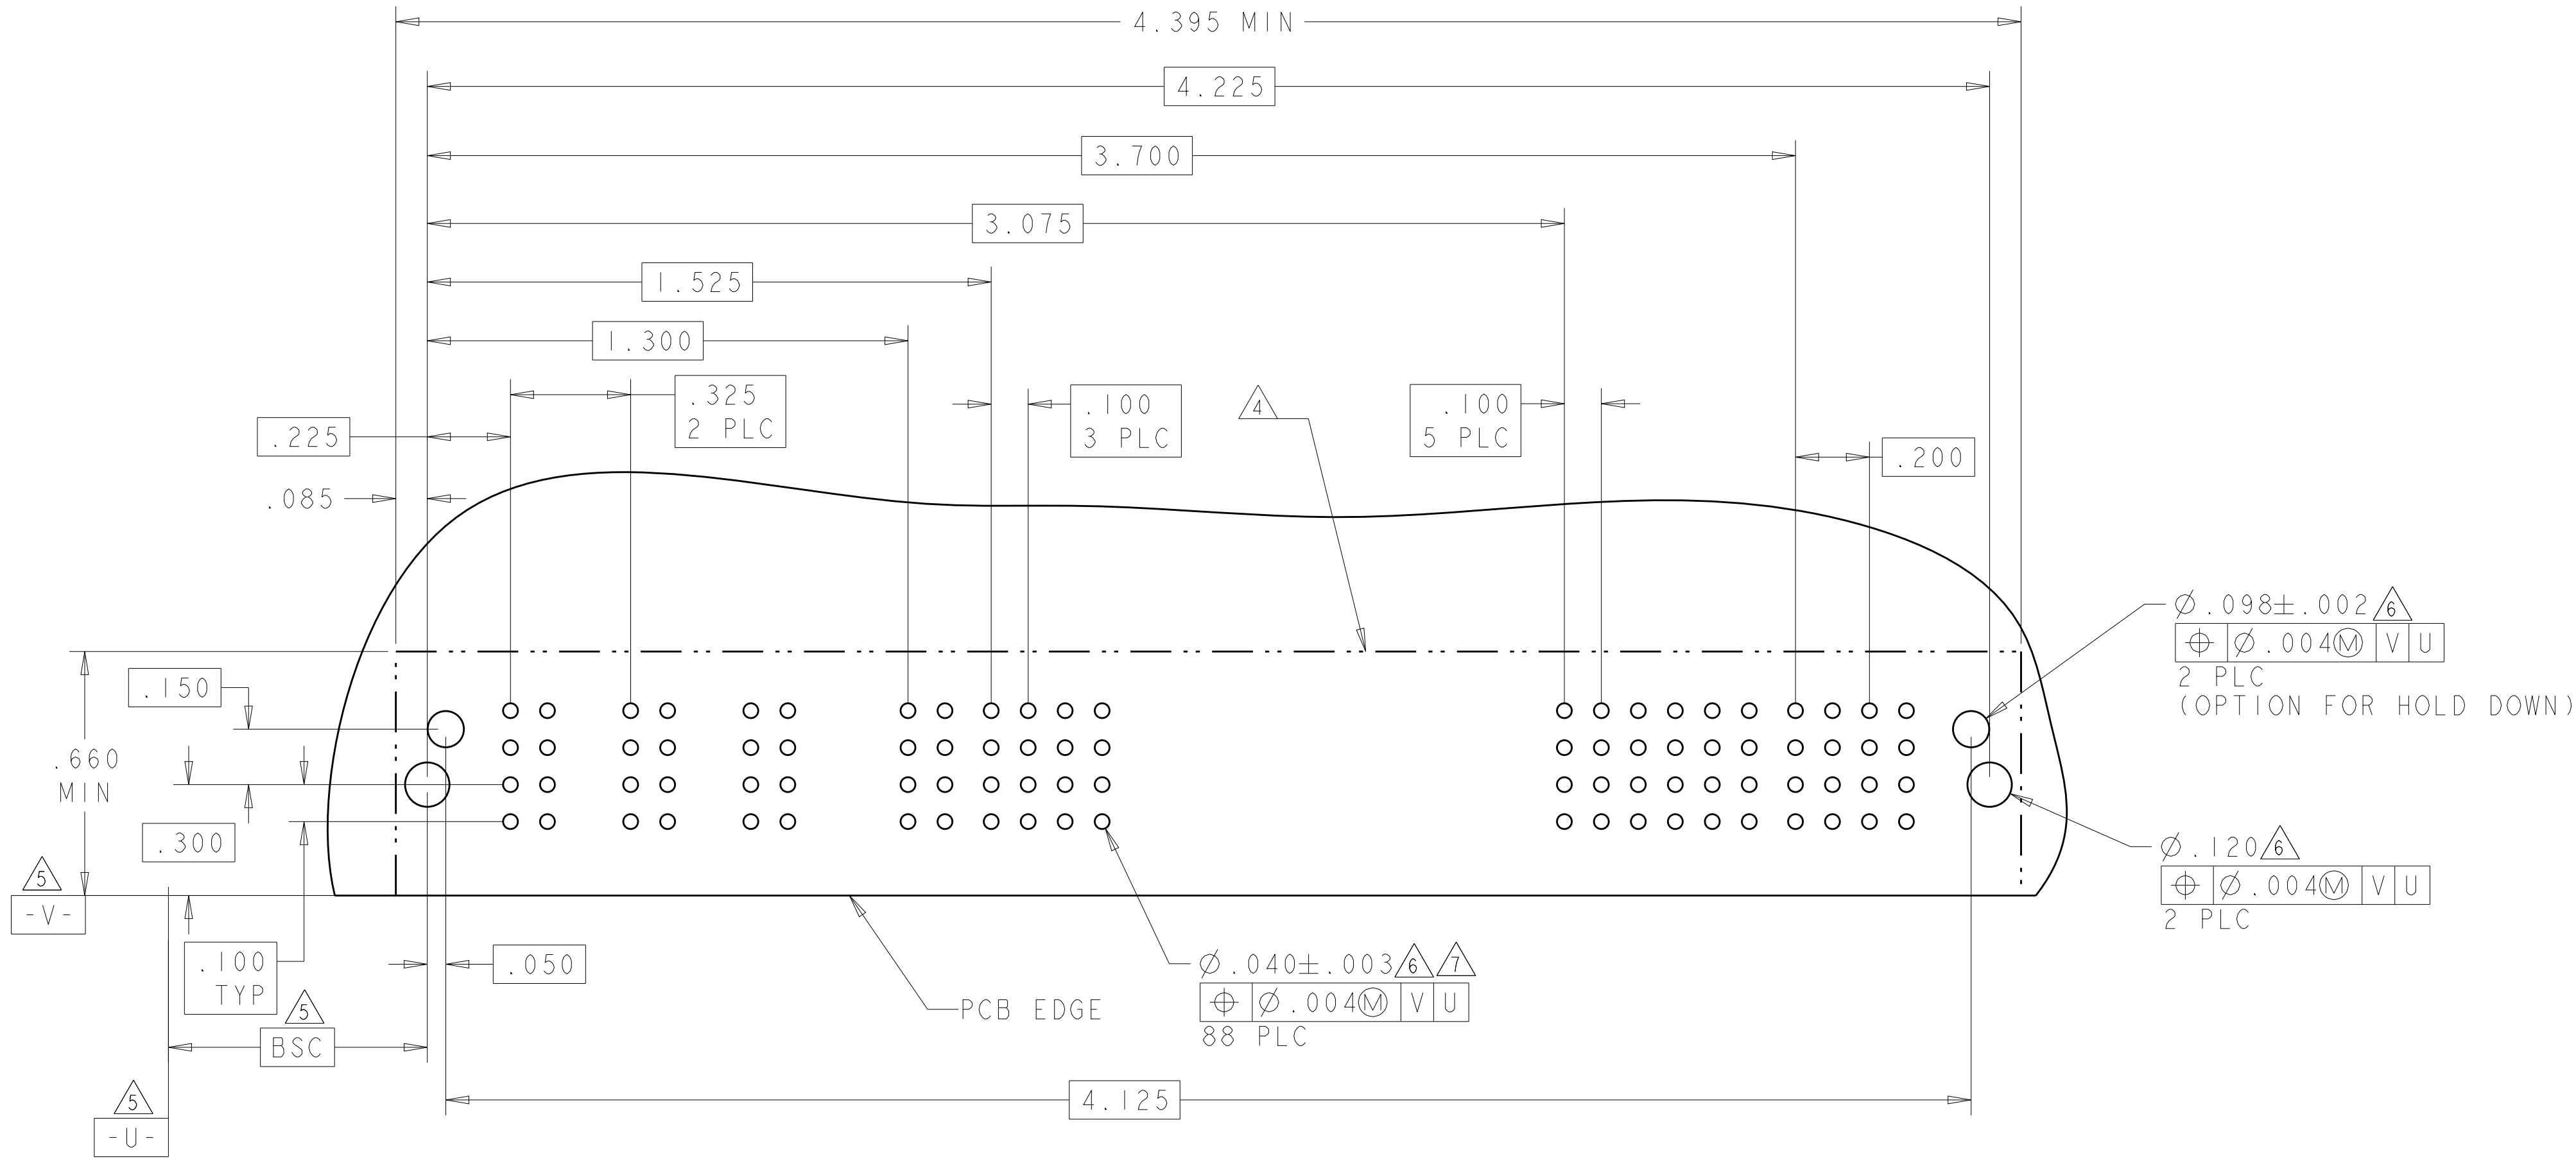


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. ZHAO	10APR2007	TE Connectivity	
		CHK S. ZHAO	10APR2007		
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
		0 PLC ±.01		PRODUCT SPEC	
		1 PLC ±.01		108-2292	
		2 PLC ±.01		APPLICATION SPEC	
		3 PLC ±.005		114-13251	
		4 PLC ±.0020		WEIGHT	
		ANGLES ±.0020		CUSTOMER DRAWING	
		FINISH		SCALE 4:1	
				SHEET 11 OF 42	
				REV S2	

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER			SIGNAL															
			P1	LP1	LP2	1	2	3	4	5	6	7	8	9	10	11	12	LP3	LP4	P2	
1-6450830-7	D		TM	LML	LML	E	E	E	E	E	E	E	E	E	E	E	LML	LMF	TM		
	F					F	F	F	F	F	F	F	F	F	F	F					
	G					G	G	G	G	G	G	G	G	G	G	G					G
	H					H	H	H	H	H	H	H	H	H	H	H					H
IP + 2LP + 48S + 2LP + IP																					

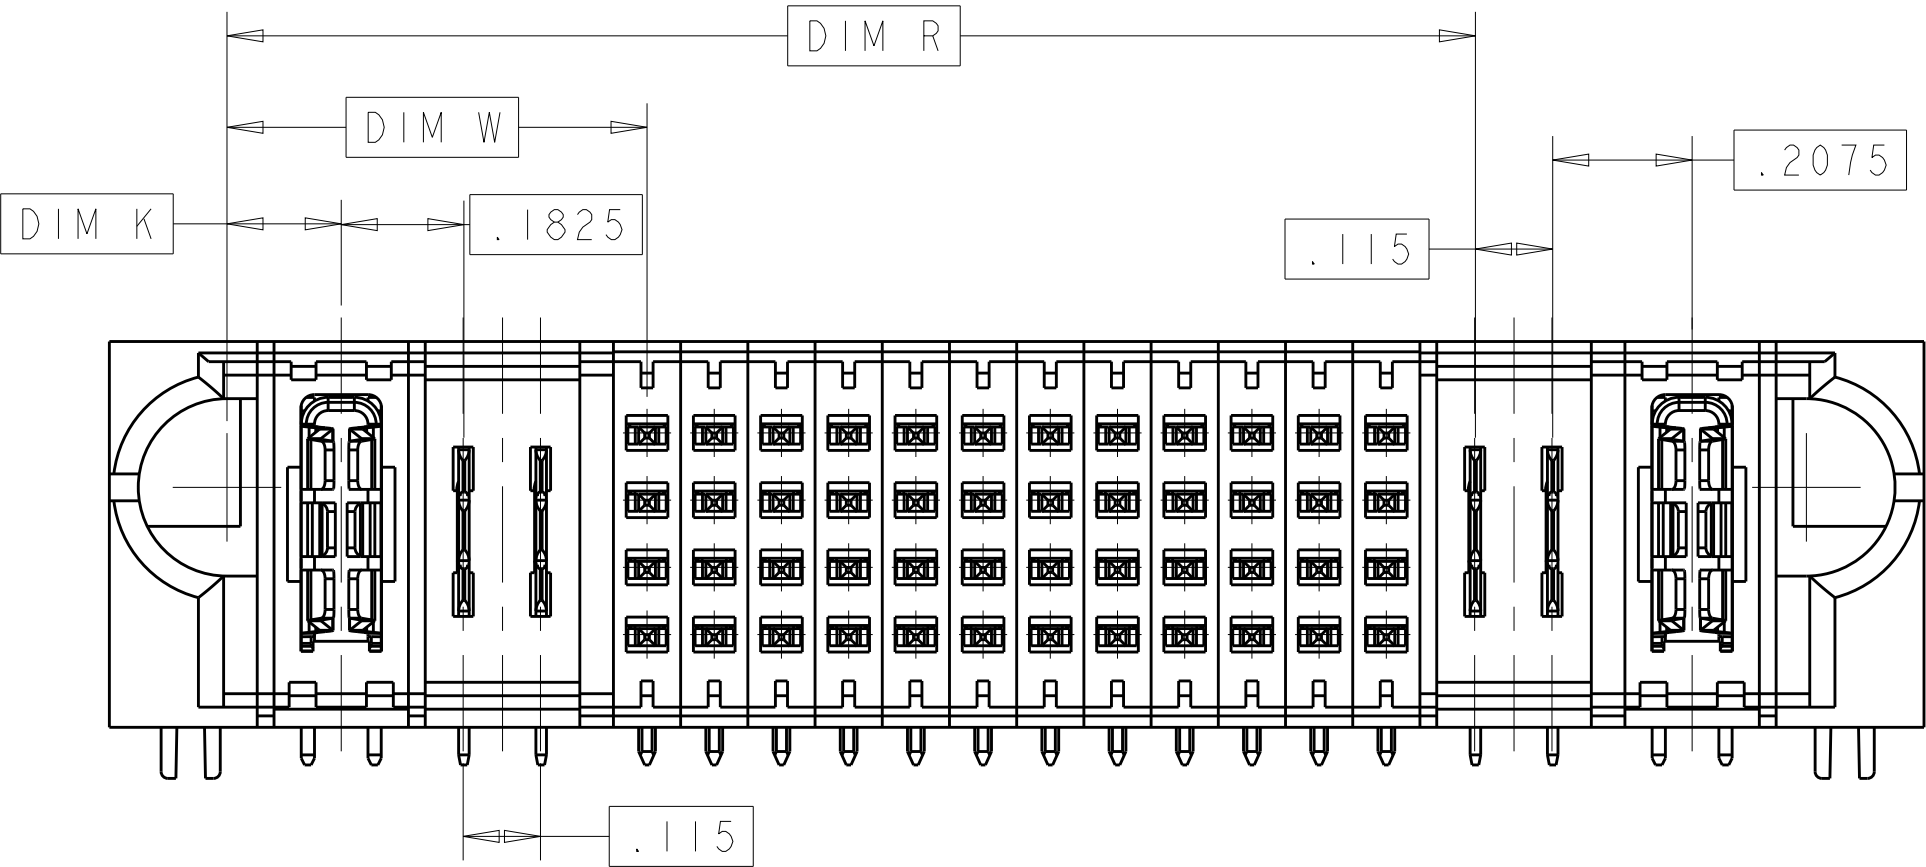

P/N:1-6450830-7 CONFIGURATION
UNSPECIFIED DIMENSION REFER TO SHEET 1

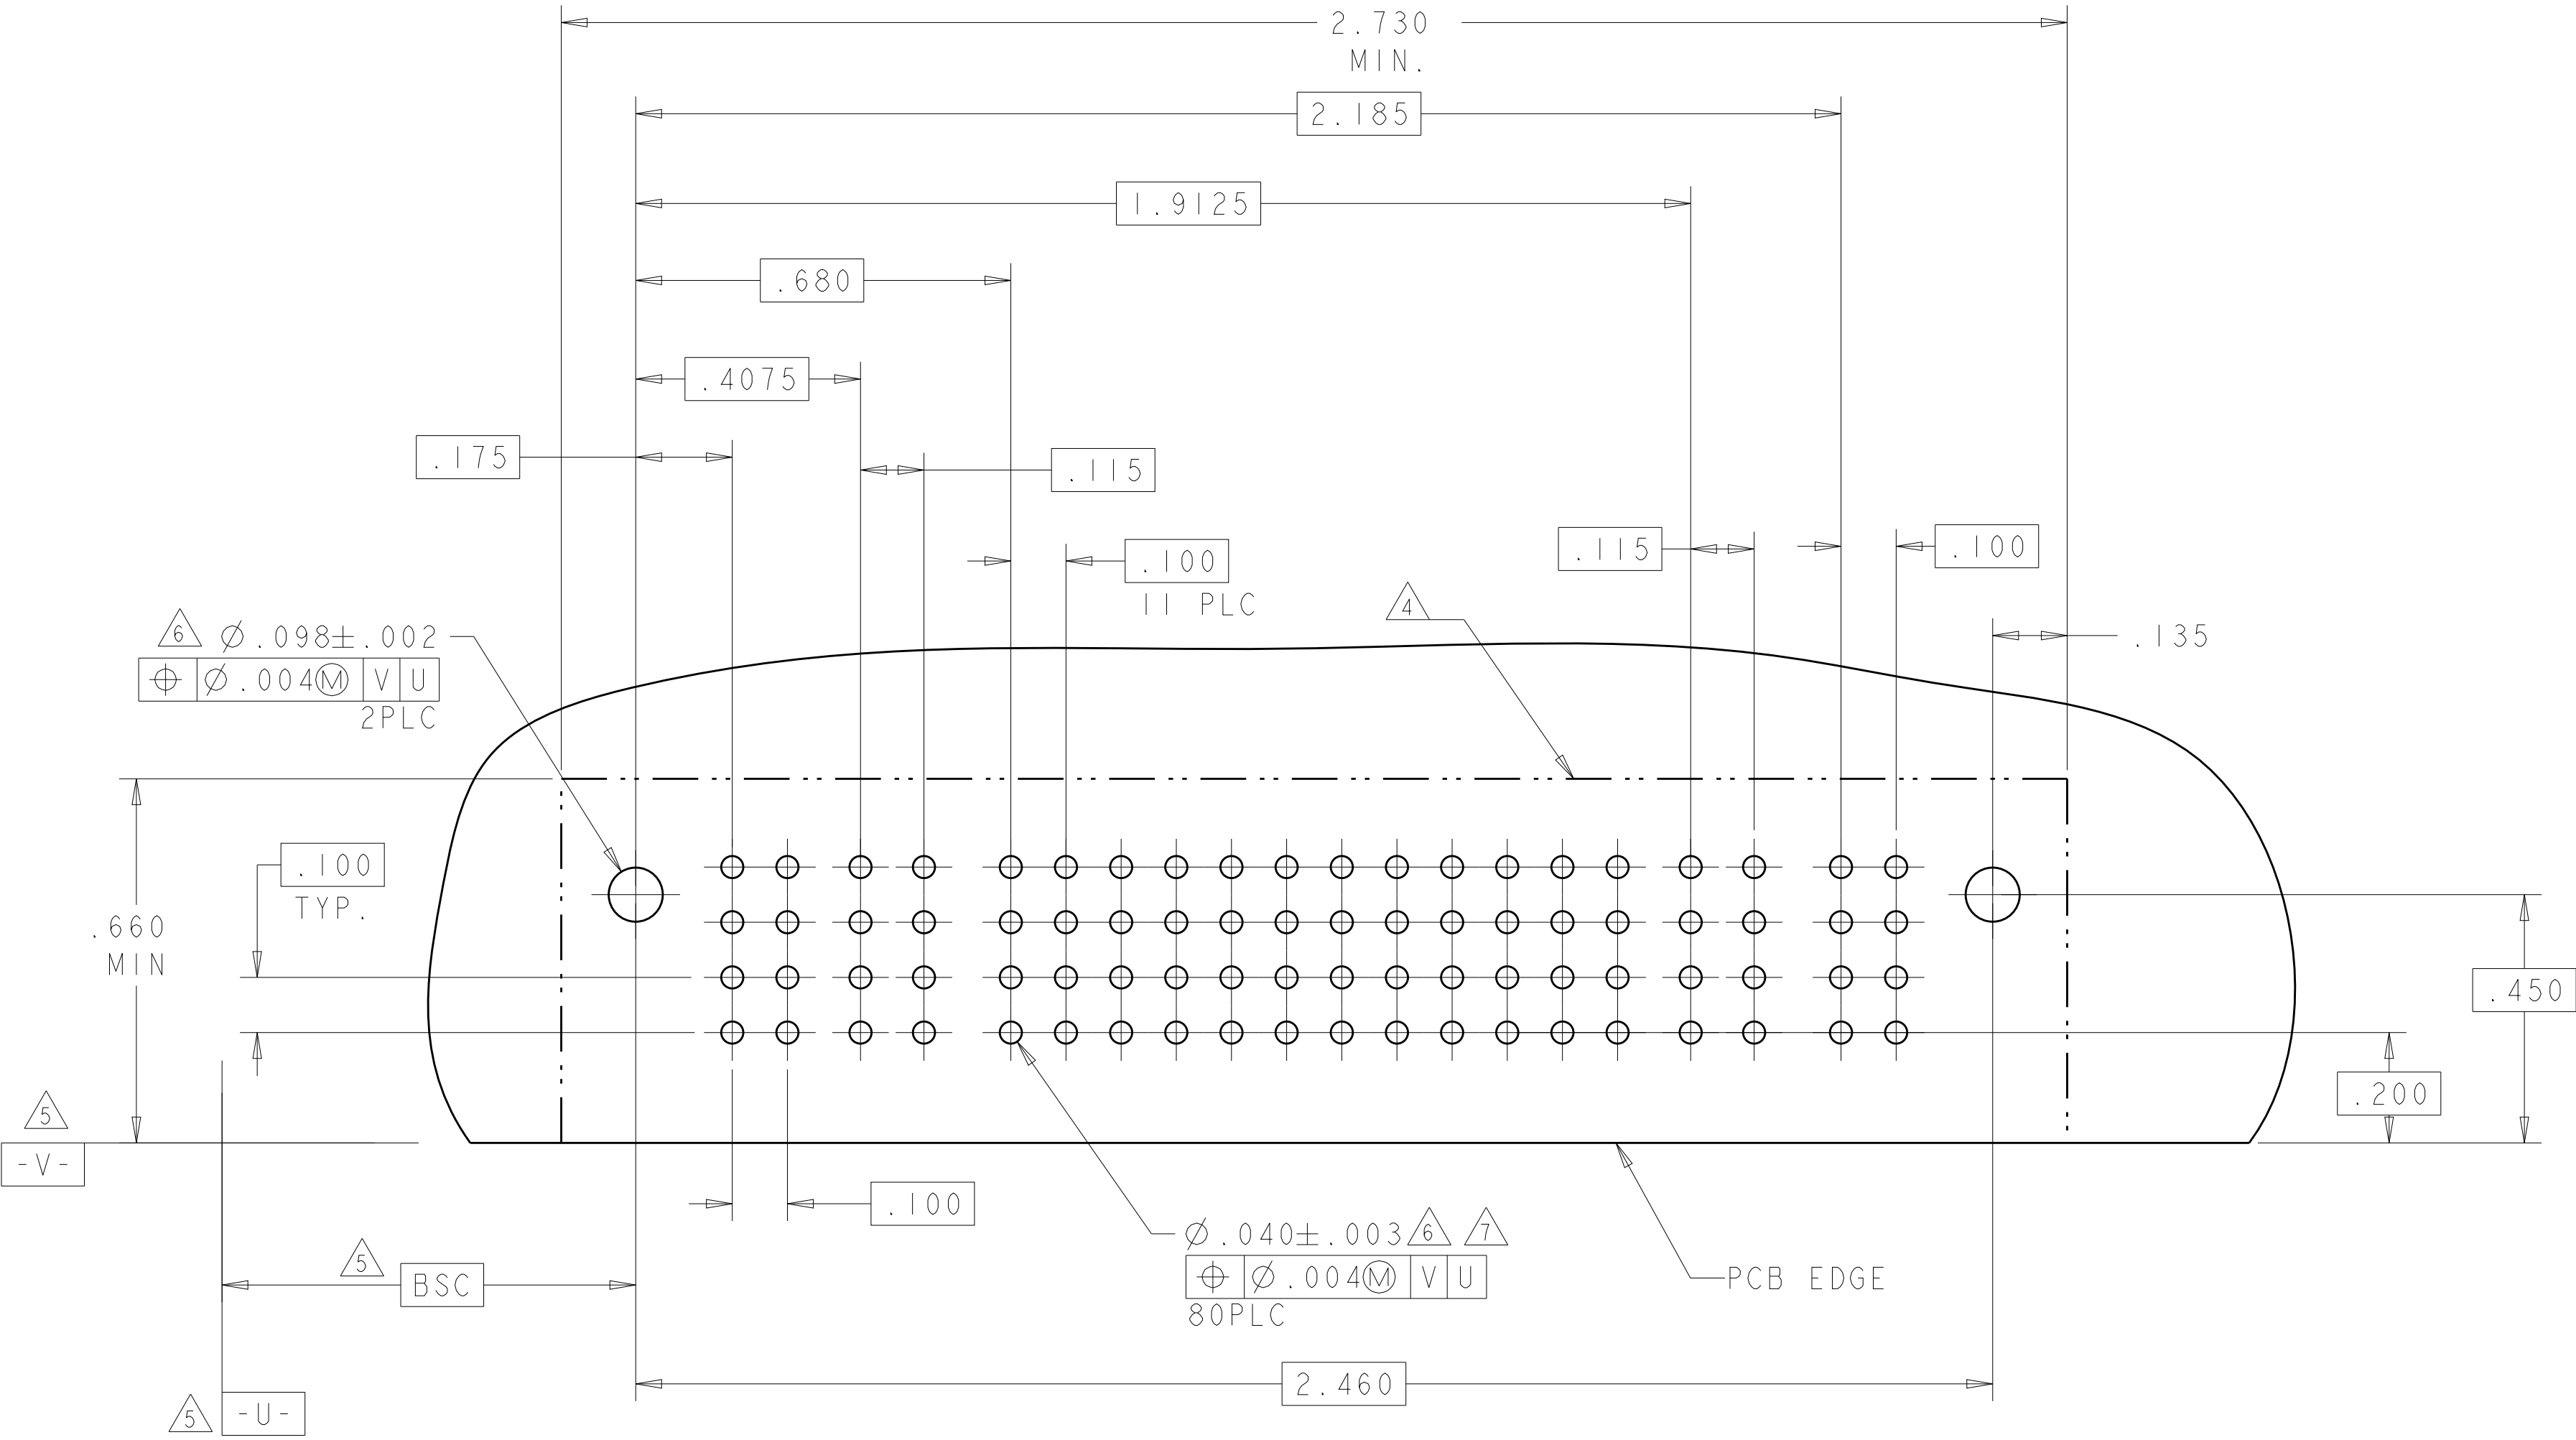

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

S. ZHAO

10APR2007

CHK

S. ZHAO

10APR2007

APVD

S. ZHAO

-

DIMENSIONS:

INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±.01

1 PLC ±.01

2 PLC ±.01

3 PLC ±.005

4 PLC ±.0020

ANGLES ±2°

FINISH

MATERIAL

-

PRODUCT SPEC

108-2292

APPLICATION SPEC

114-13251

WEIGHT

-

CUSTOMER DRAWING

NAME

RIGHT ANGLE WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM XLE

SIZE

A1

CAGE CODE

00779

DRAWING NO

6450830

RESTRICTED TO

-

SCALE

4:1

SHEET

12

OF


42

REV


S2

TE Connectivity

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
ES	00	-	-	SEE SHEET 1	-	-

PART NUMBER	ROWS		POWER				SIGNAL							POWER			
			P1	P2	P3	P4	1	2	3	4	5	6	7	P5	P6	P7	
I-6450830-9	D C B A		 TM	 TM	 TM	 TM	J	J	J	J	J			 TM	 TM	 TM	
							K	K	K	K	K						
							N	N	N	N	N						
							S	S	S	S	S						
4P + 28S + 3ACP																	

NO CONTACTS LOADED

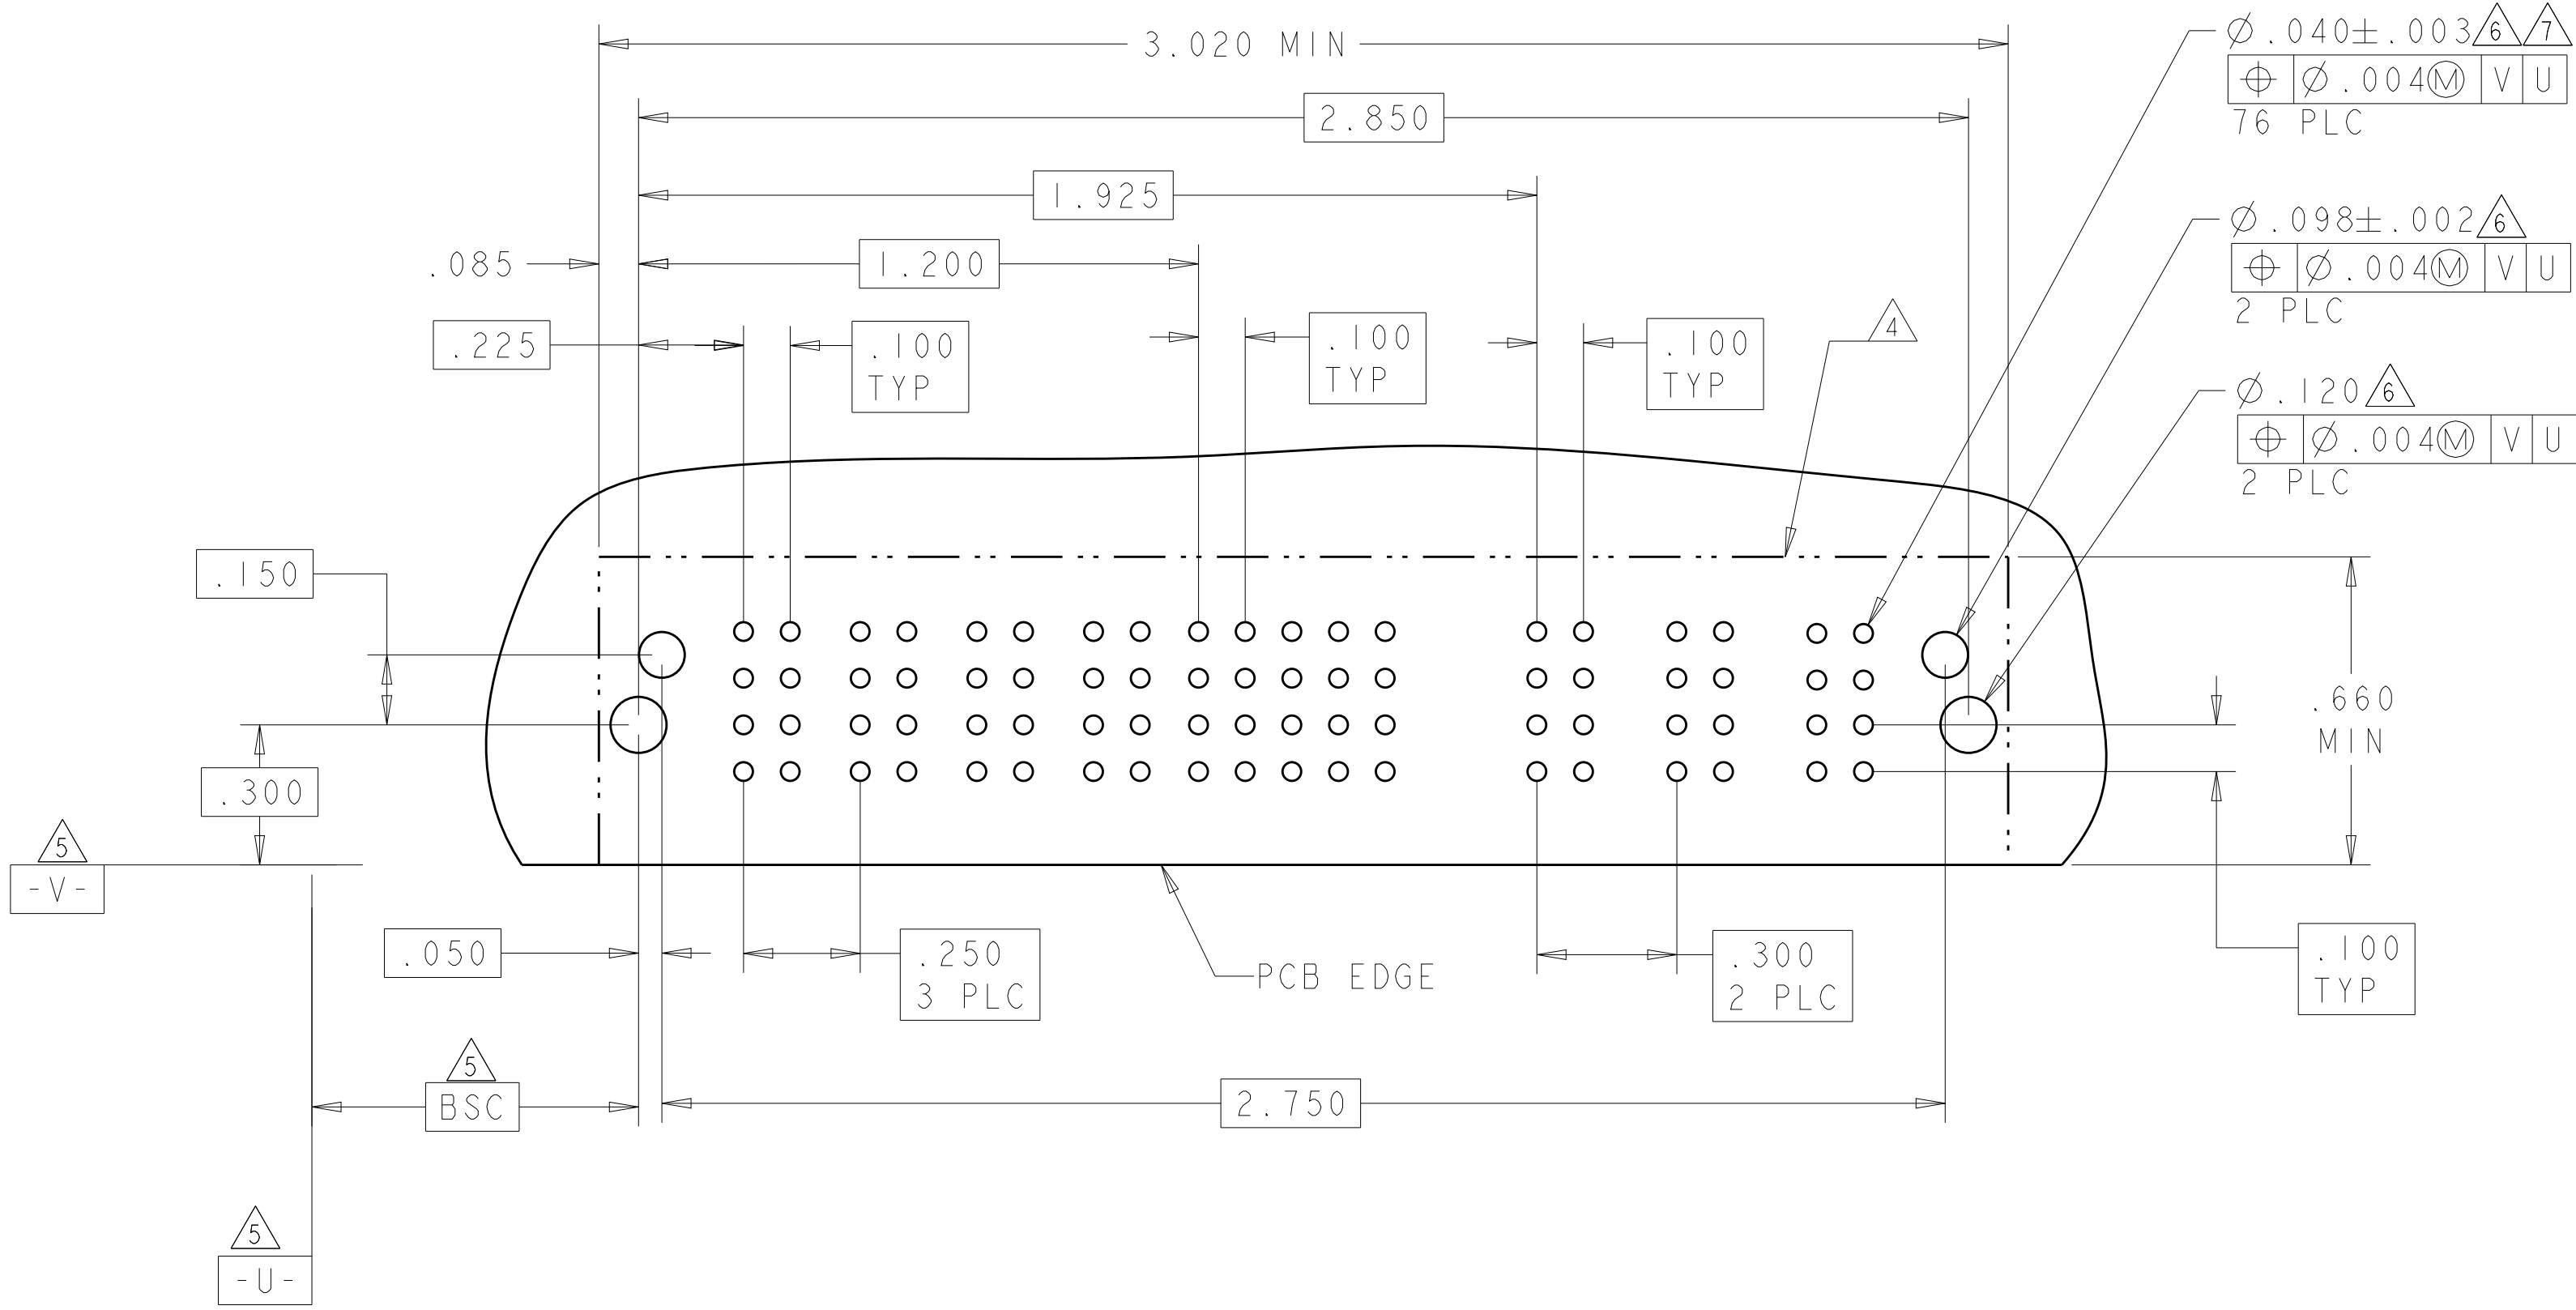

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

S.ZHAO

10APR2007

CHK

S.ZHAO

10APR2007

APVD

S.ZHAO

-

DIMENSIONS:

INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±.01

1 PLC ±.01

2 PLC ±.01

3 PLC ±.005

4 PLC ±.0020

ANGLES ±2°

FINISH -

MATERIAL

-

DWN

S.ZHAO

10APR2007

CHK

S.ZHAO

10APR2007

APVD

S.ZHAO

-

PRODUCT SPEC

108-2292

APPLICATION SPEC

114-13251

WEIGHT

-

CUSTOMER DRAWING

NAME

RIGHT ANGLE WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM XLE

SIZE

A1

CAGE CODE

00779

DRAWING NO

6450830

RESTRICTED TO

-

SCALE

4:1

SHEET

13


OF

42


REV



S2

PART NUMBER	ROWS		POWER	SIGNAL						POWER	
			P1	I	2	3	4	5	6	P2	
2-6450830-6	D		TM	J	J	J	J	J	J	TM	
	K			K	K	K	K	K			
	N			N	N	N	N	N			
	H			S	S	S	S	S			
		HD									
IP + 24S + IP											

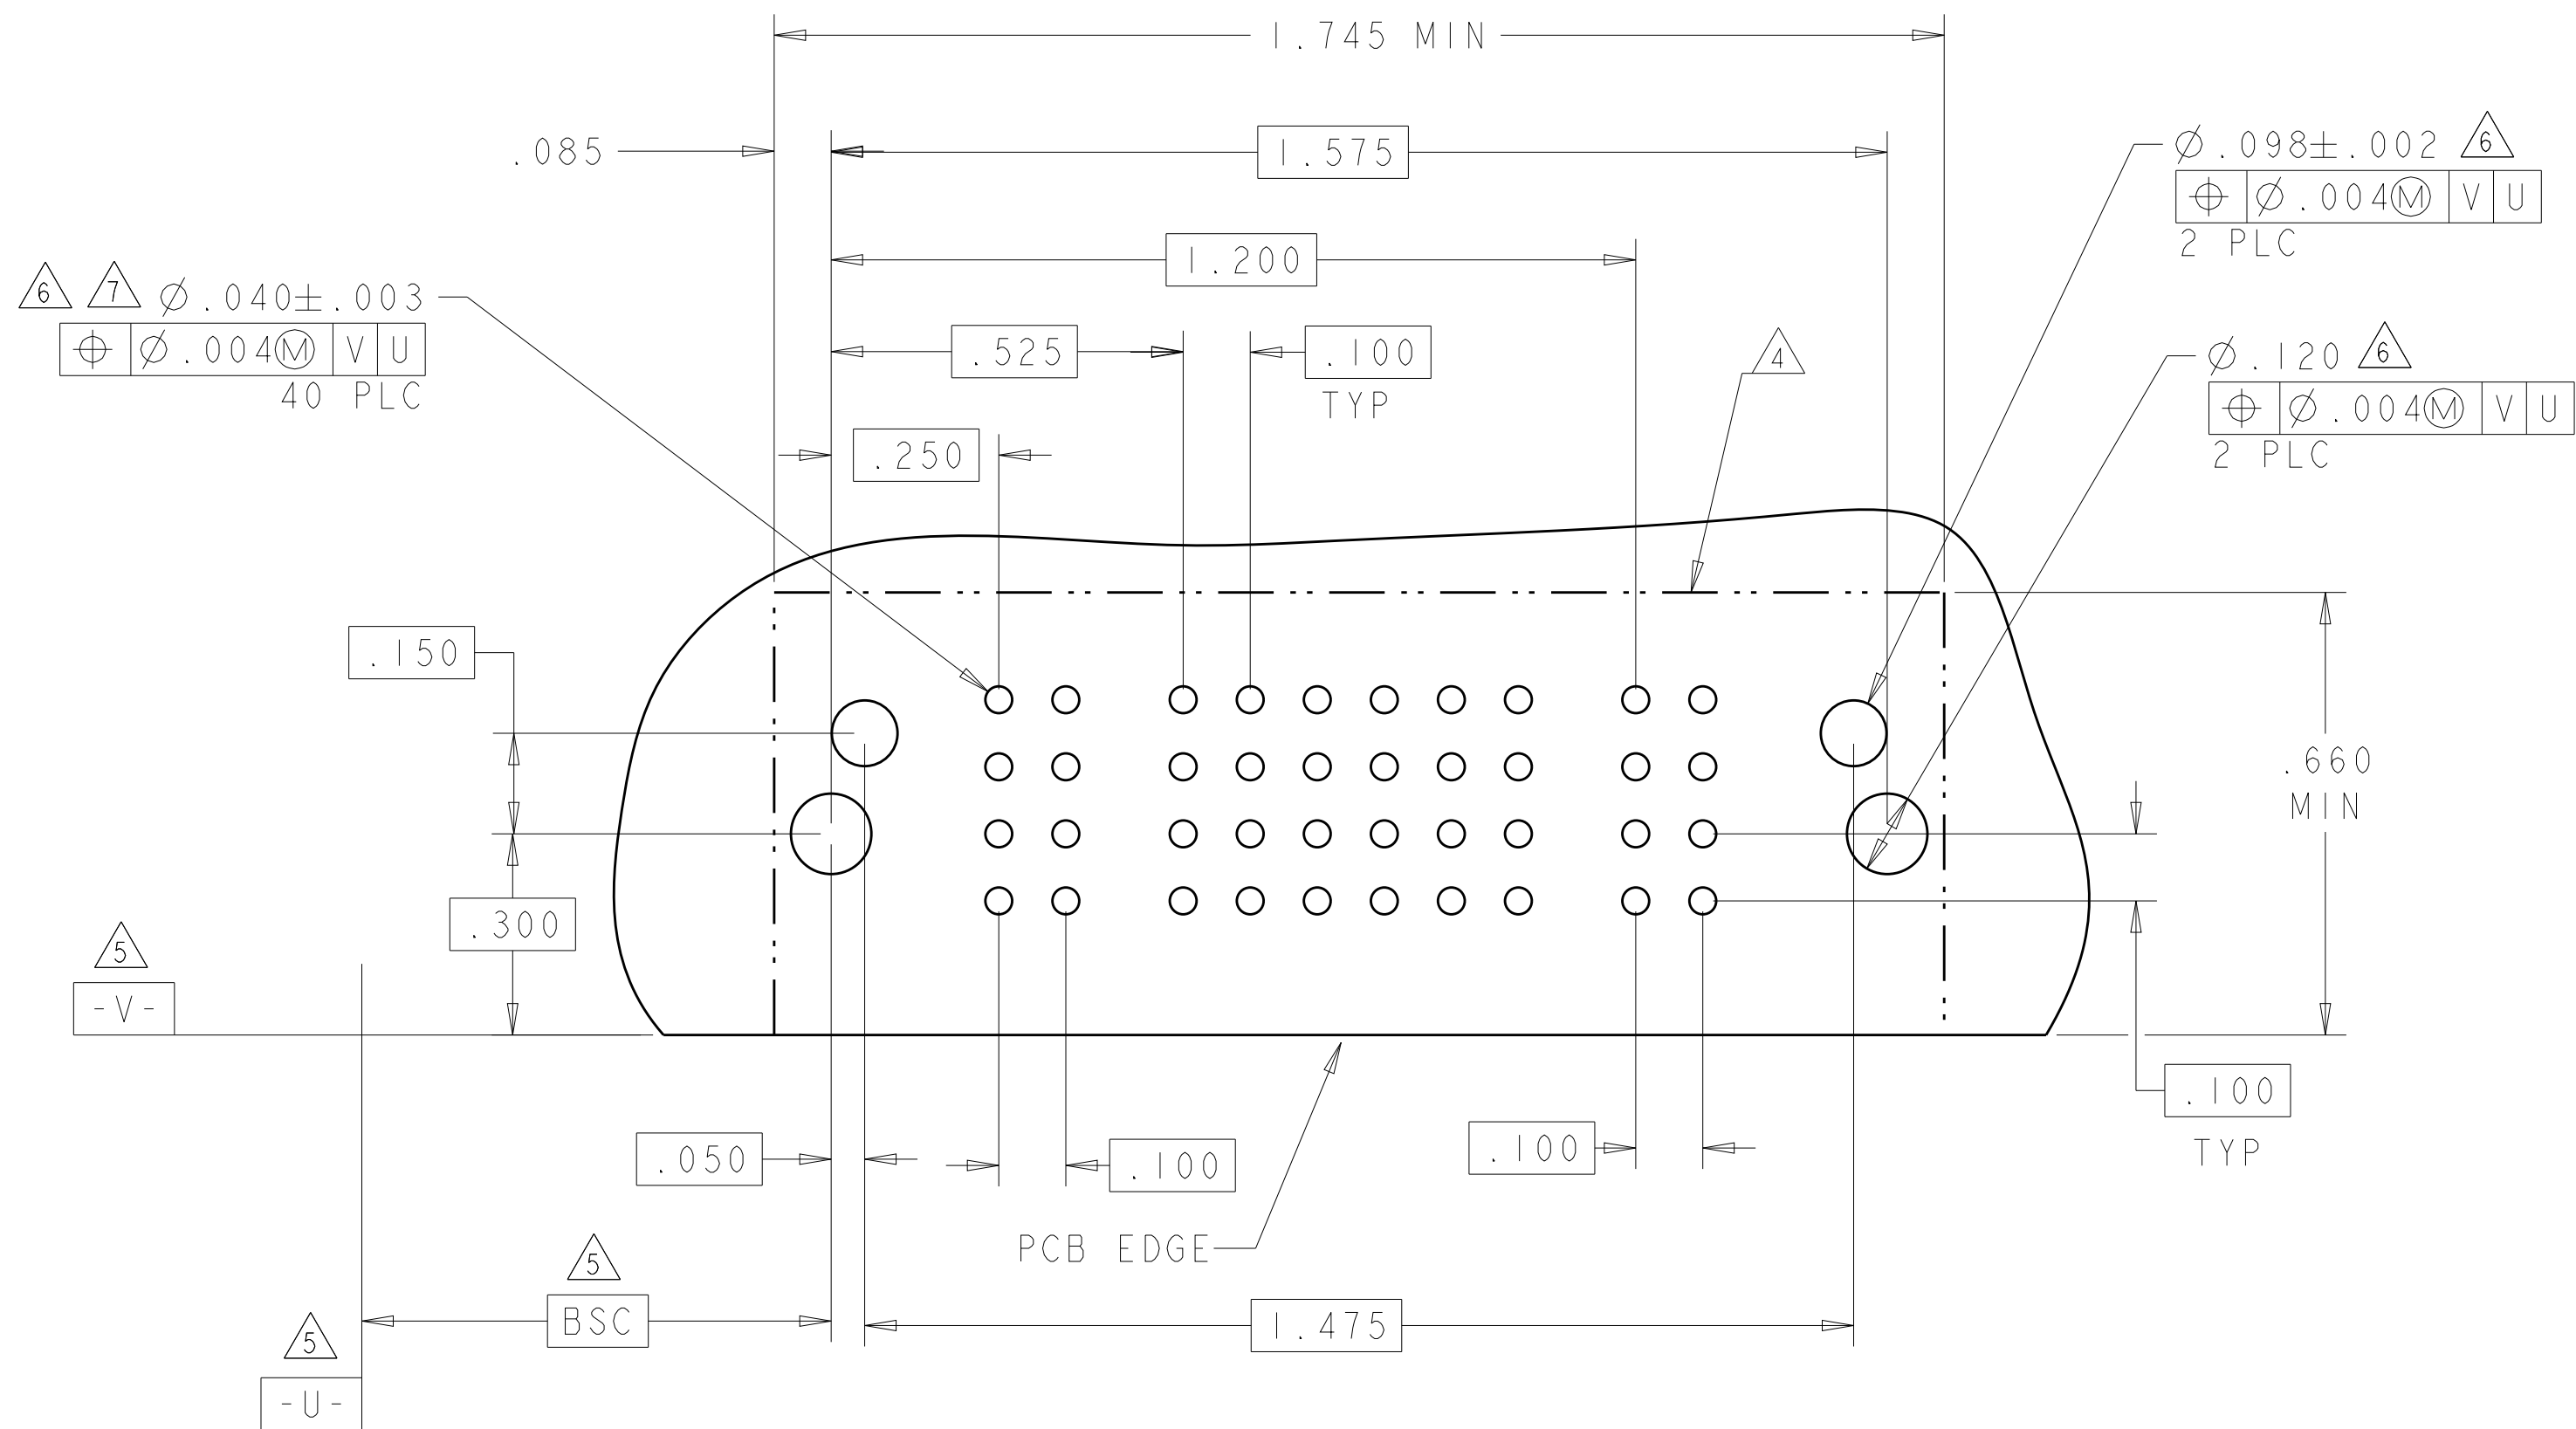
4805 (3/11)

PART NUMBER	ROWS		POWER		SIGNAL					POWER		
			P1	P2	1	2	3	4	5	P3	P4	
2-6450830-8	D		TM	TM	J	J	J	J	J	TM	TM	
	K				K	K	K	K				
	N				N	N	N	N				
	S				S	S	S	S				
	A	HD										HD
2P + 20S + 2P												

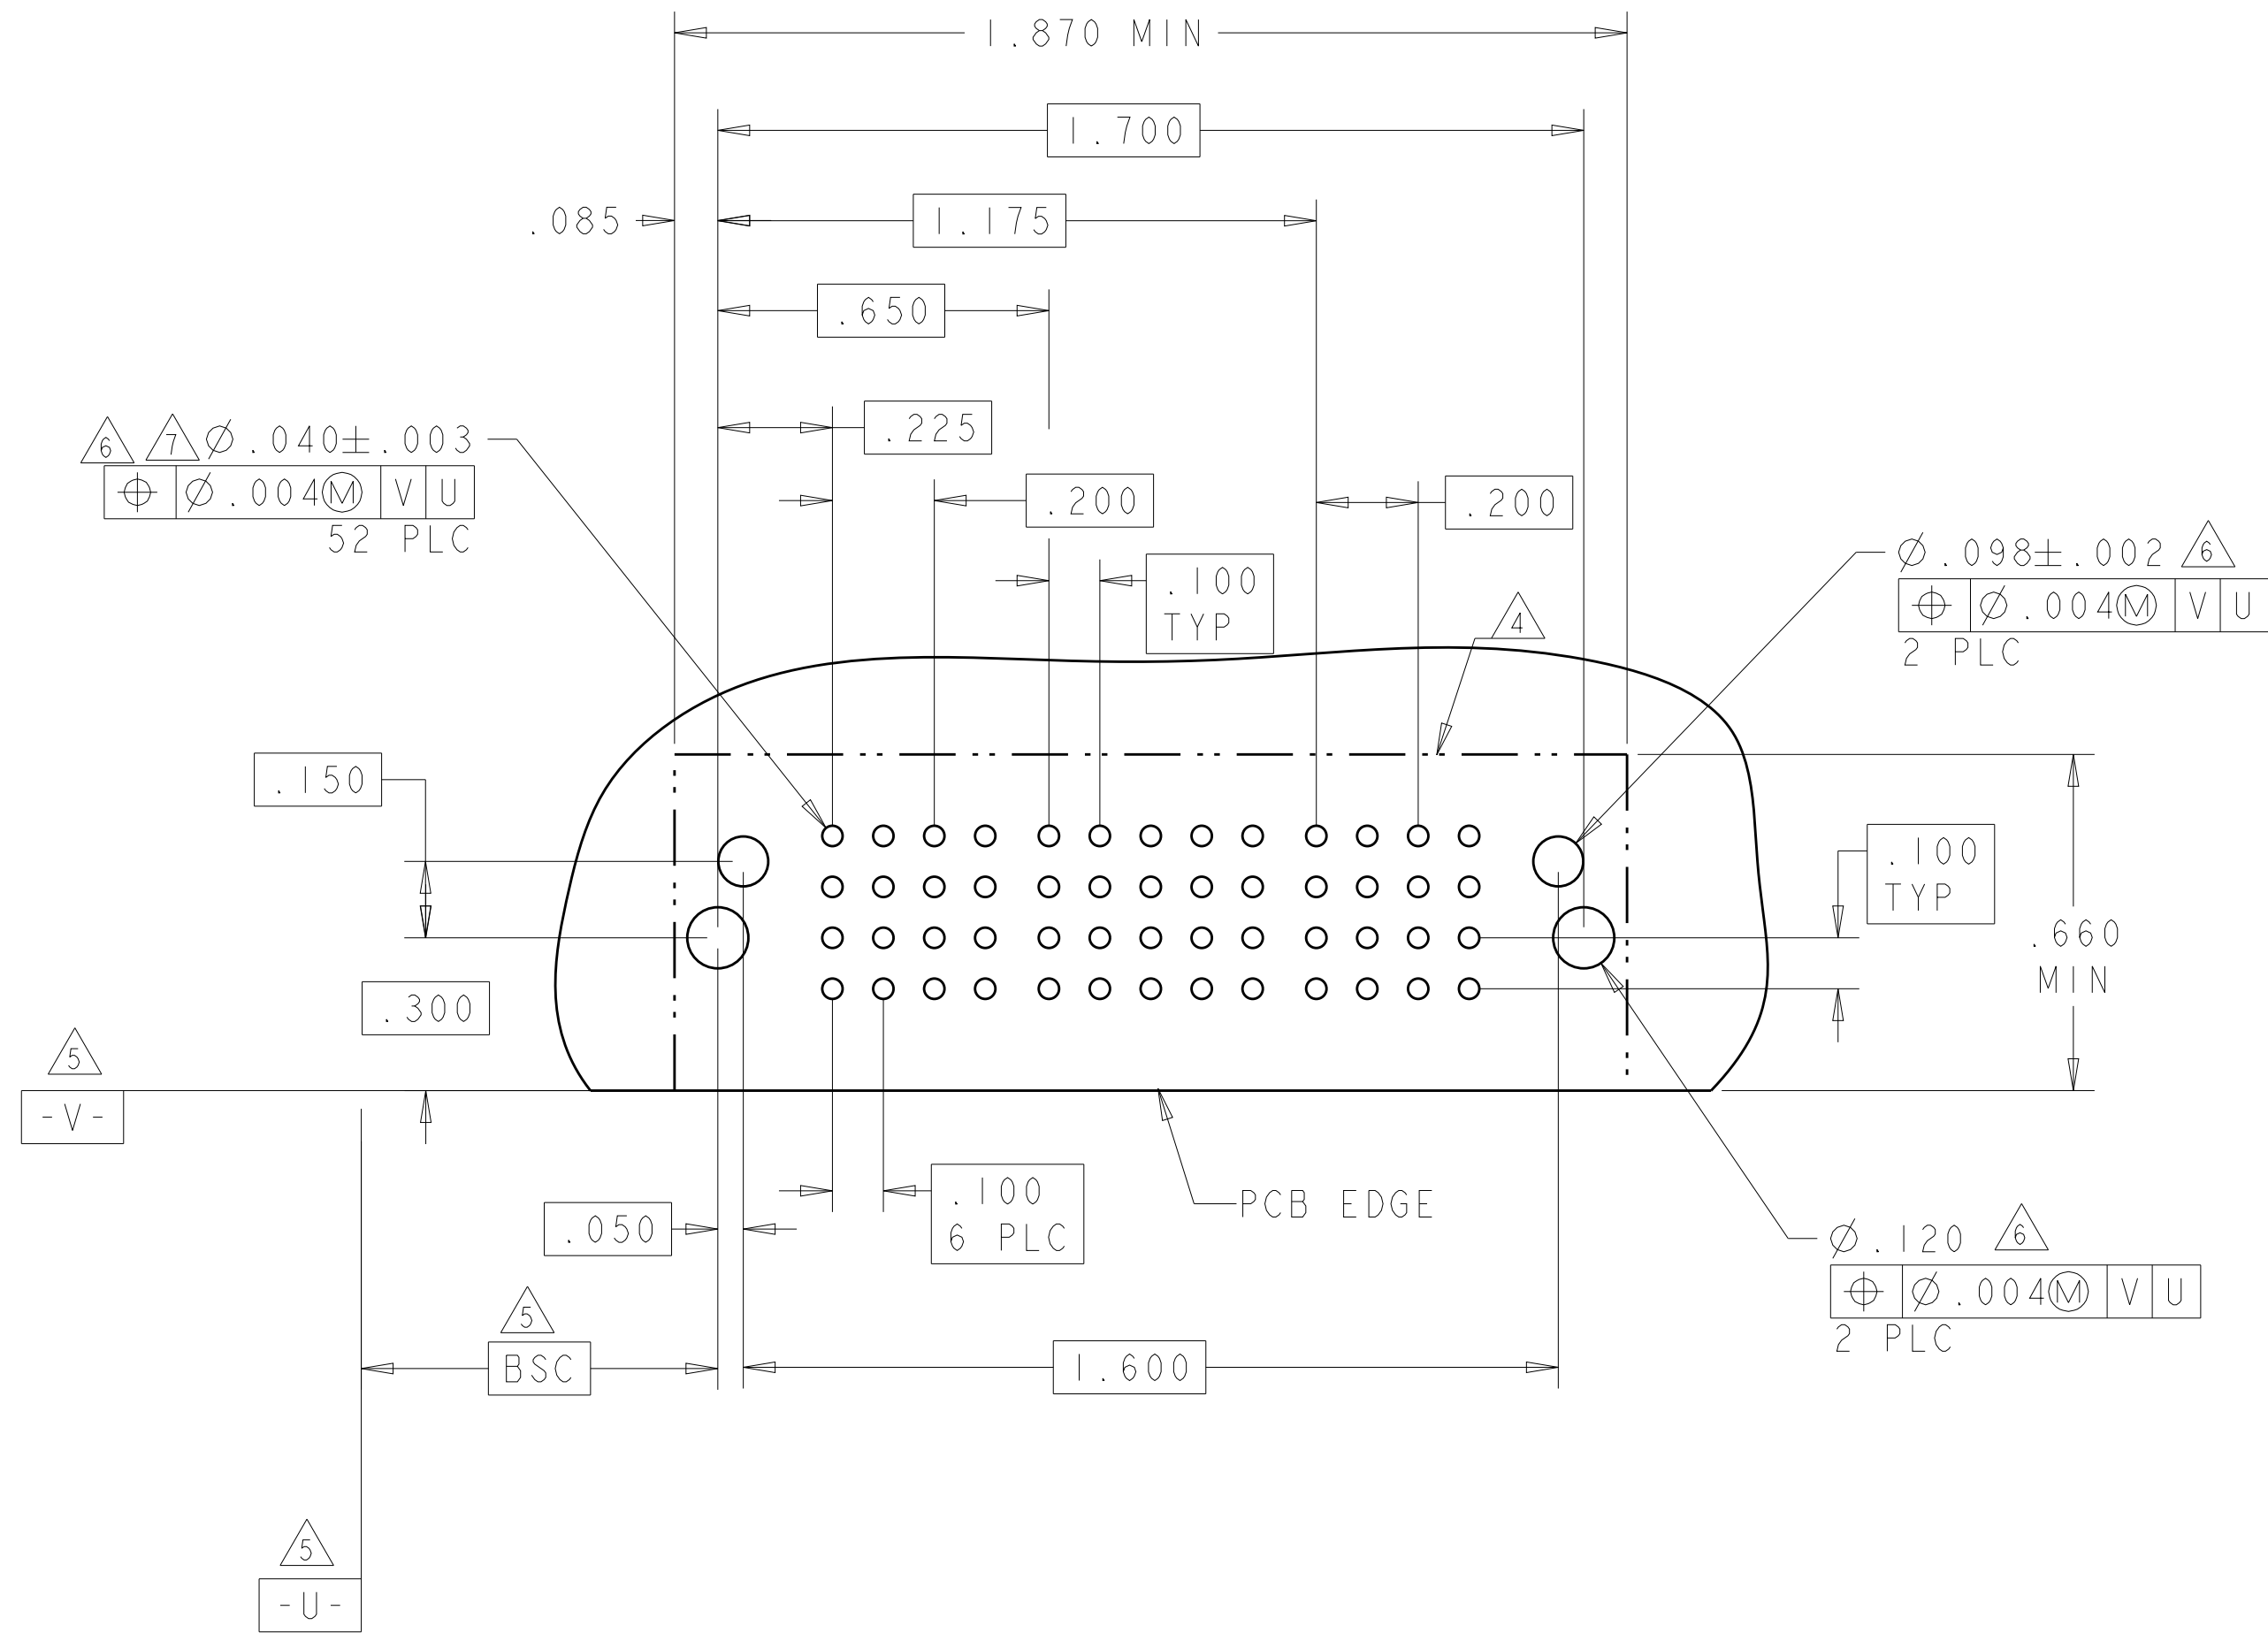4805 (3/11)

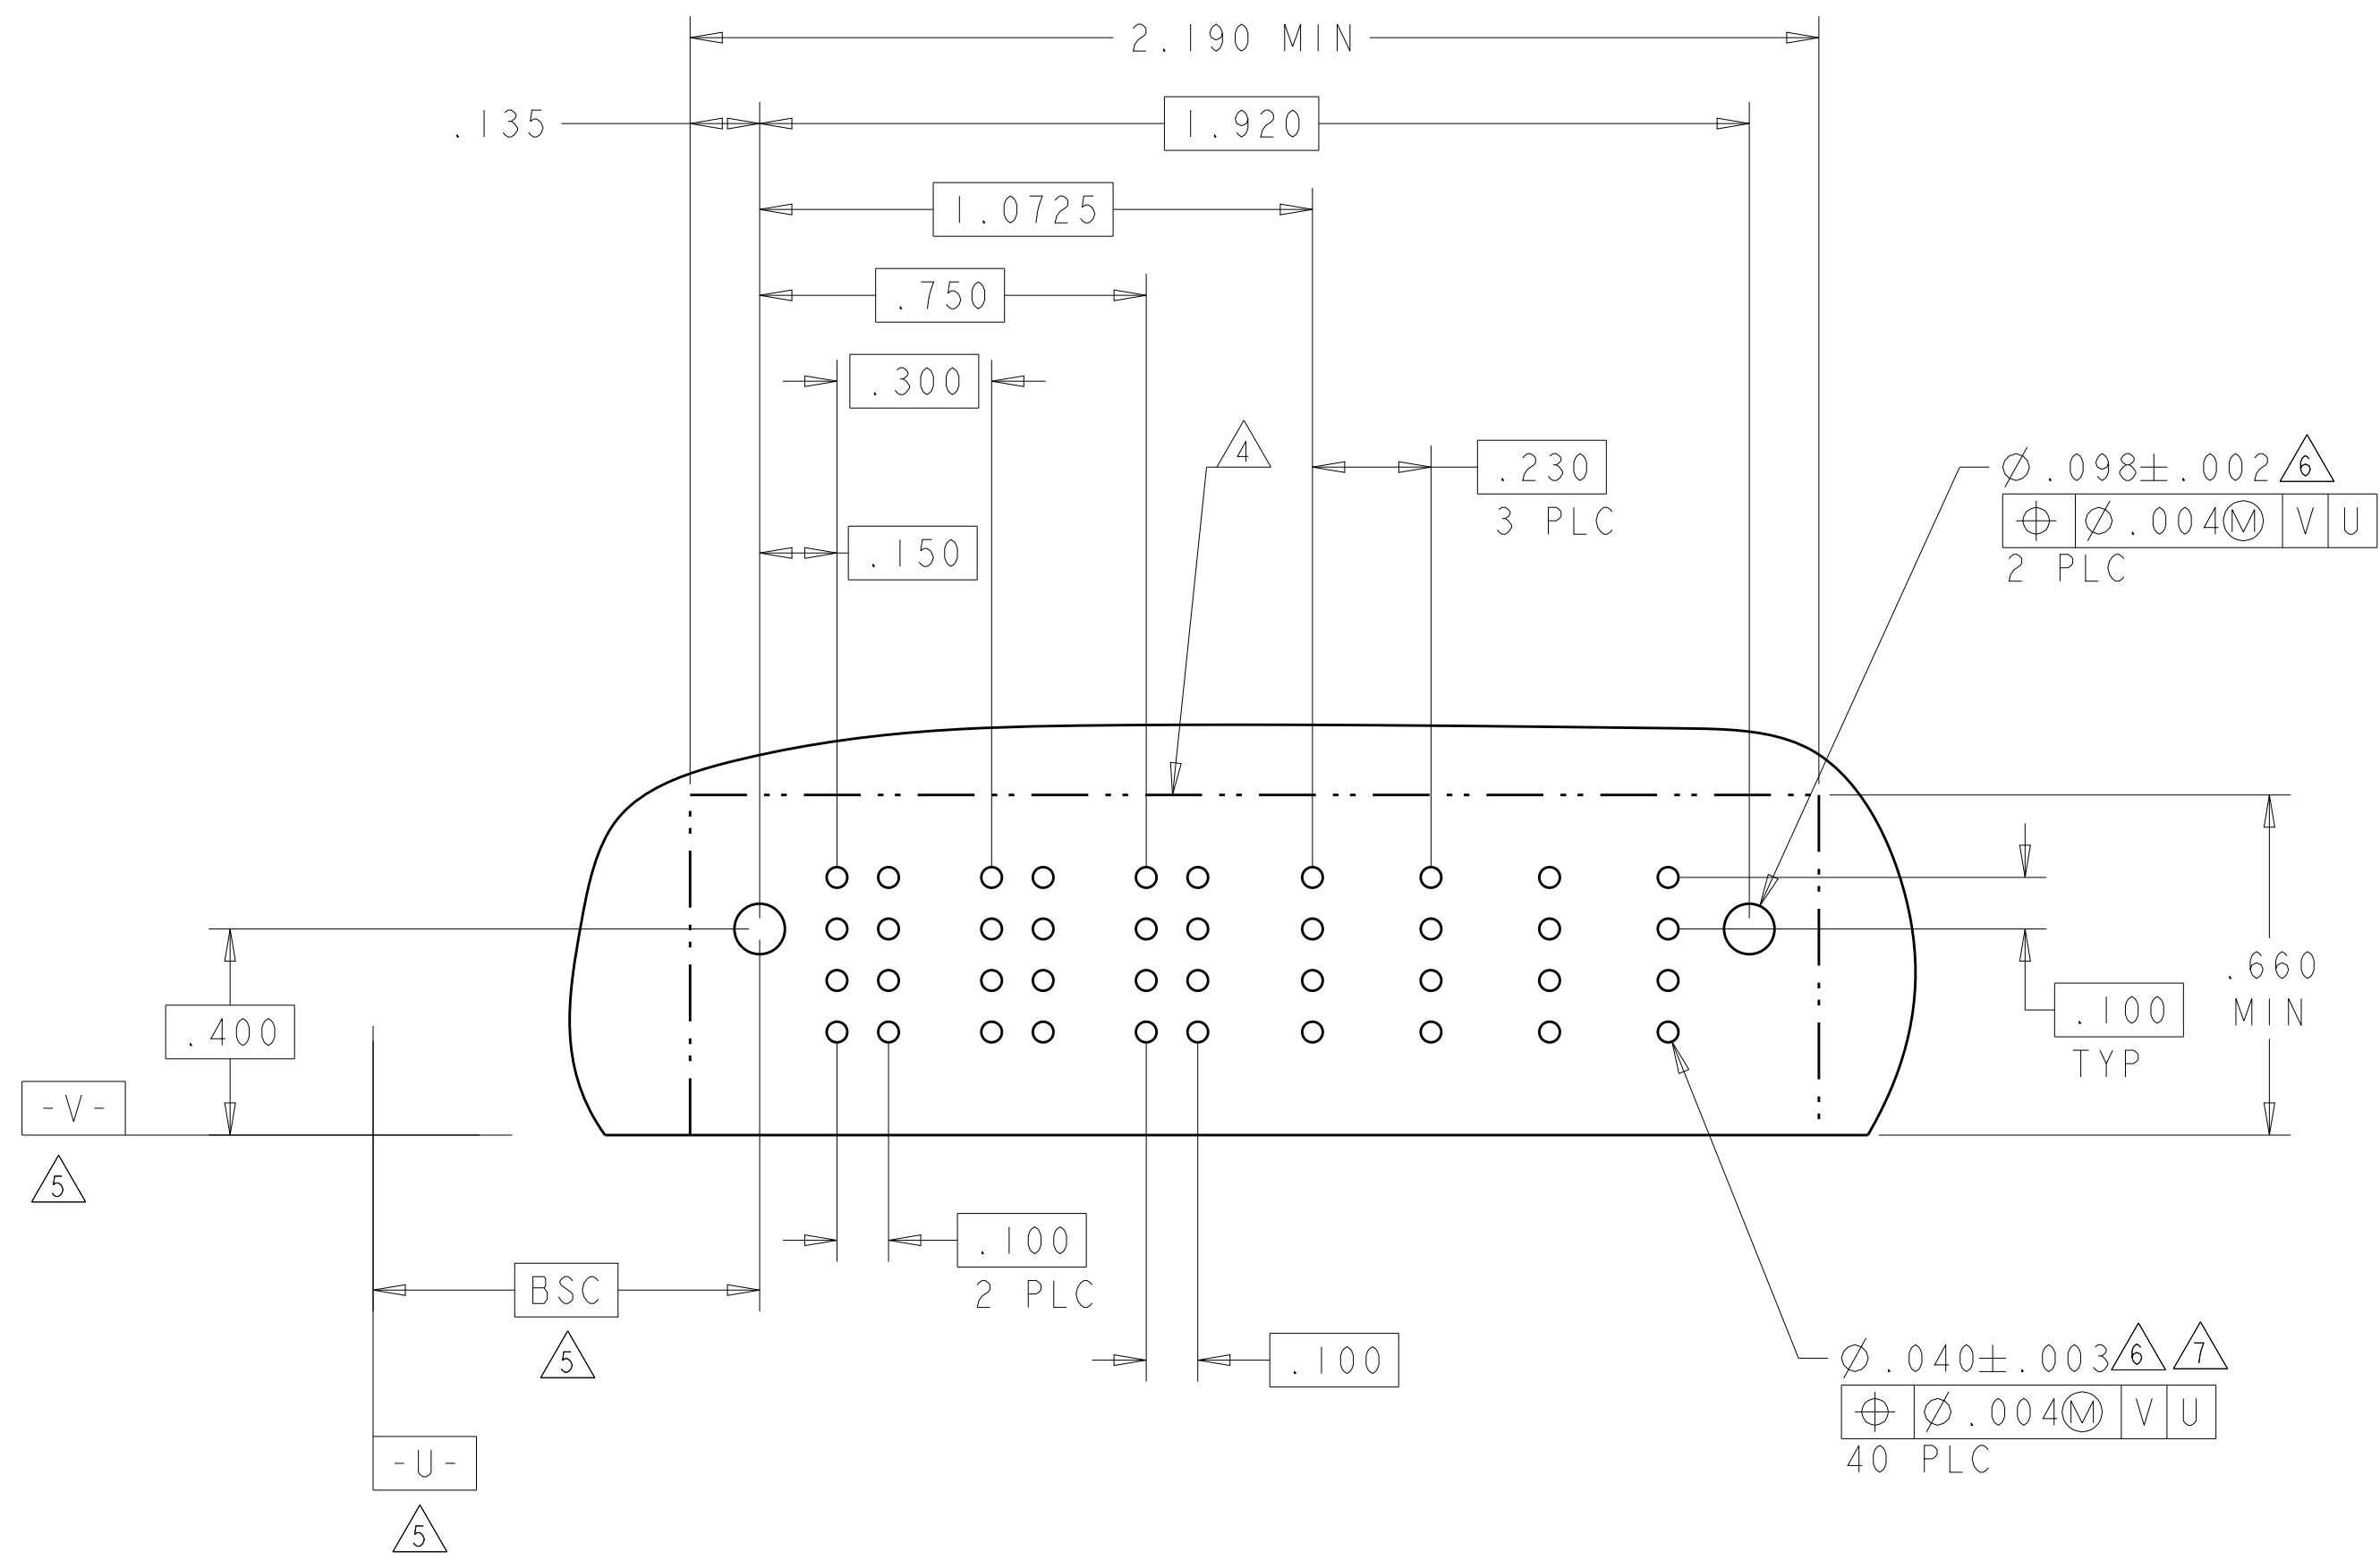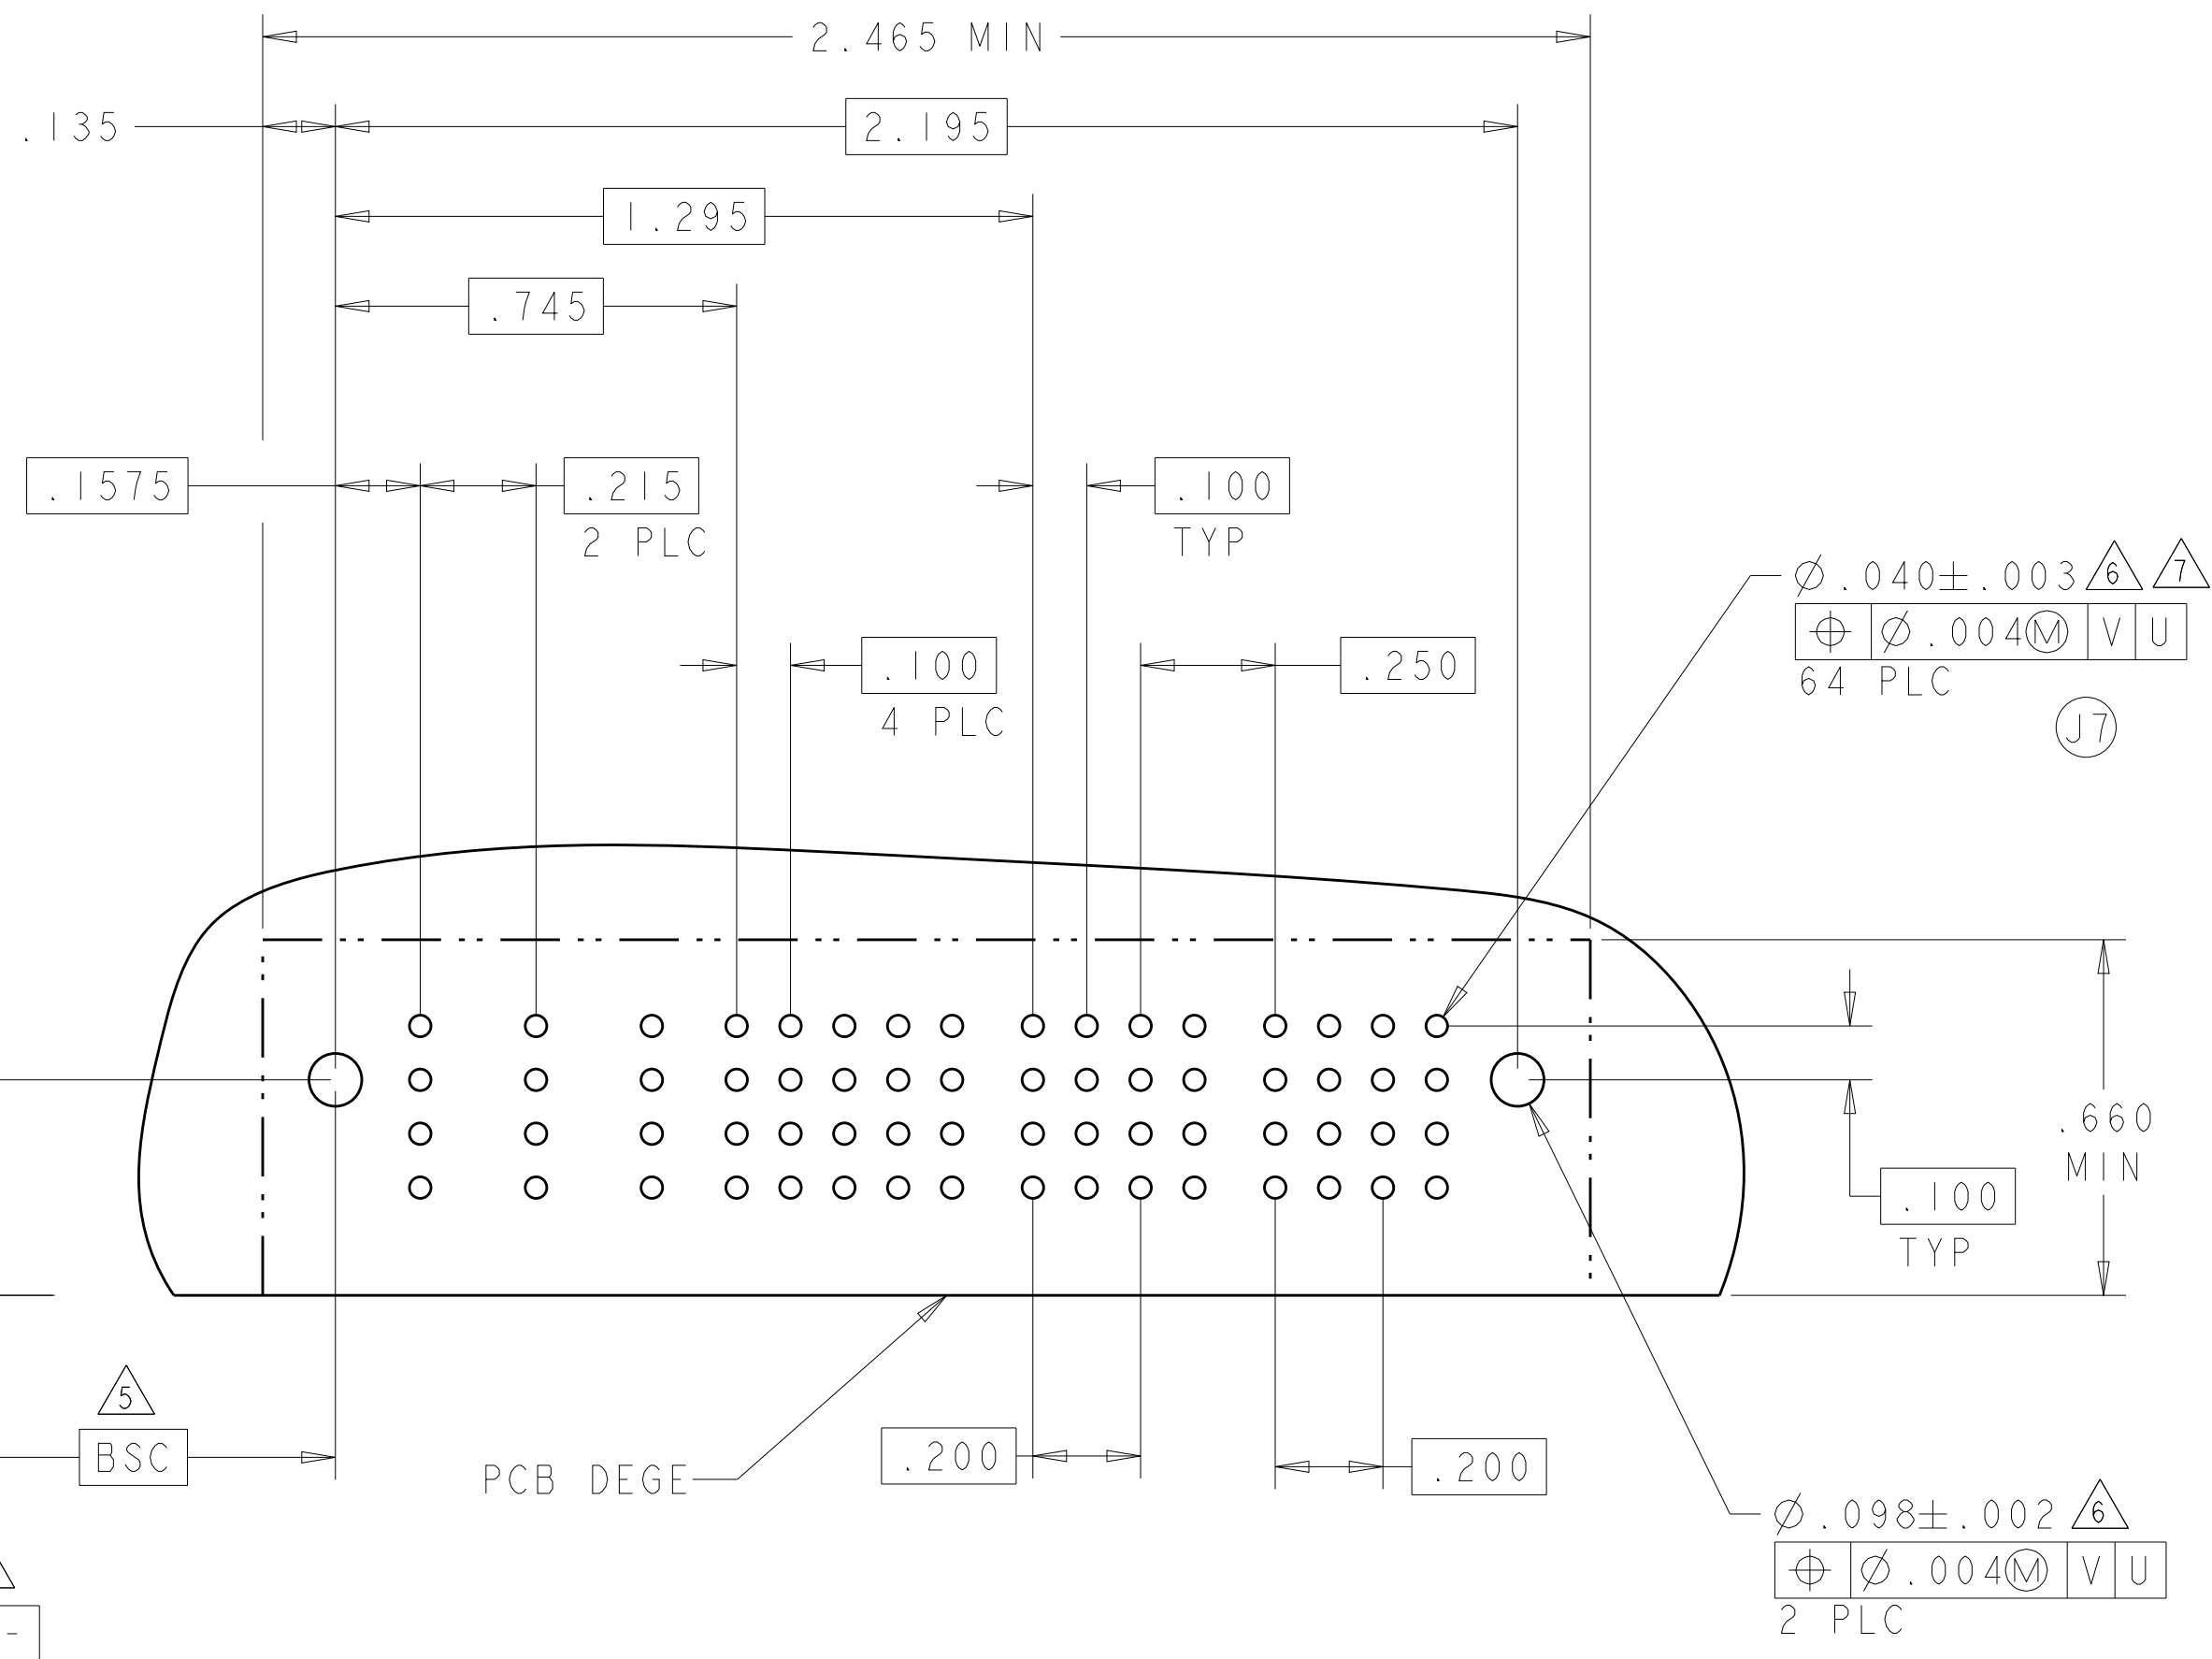
[illegible]4805 (3/11)

PART NUMBER	ROWS		POWER					SIGNAL			POWER				
			P1	P2	P3	P4	P5	1	2	3	P6	P7	P8	P9	
3-6450830-8	D C B A		TM	TM	TM	TM	TM	J	J	J	TM	TM	TM	TM	
								K	K	K					
								N	N	N					
								S	S	H					
5ACP + 12S + 4ACP															

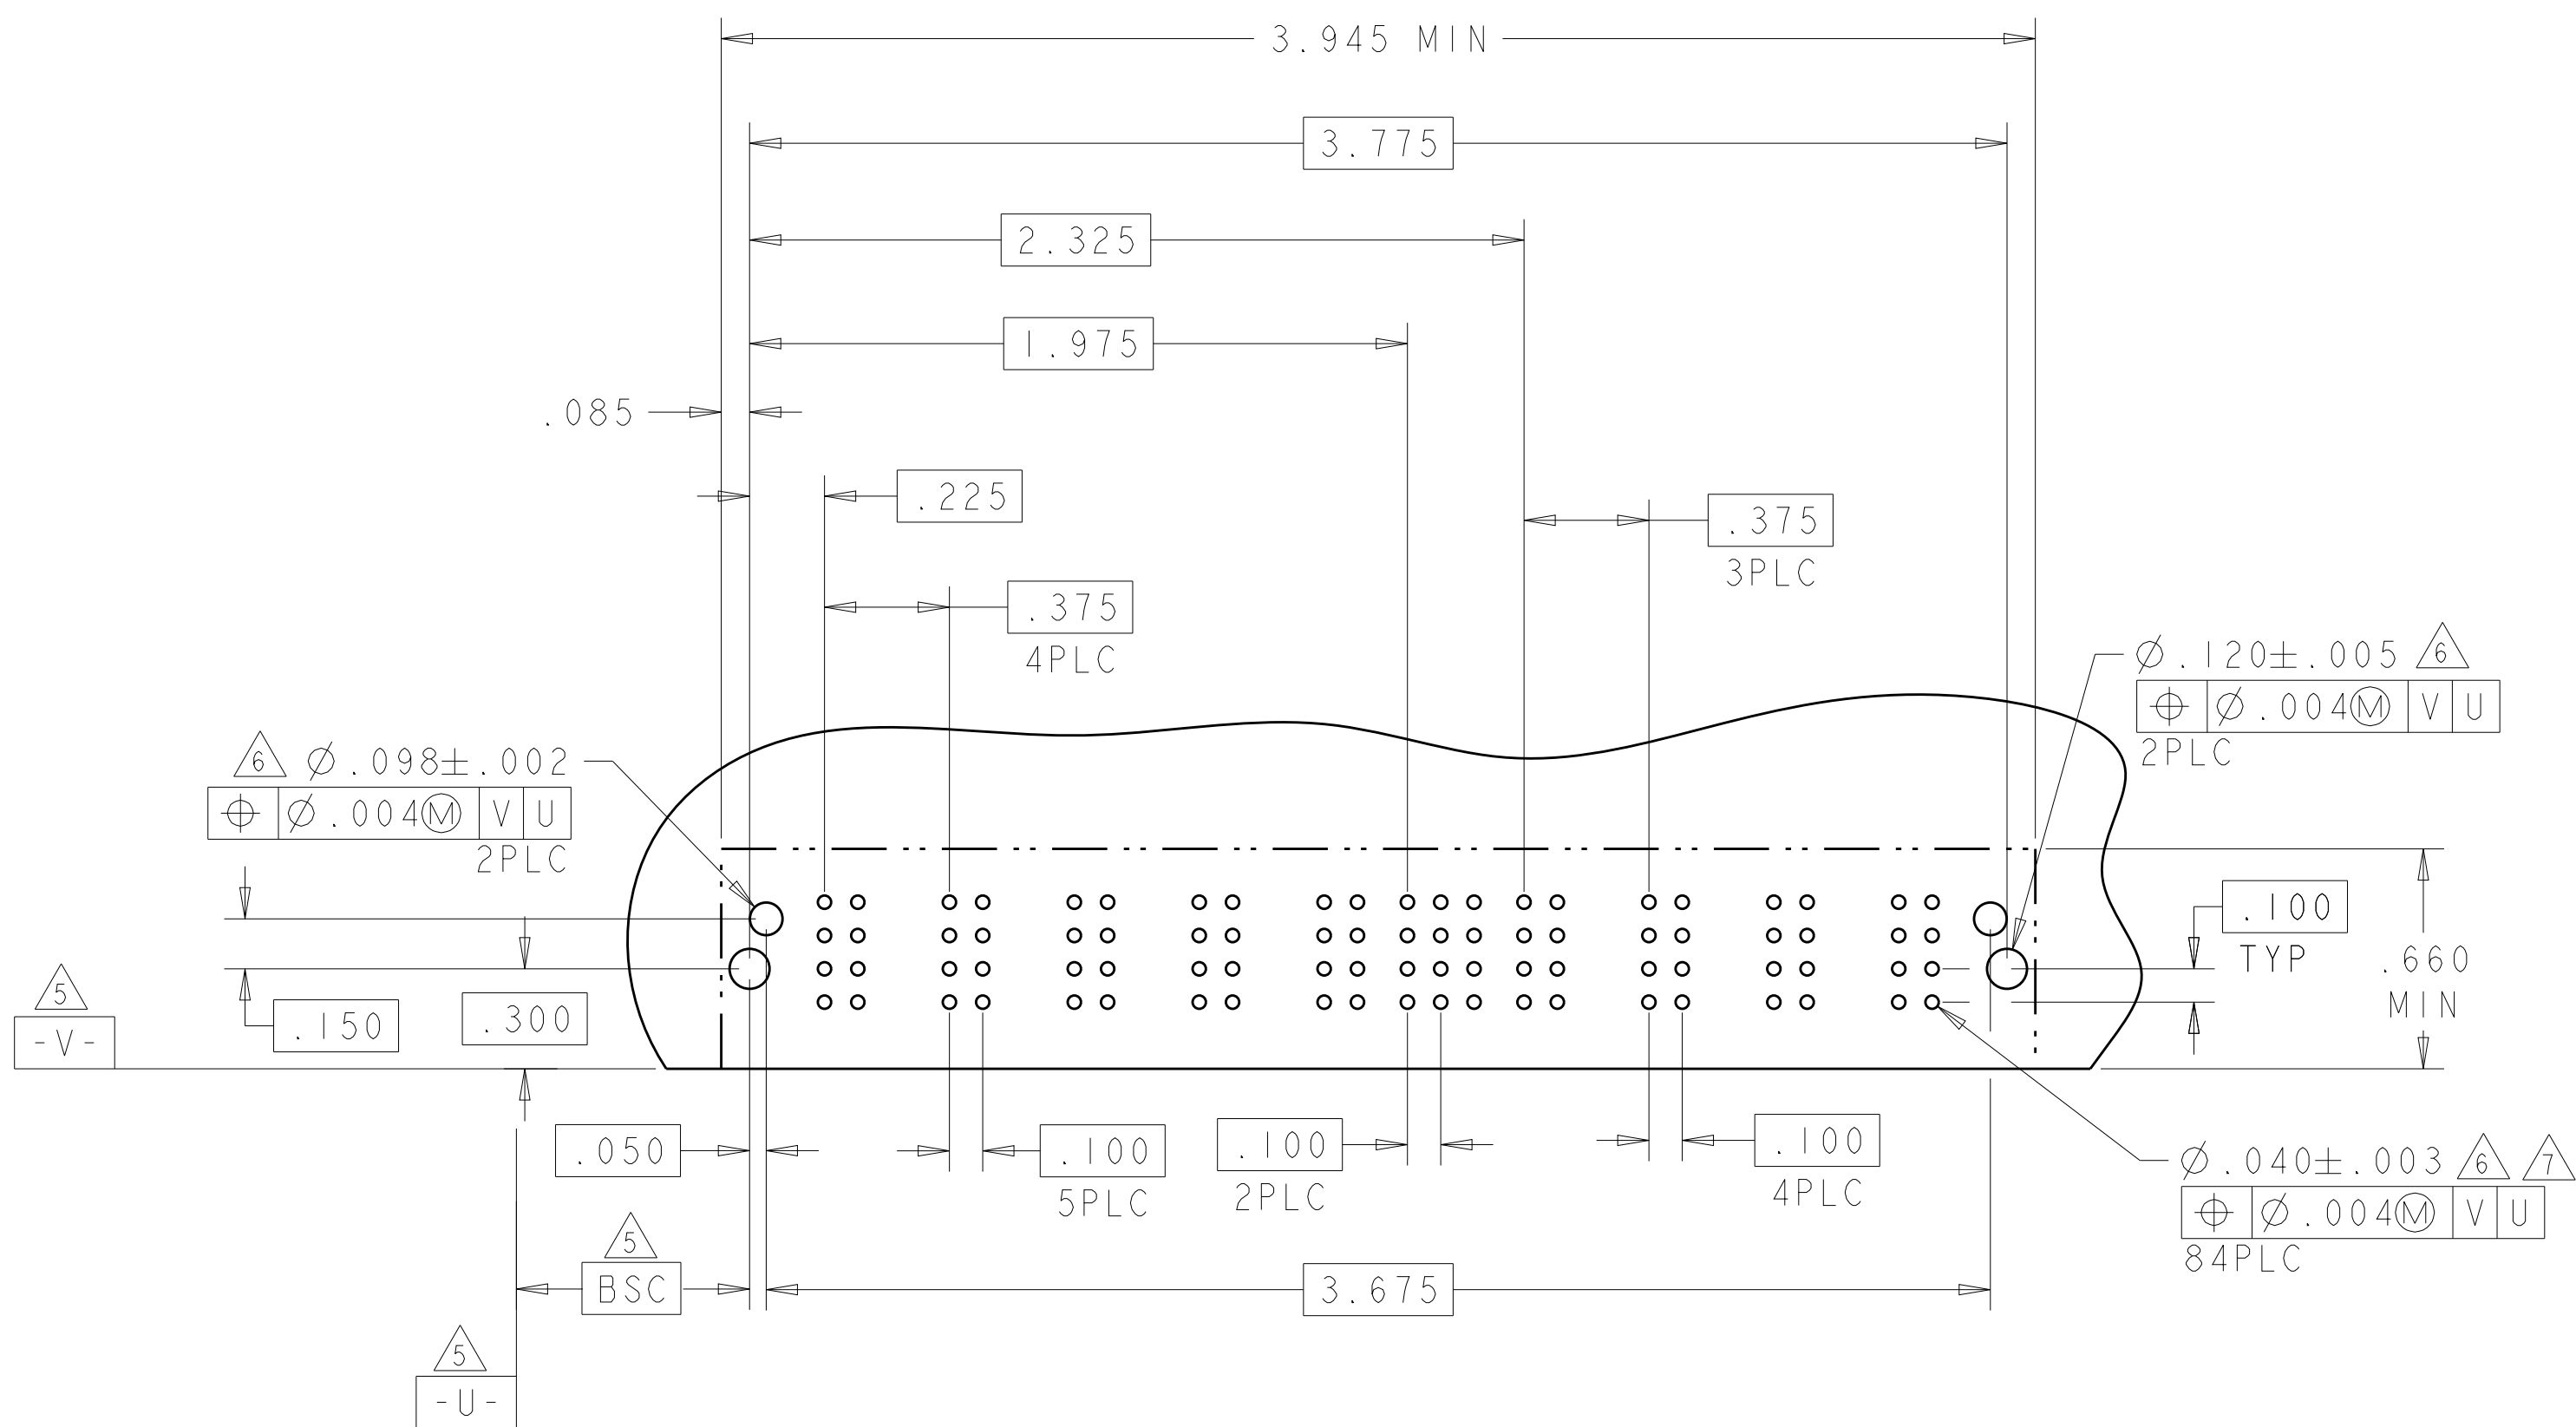4805 (3/11)


PART NUMBER	ROWS		LOW POWER		SIGNAL				LOW POWER		
			LP1	LP2	I	2	3	4	LP3	LP4	
6-6450830-0	D		LM	LM	J	J	J	E	LM	LM	
	C				K	K	K	K			
	B				N	N	N	N			
	A				S	S	S	S			

2LP + 16S + 2LP

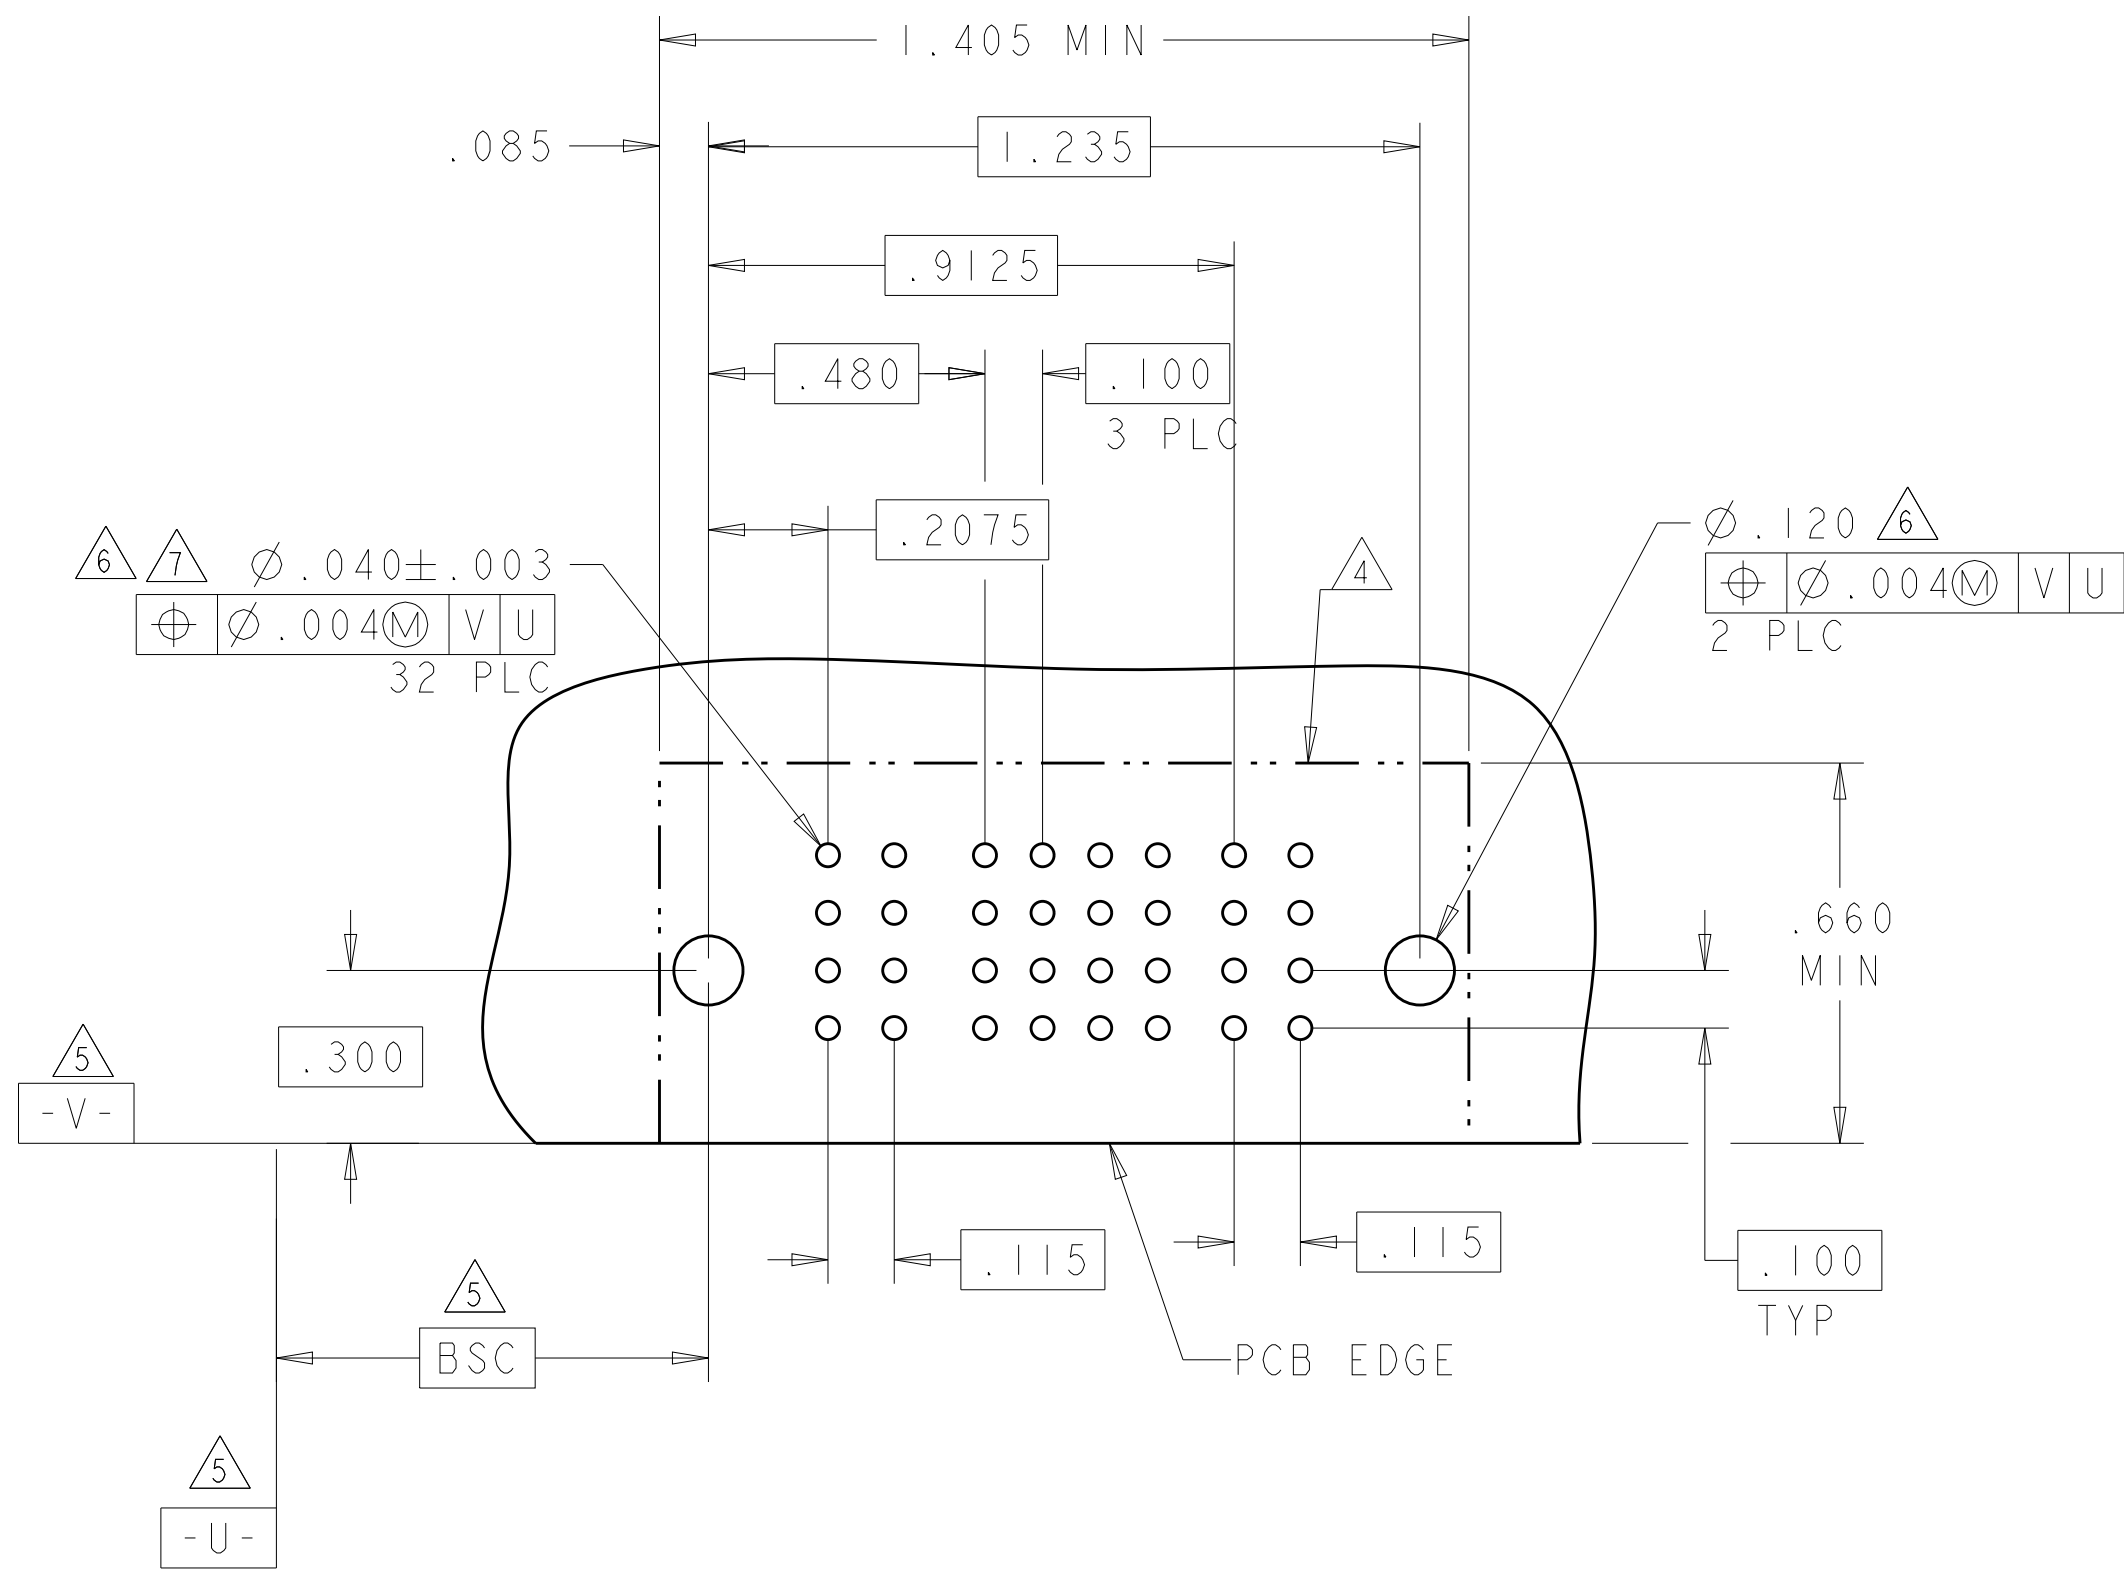
4805 (3/11)

LOC		DIST		REVISIONS				
ES	00	P	LTR	DESCRIPTION		DATE	DWN	APVD
		-		SEE SHEET 1		-	-	-

PART NUMBER	ROWS		POWER				SIGNAL			POWER															
			P1	P2	P3	P4	I	2	3	P5	P6	P7	P8	P9	P10	P11	P12	P13	P14	P15	P16		P17	P18	P19
4-6450830-3	D		TM	TM	TM	TM	J	J	J	TM	TM	TM	TM	TM	TM	TM	TM	TM	TM	TM	TM	TM	TM	TM	
	K						K	K																	
	N						N	N																	
	S						S	S																	
4P + 12S + 16P		HD																					HD		

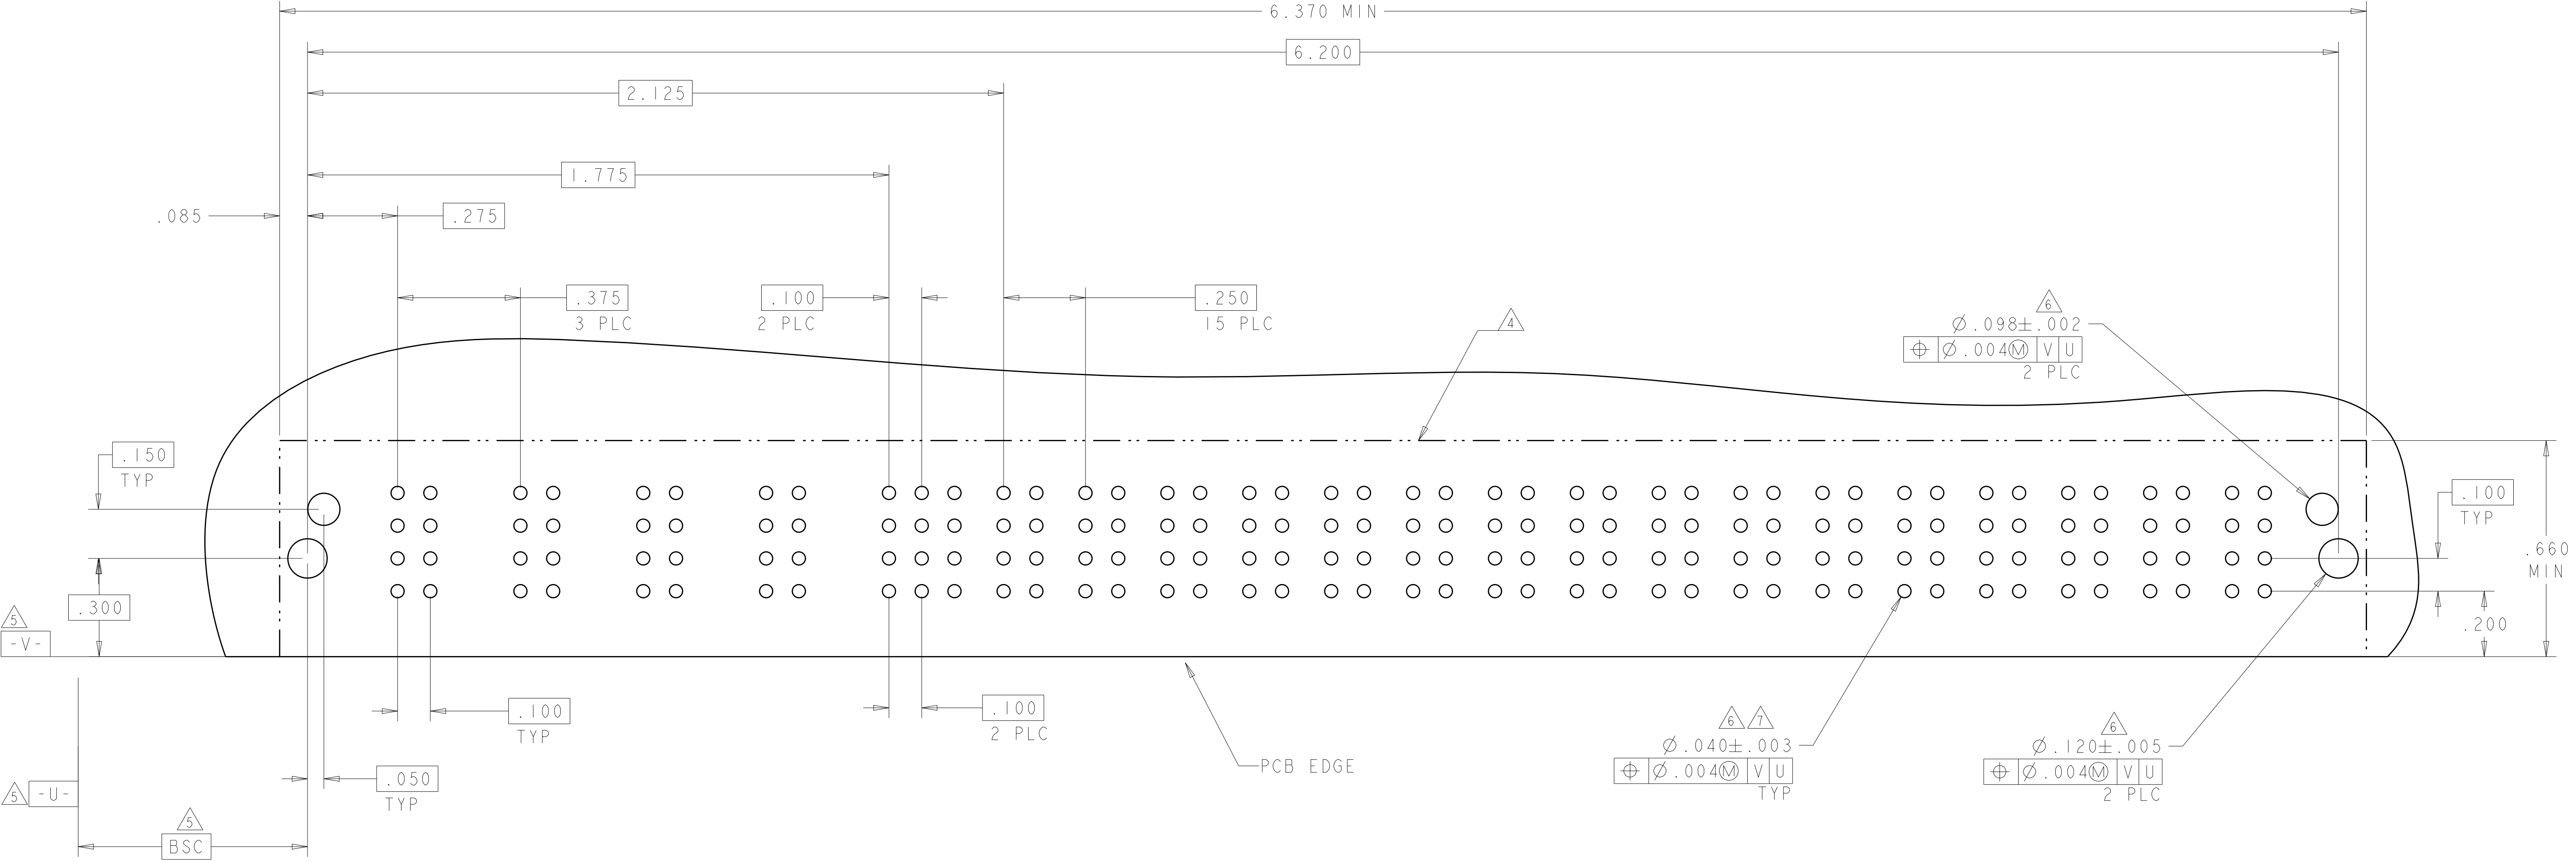



PART NUMBER	ROWS		POWER			SIGNAL						POWER			
			P1	P2	P3	1	2	3	4	5	6	P4	P5	P6	
4-6450830-5	D		TM	TM			J	J	J		TM	TM	TM		
	C						K	K	K						
	B						G	G	G						
	A						S	S	S						
3P + 24S + 3P		HD													

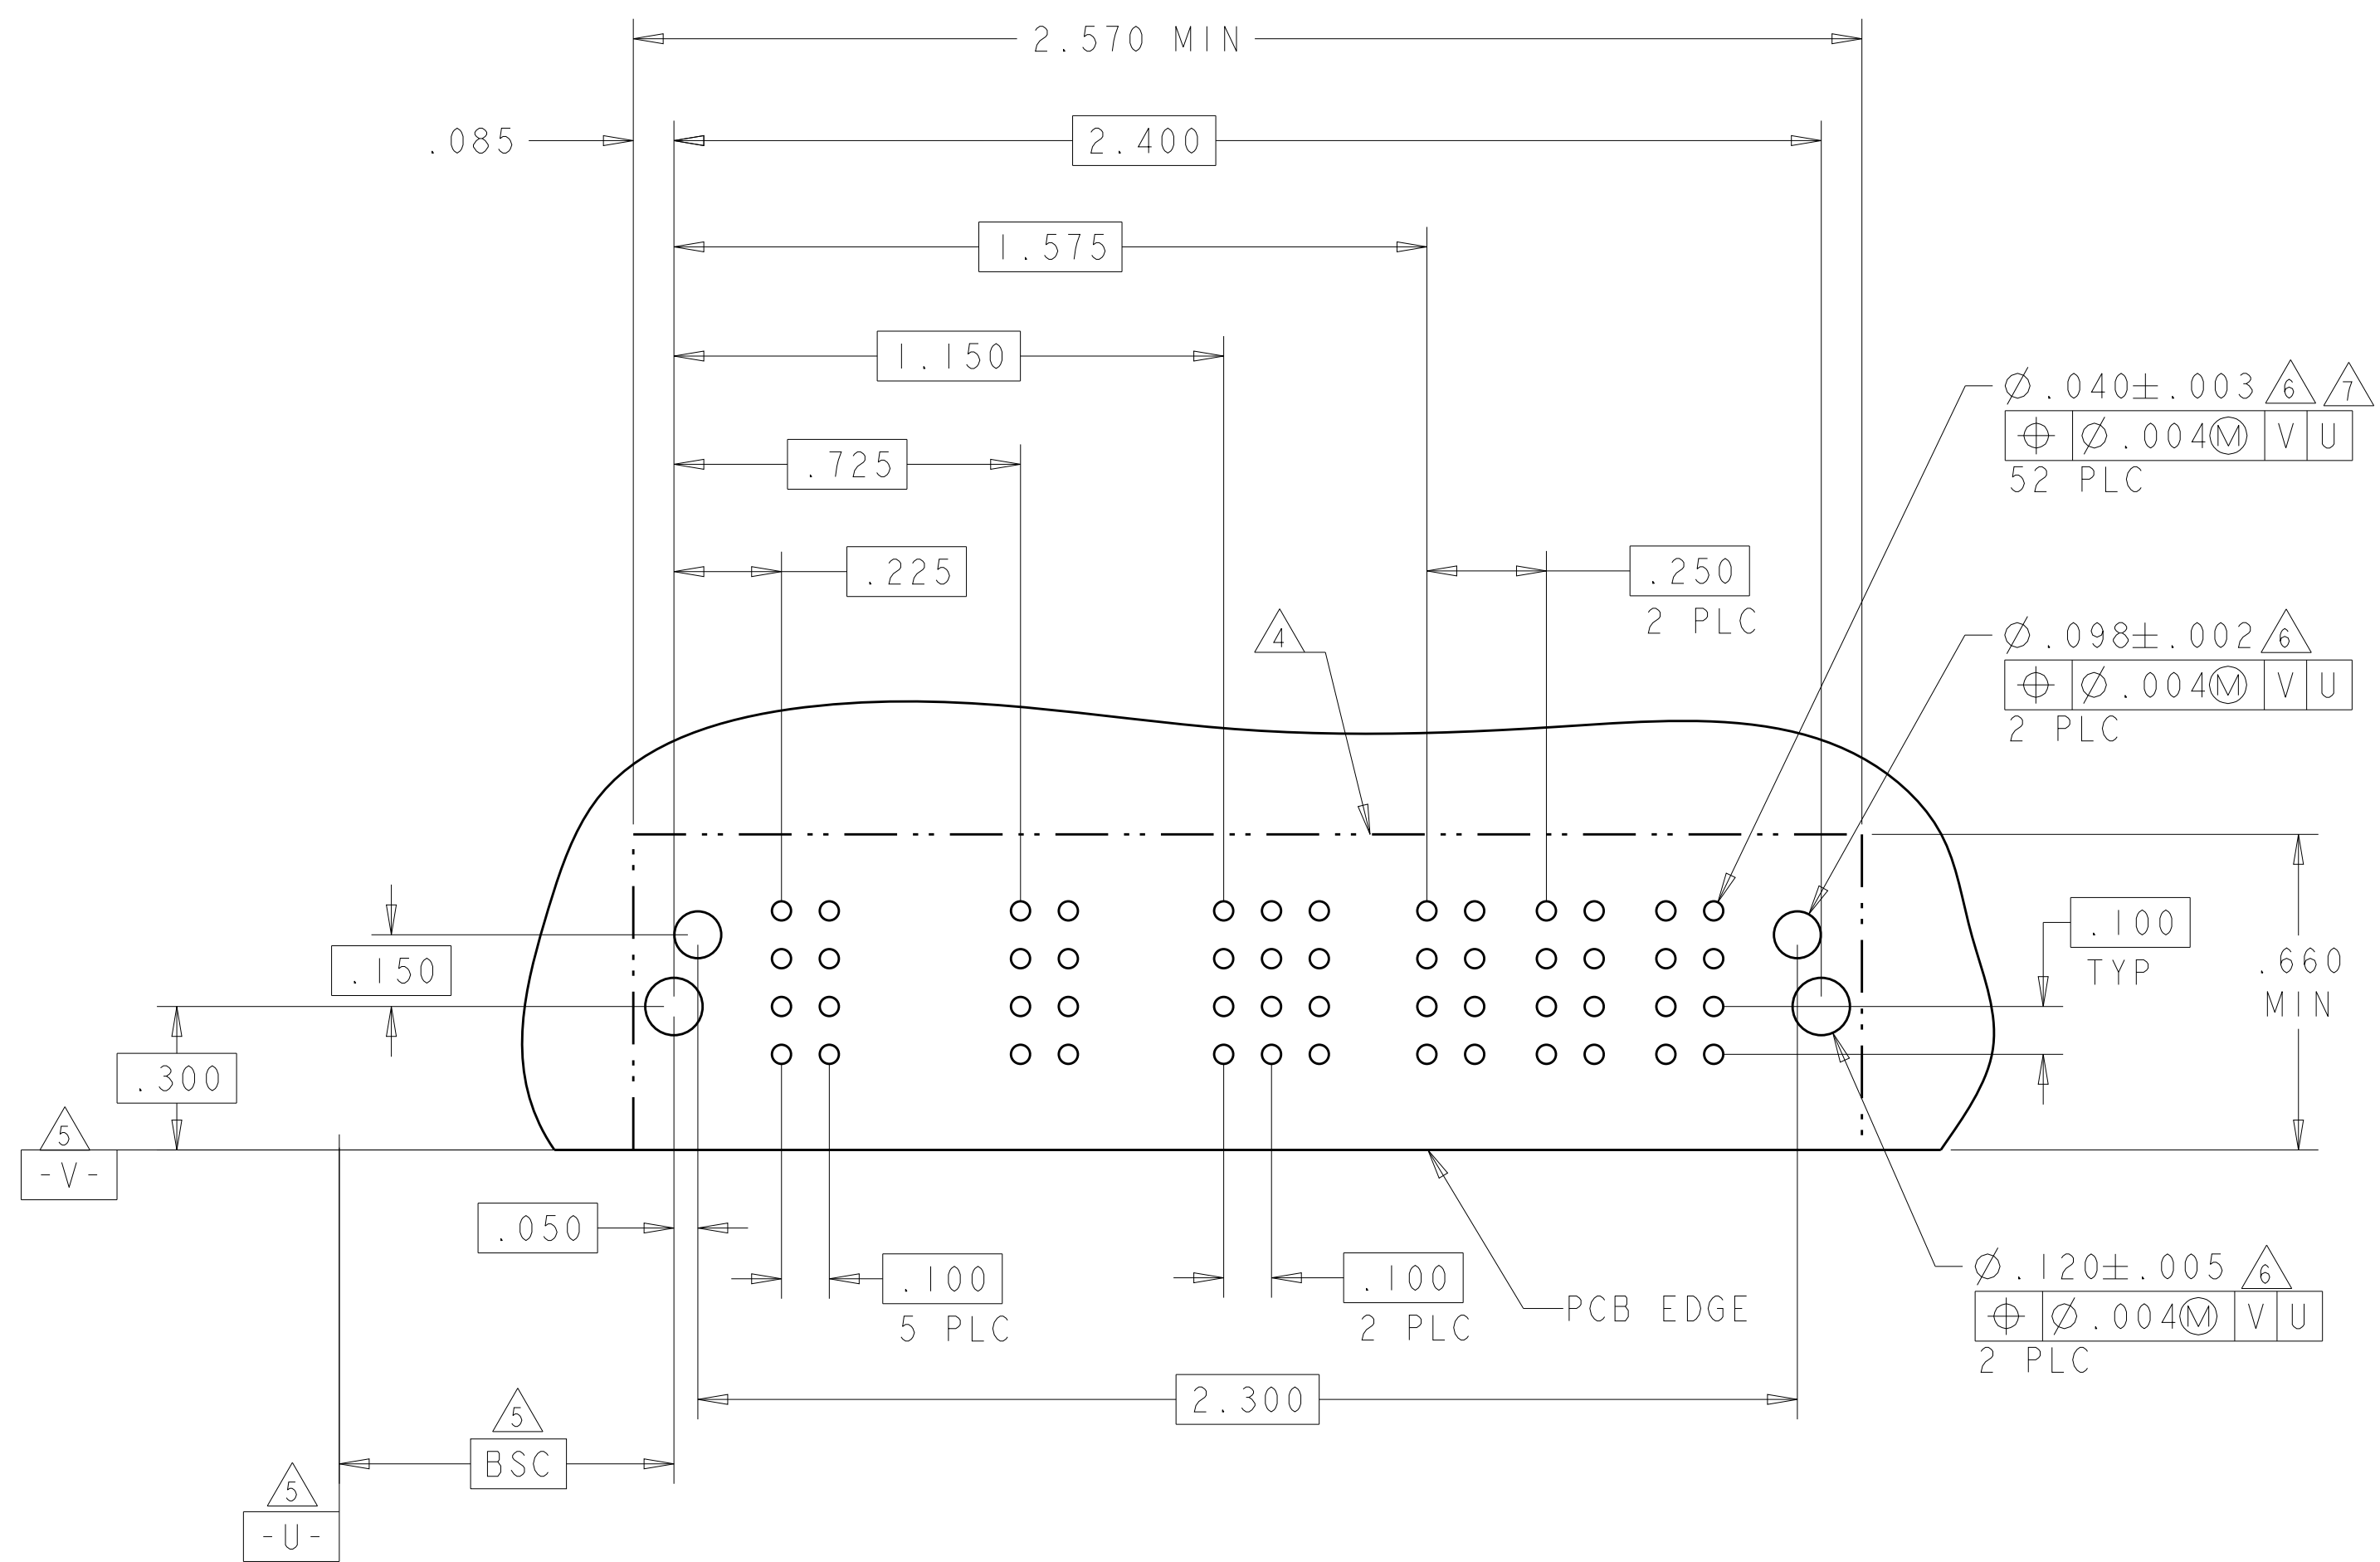4805 (3/11)







LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
ES	00	-	-	SEE SHEET 1	-	-

PART NUMBER	ROWS		POWER		SIGNAL				POWER		
			P1	P2	1	2	3	4	P3	P4	
4-6450830-6	D C B A				J	J	J	J			
					FK	FK	FK	FK			
					G	G	G	G			
					S	S	S	S			
2P + 16S + 2P											


PART NUMBER	ROWS		POWER		SIGNAL		POWER		
			P1	P2	1	2	P3	P4	
4-6450830-7	D C B A		LM	LM	F	J	TM	TM	
					K	E			
					N	N			
					S	S			
2LP + 8S + 2P			HD				HD		

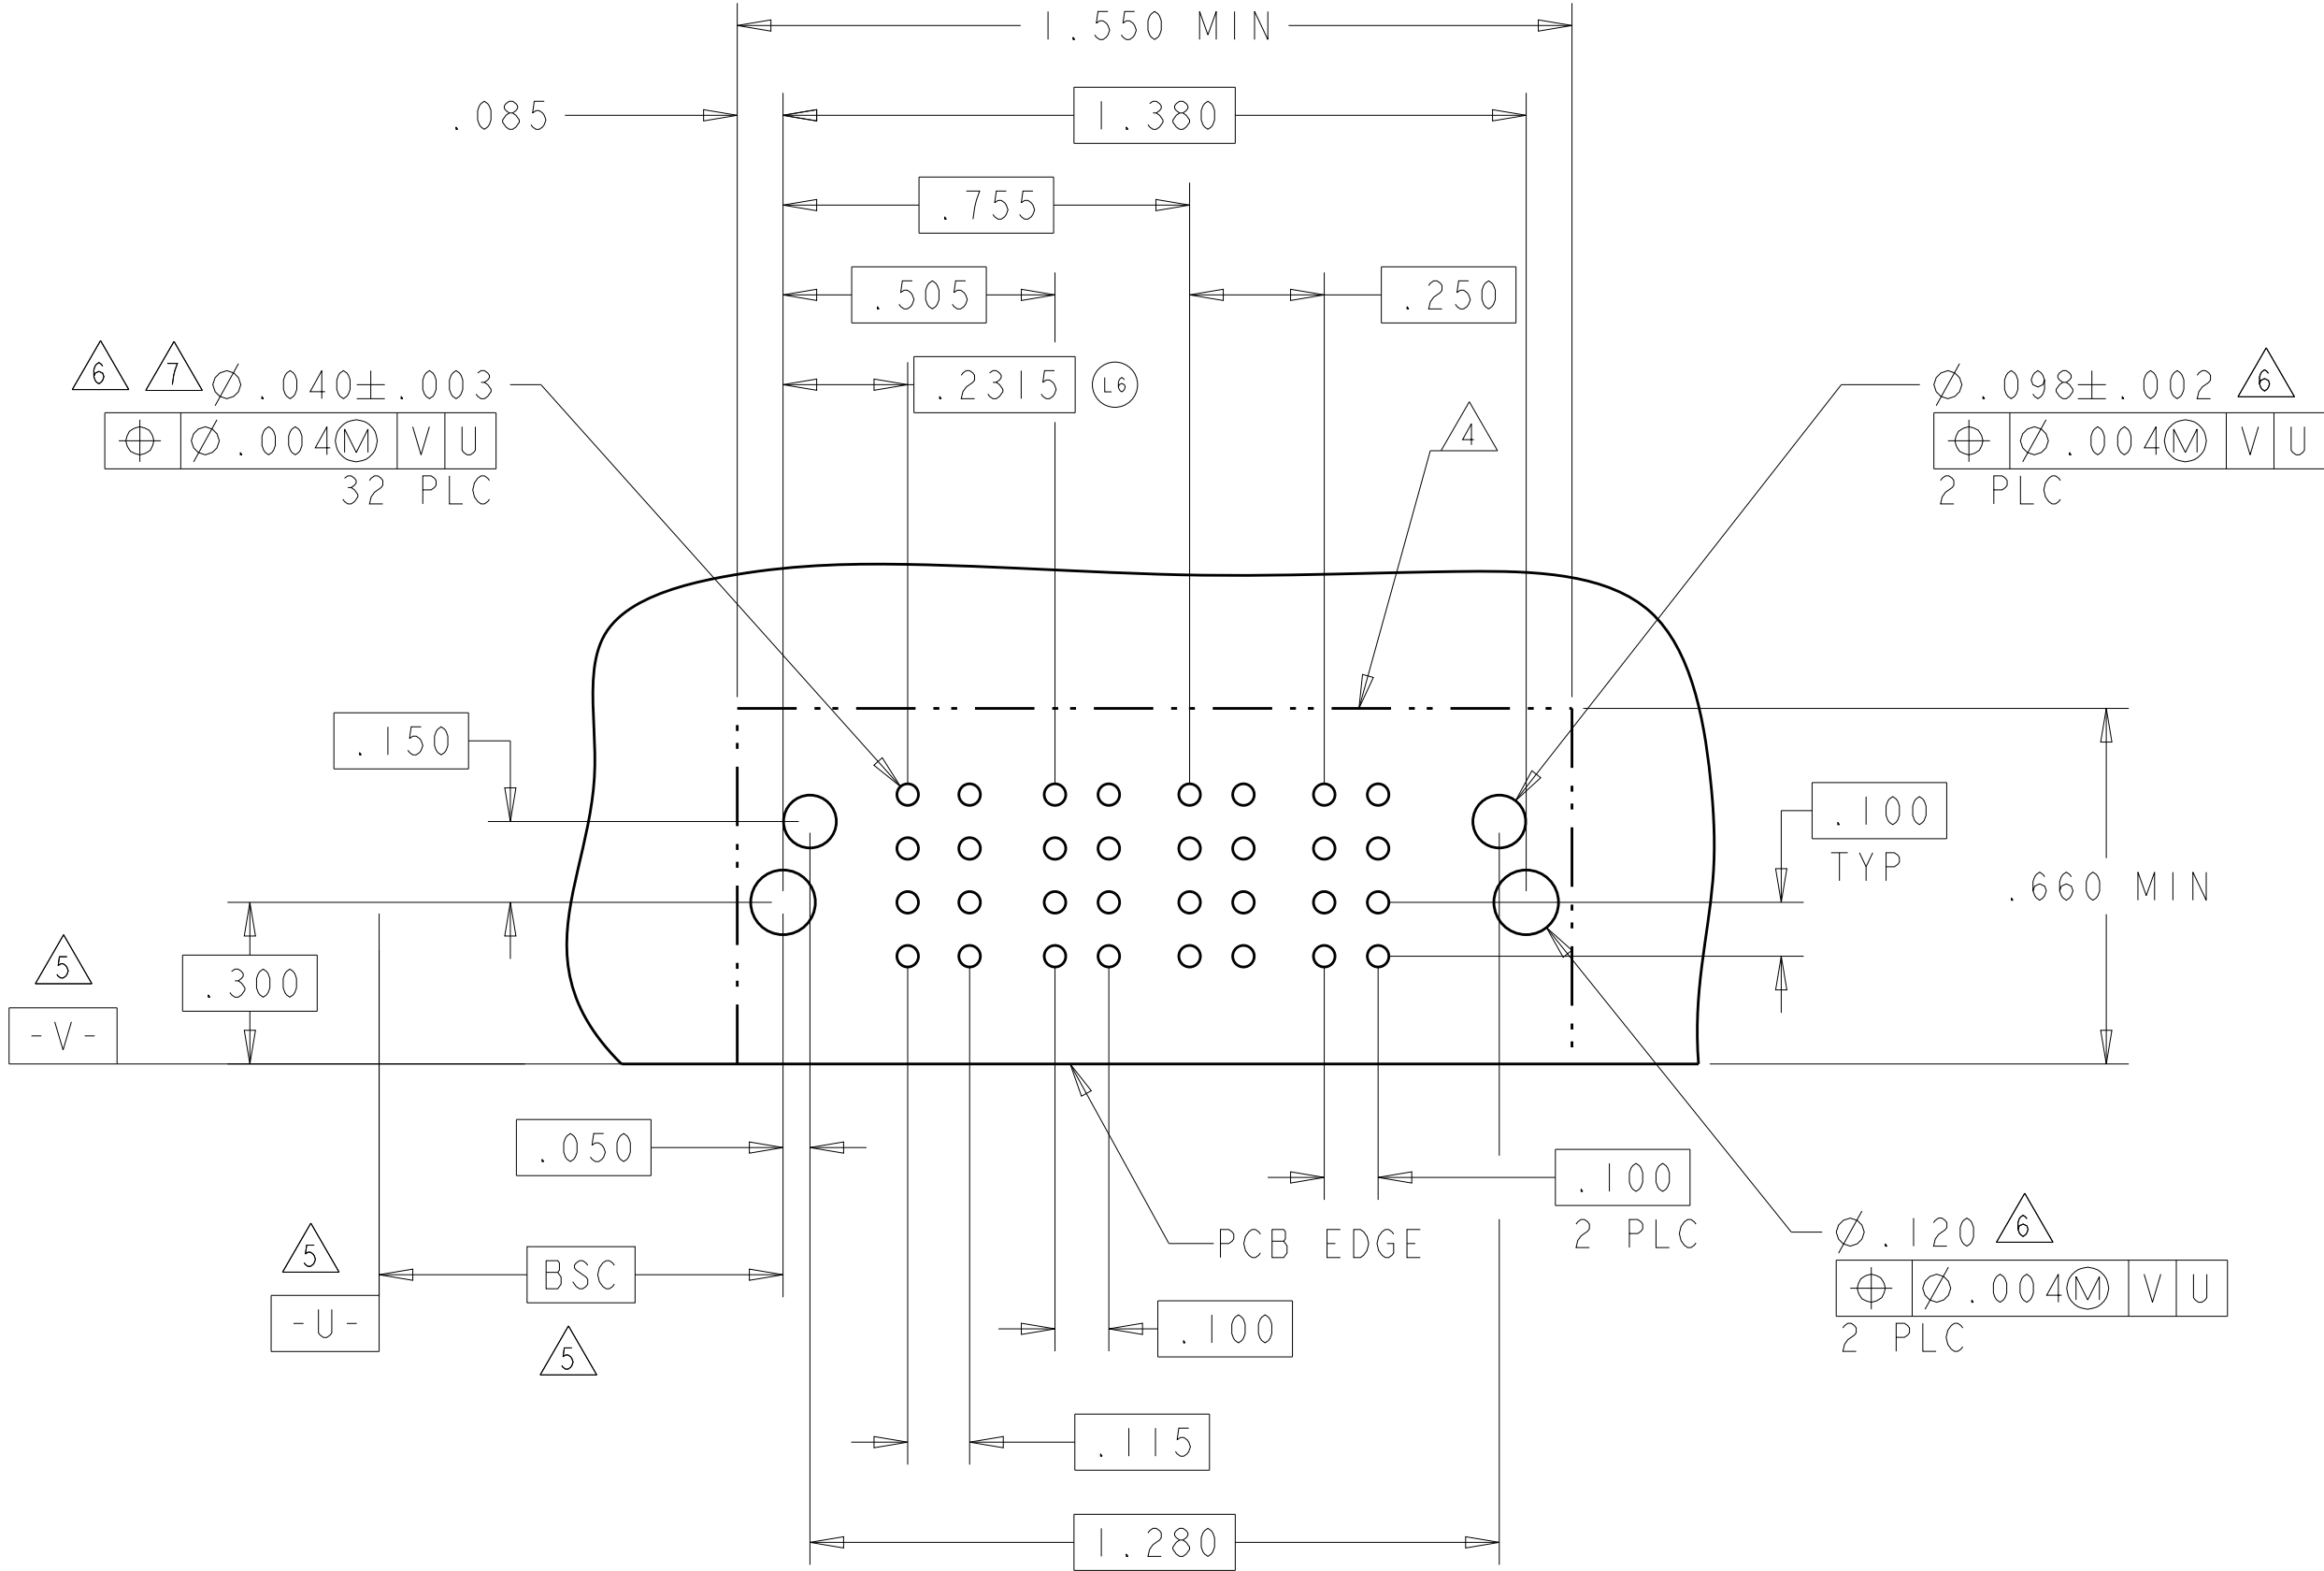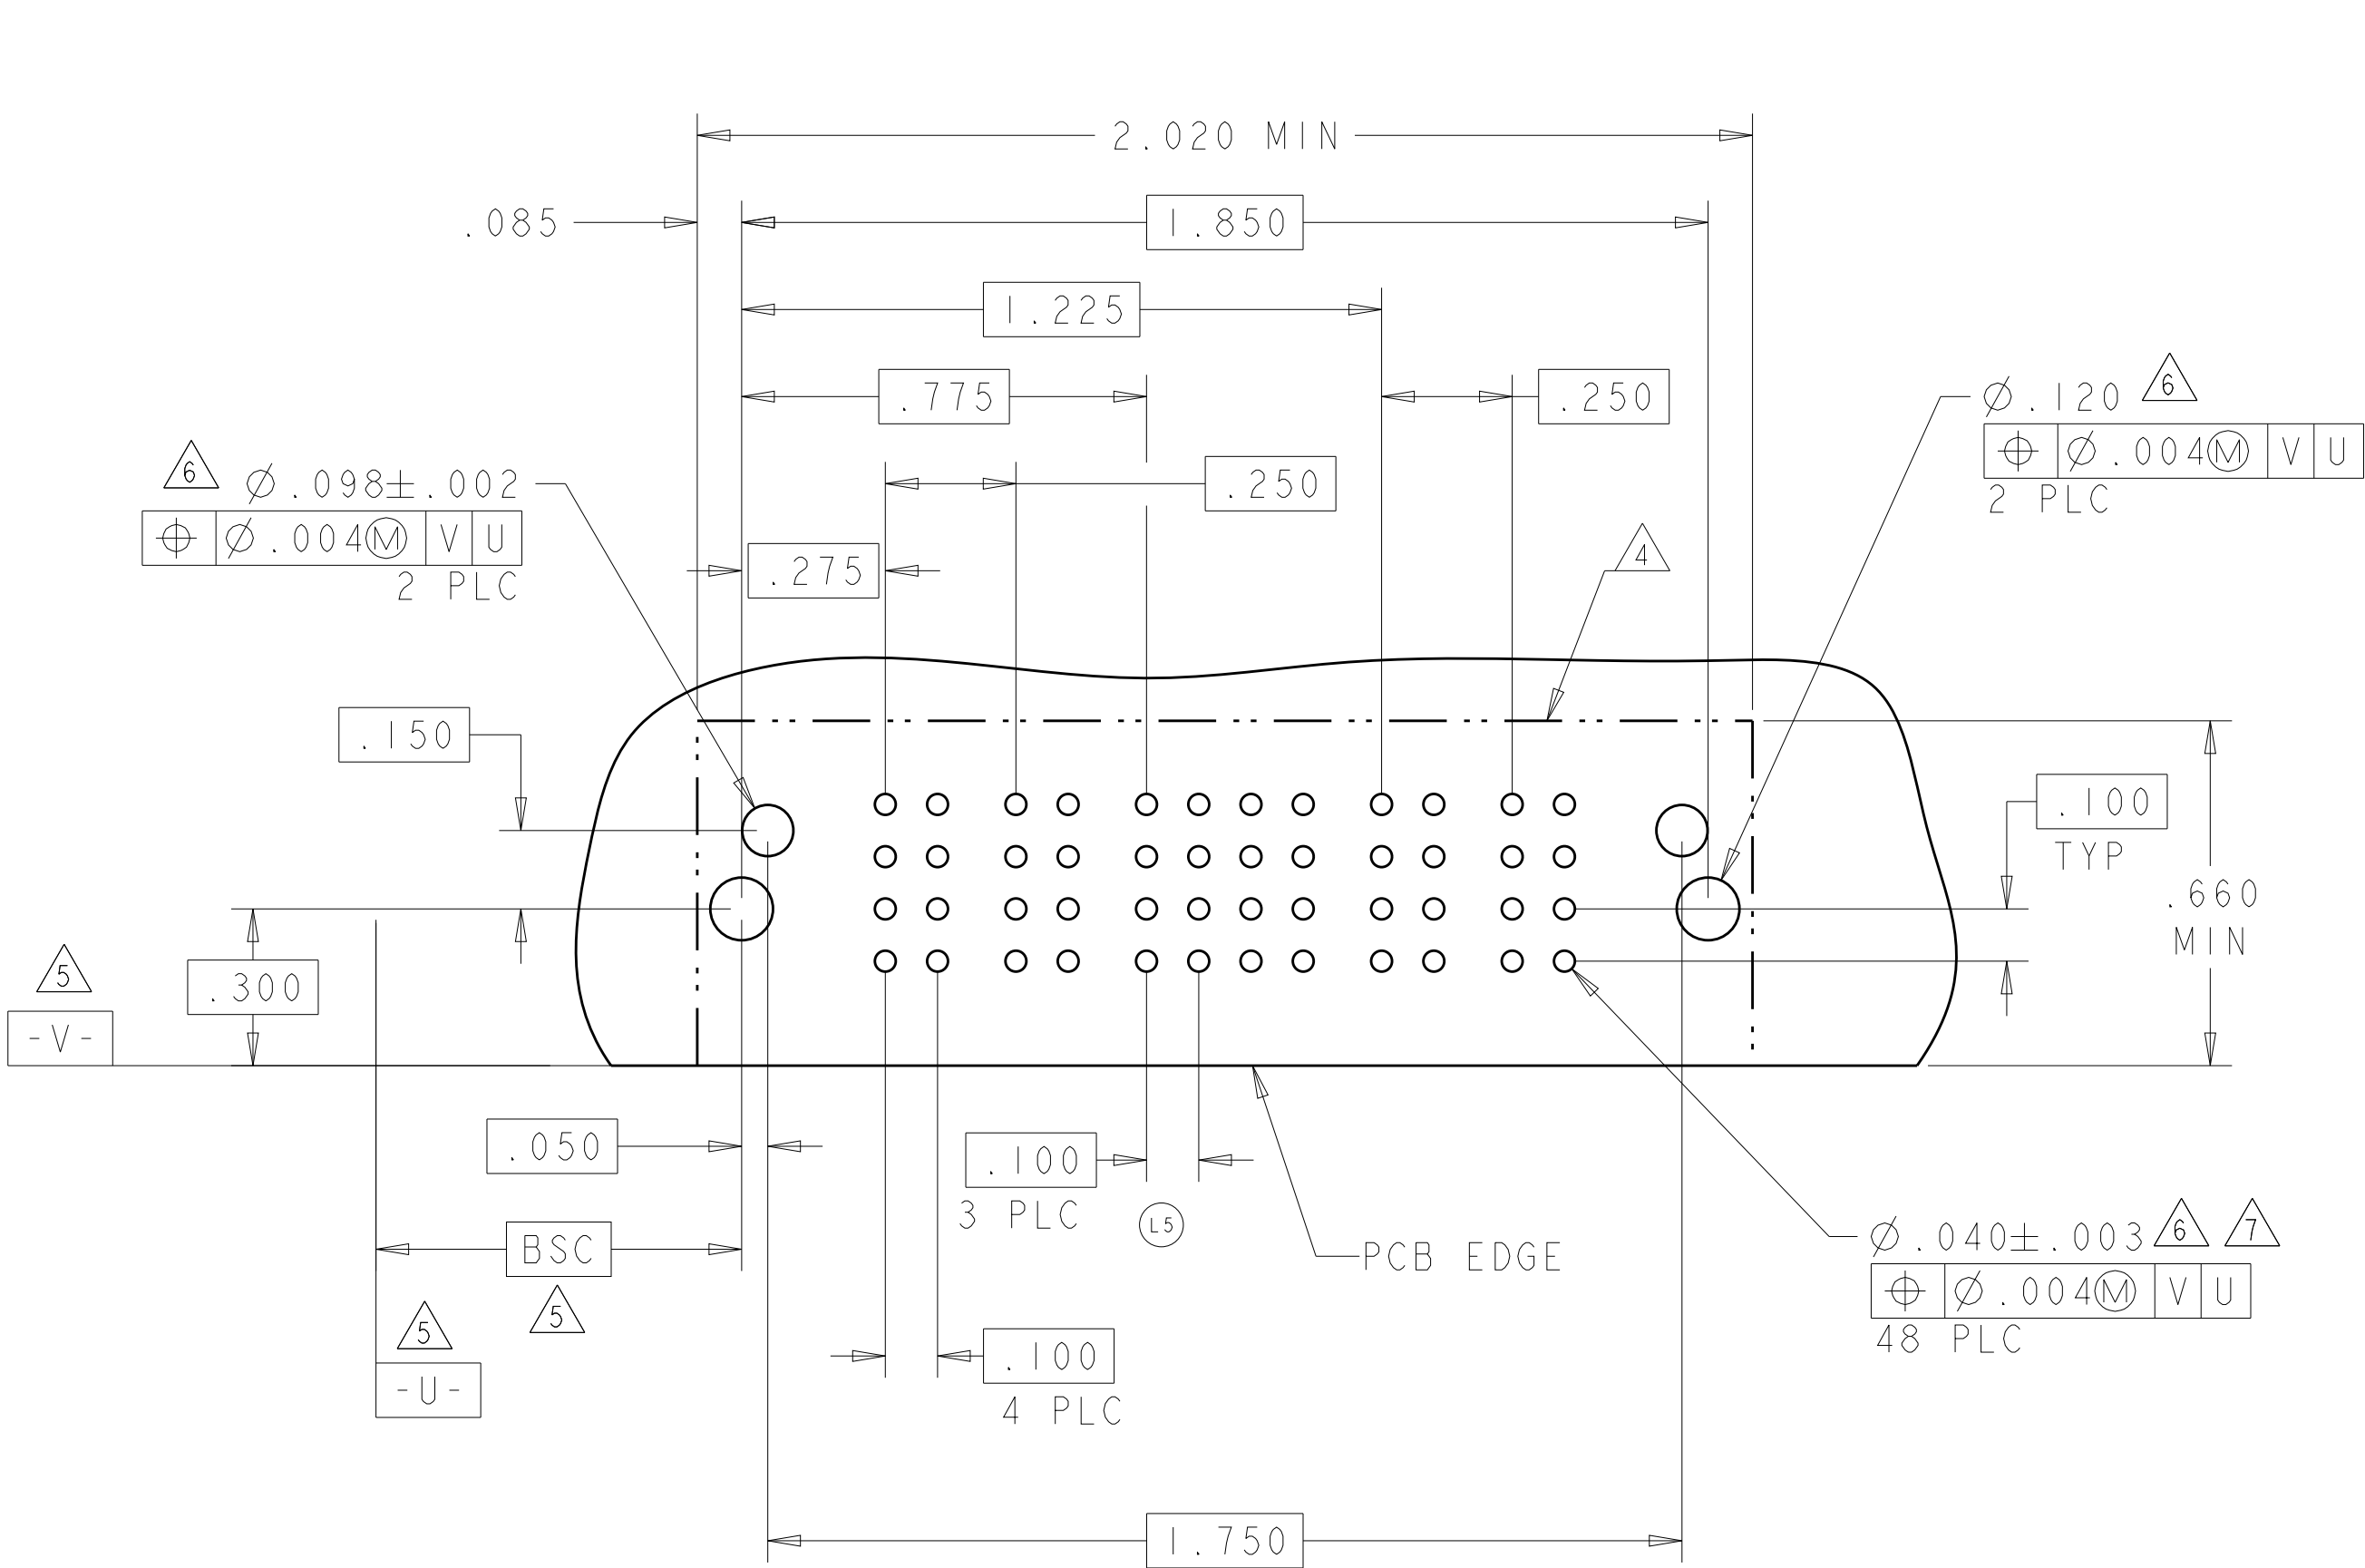

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER								SIGNAL						POWER			
			LP1	LP2	LP3	LP4	LP5	LP6	LP7	LP8	1	2	3	4	5	6	PI	P2	P3	
4-6450830-8	D C B A									J	J	J	J	J	J					
										K	K	K	K	K	K					
										N	N	N	N	N	N					
										S	S	S	S	S	S					
8LP + 24S + 3P																				

NO CONTACT LOADED

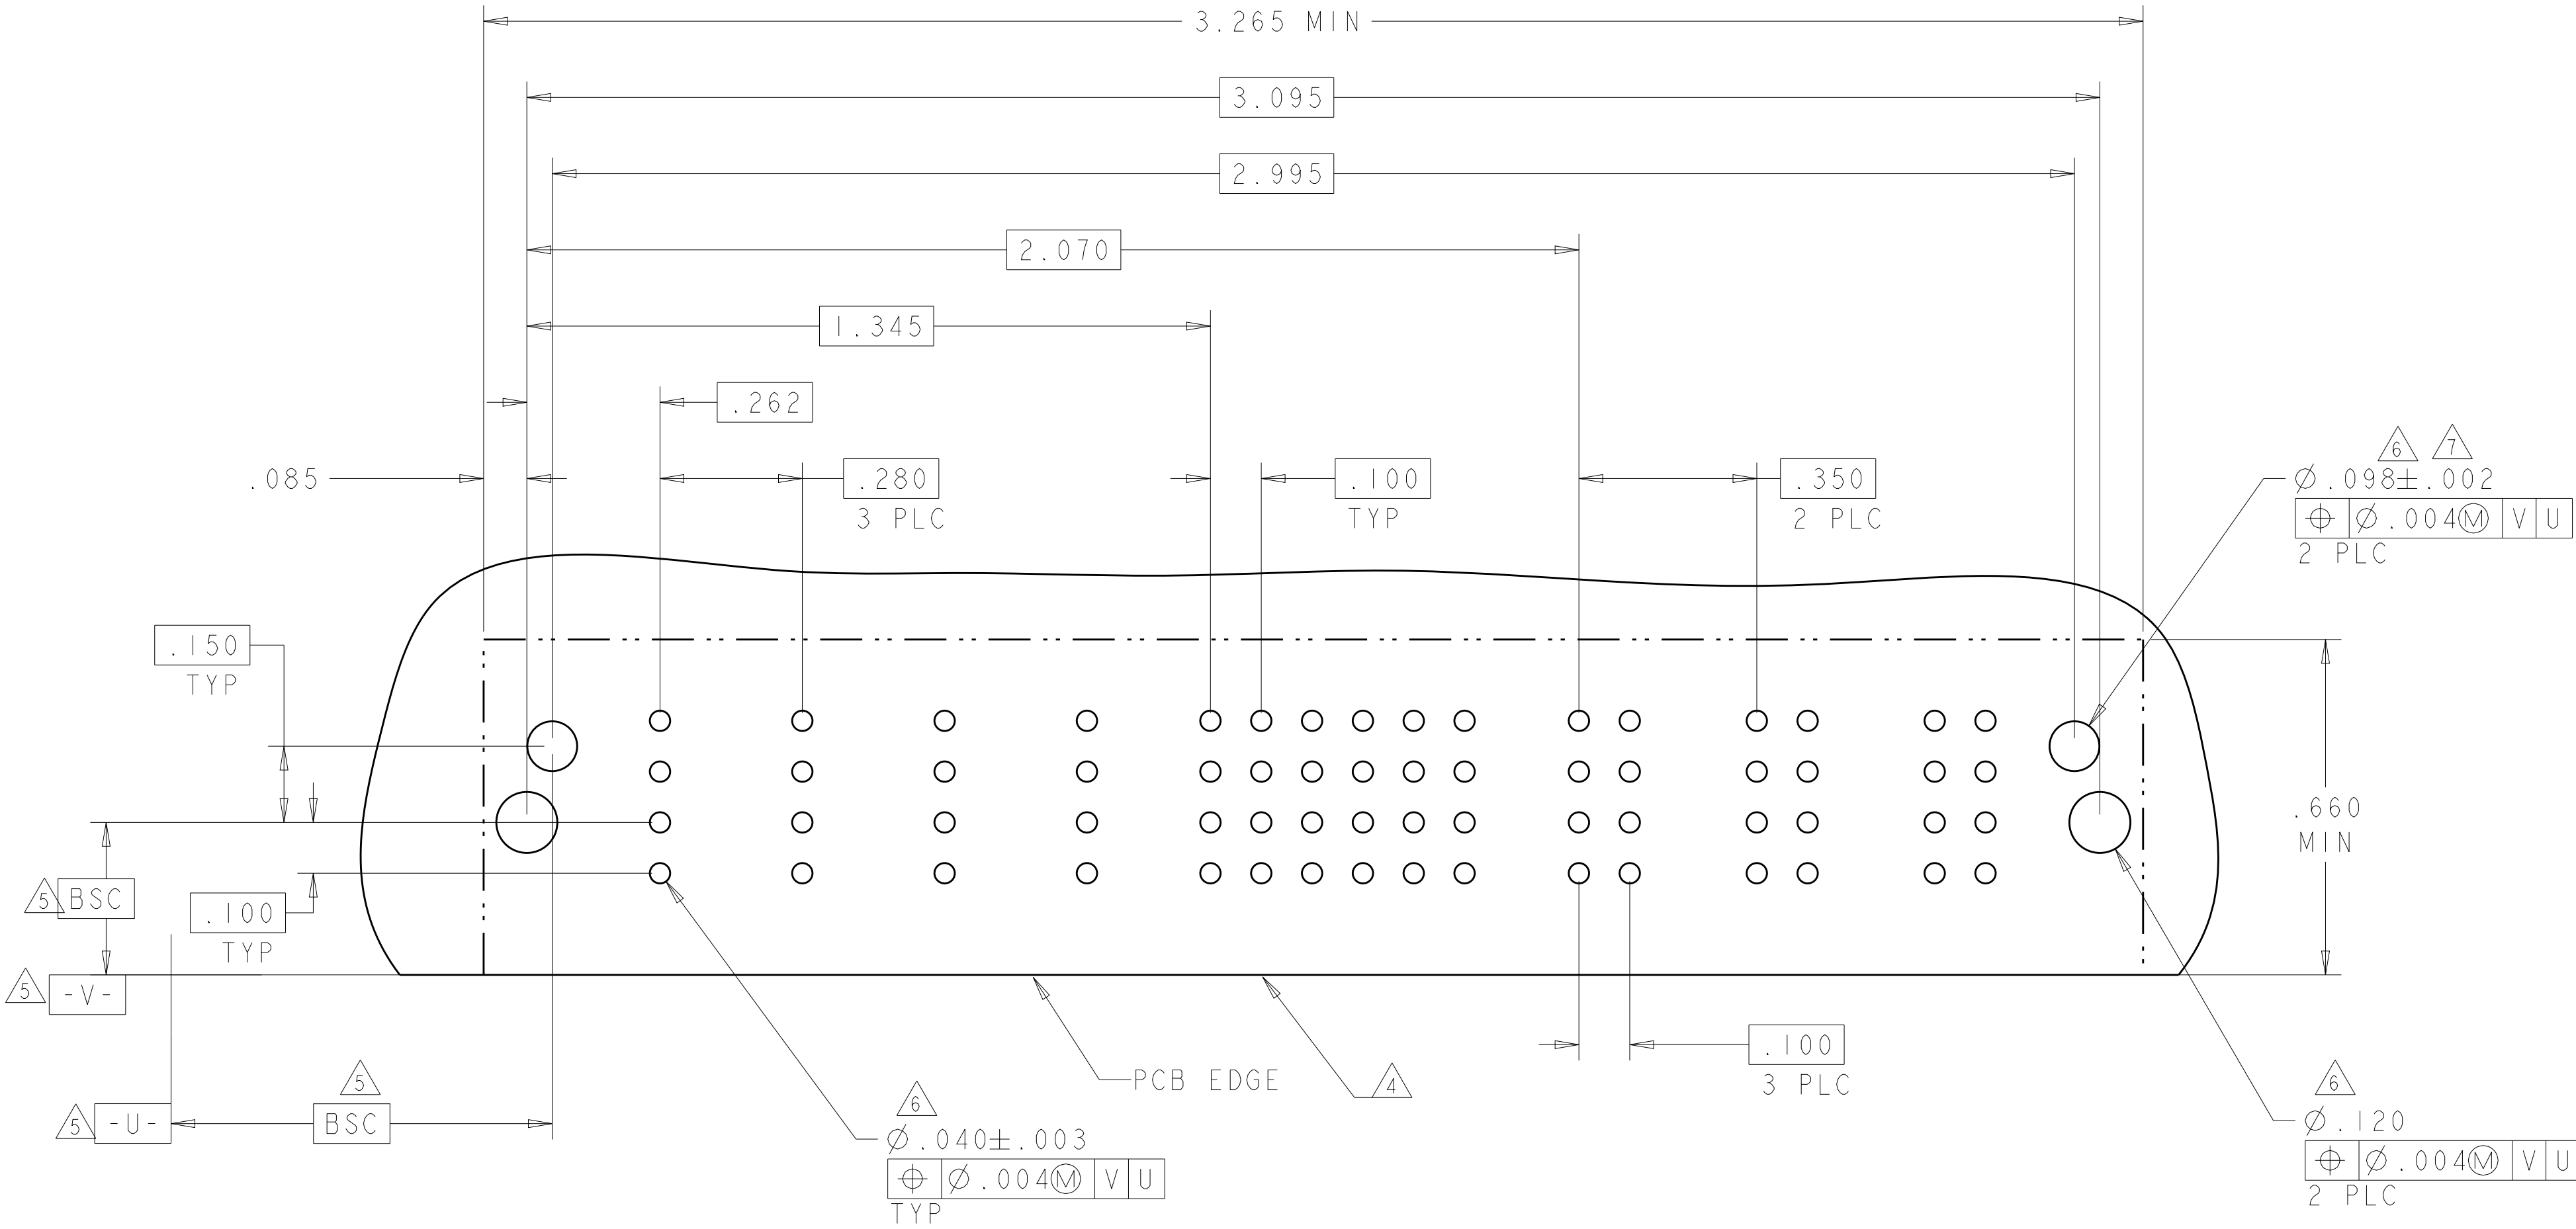

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S.ZHAO	10APR2007		
		CHK S.ZHAO	10APR2007		
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
		0 PLC ±"		PRODUCT SPEC	
		1 PLC ±.01		108-2292	
		2 PLC ±.01		APPLICATION SPEC	
		3 PLC ±.005		114-13251	
		4 PLC ±.0020		WEIGHT	
		ANGLES ±2°		CUSTOMER DRAWING	
MATERIAL		FINISH		SCALE	
-		-		4:1	
				SHEET 24 OF 42	
				REV S2	

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
ES	00	-	-	SEE SHEET 1	-	-



L 8

PART NUMBER	ROWS		POWER			SIGNAL						POWER			
			P1	P2	P3	1	2	3	4	5	6	P4	P5	P6	
4-6450830-9	D		TM	TM					J	J		TM	TM	TM	
	C								K	K					
	B								G	G					
	A								S	S					
3P + 24S + 3P															


NO CONTACT LOADED

M


PART NUMBER	ROWS		POWER		SIGNAL		POWER			
			P1	P2	1	2	P3	P4	P5	
5-6450830-0	D		LM	LM	J	J	LMF	LMF	LMF	
	C				K	K				
	B				N	N				
	A				S	S				
2LP + 8S + 3LP										

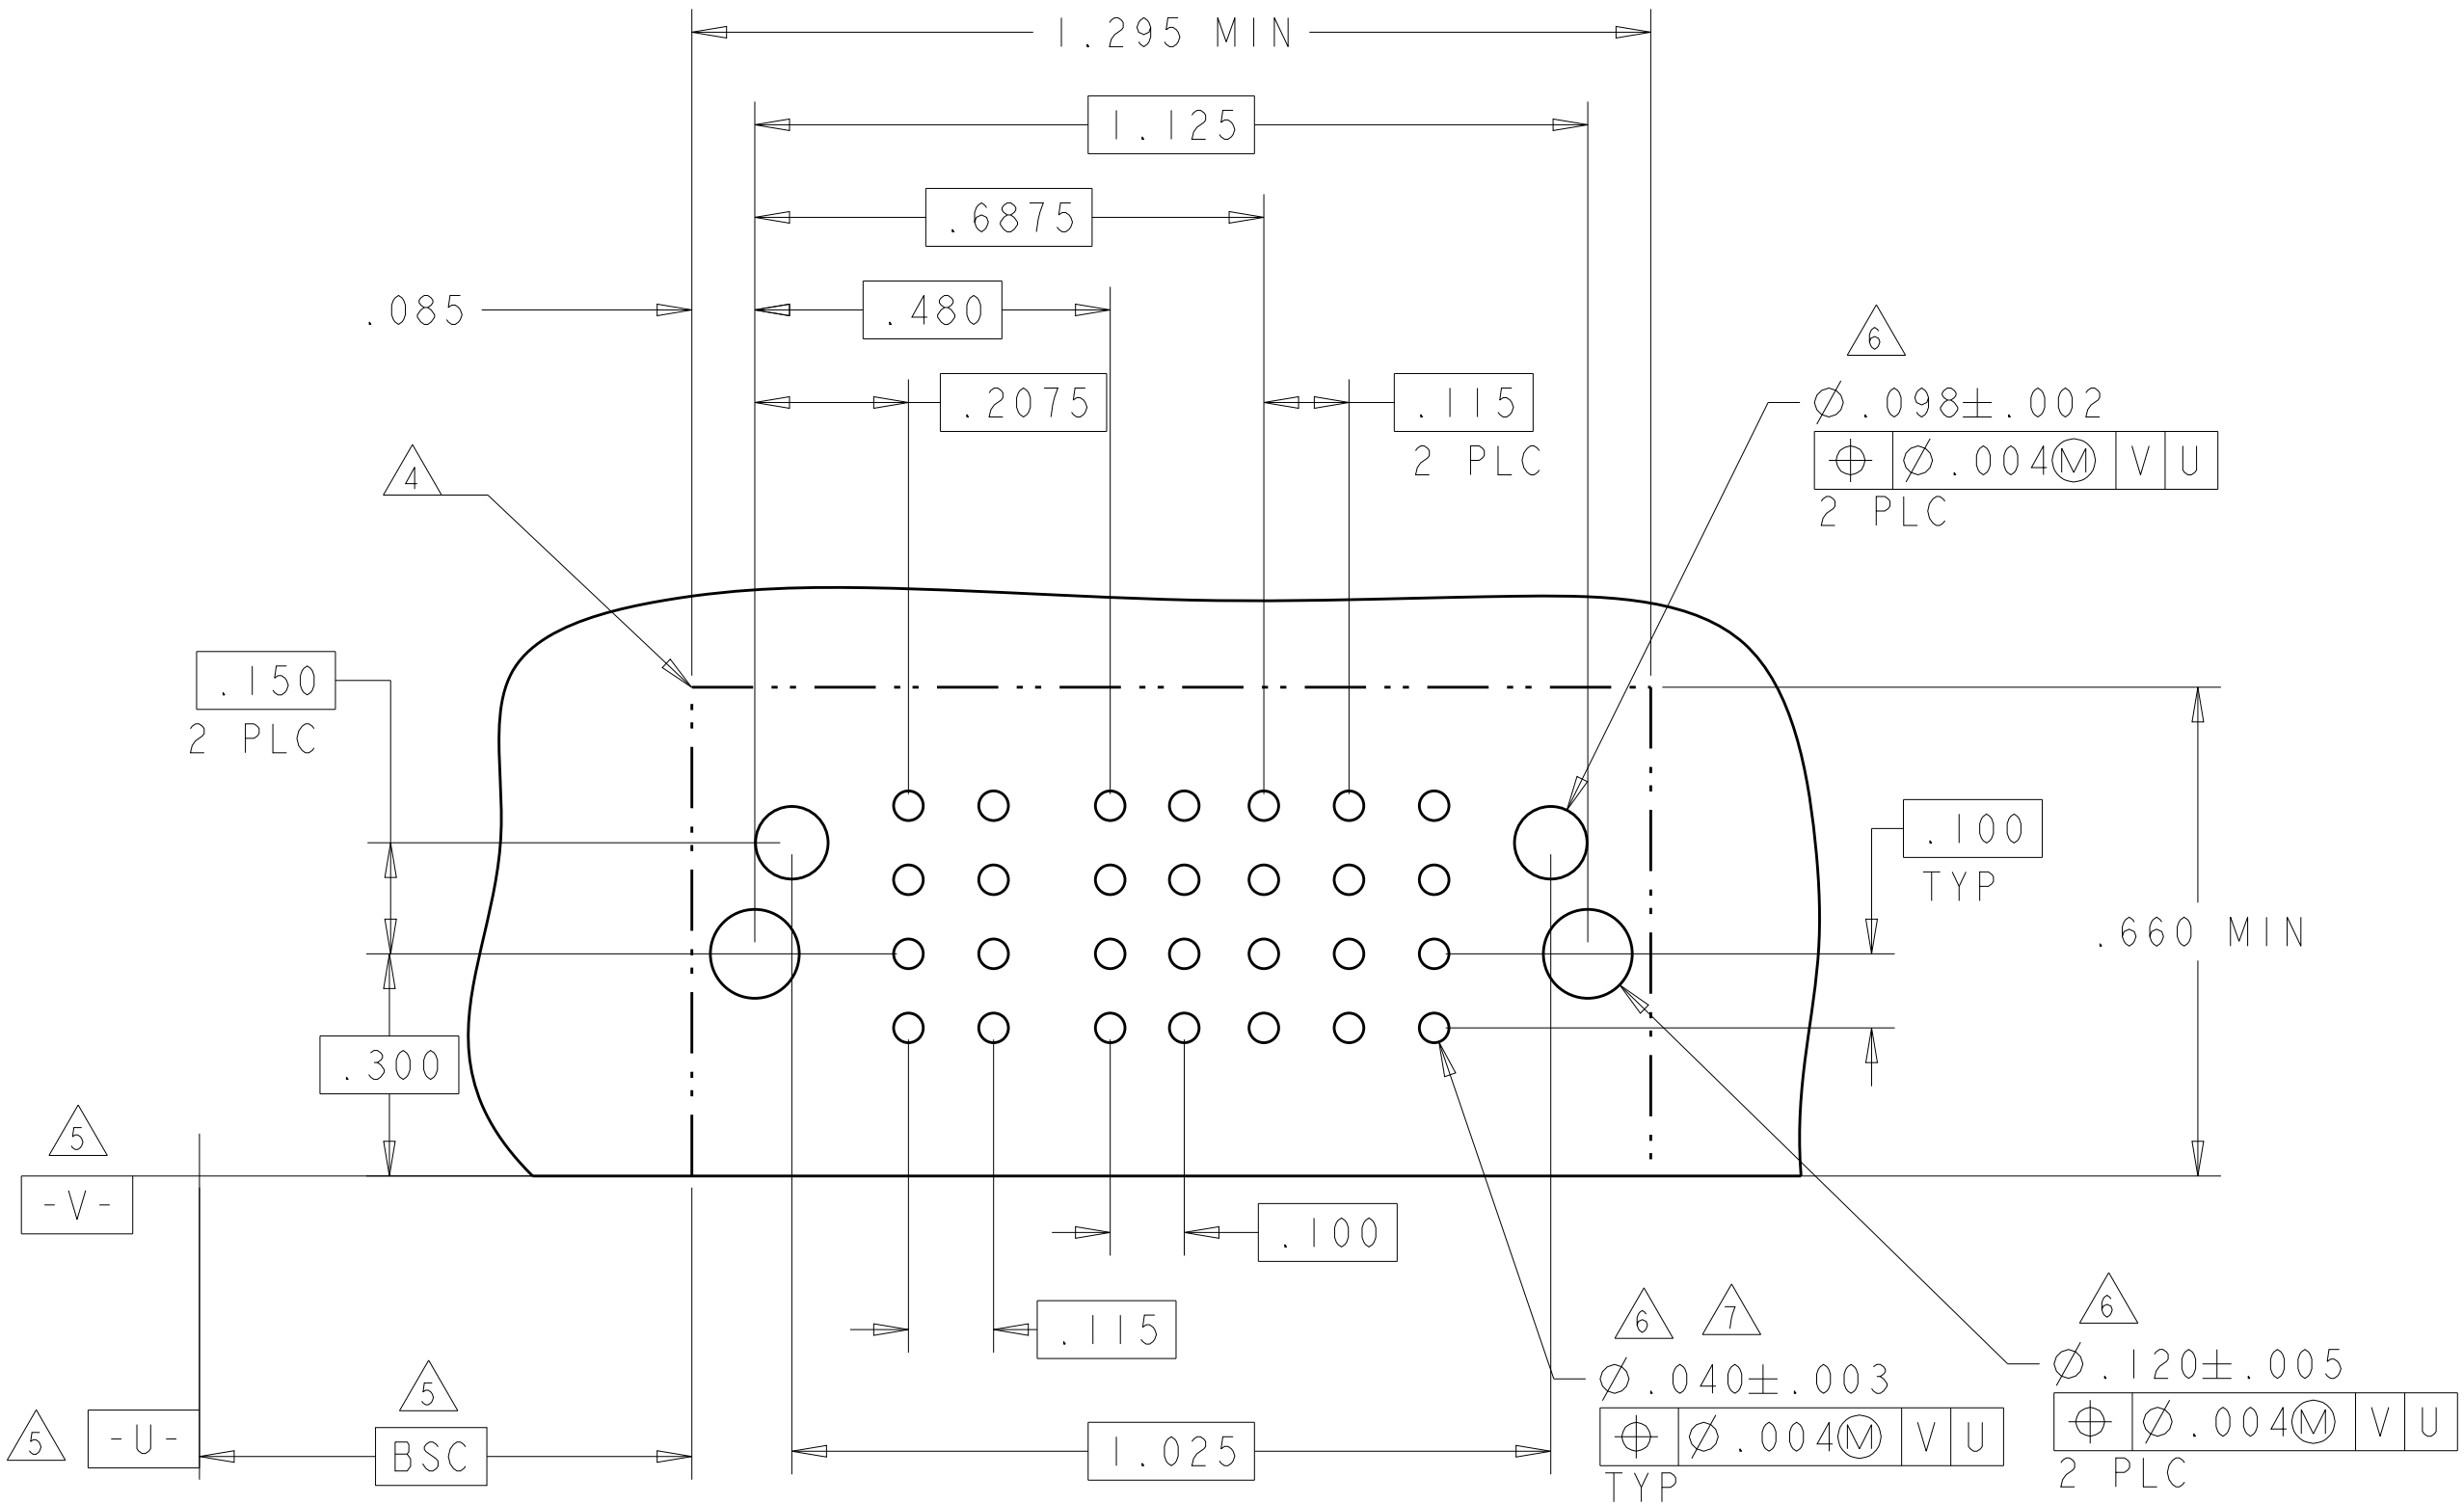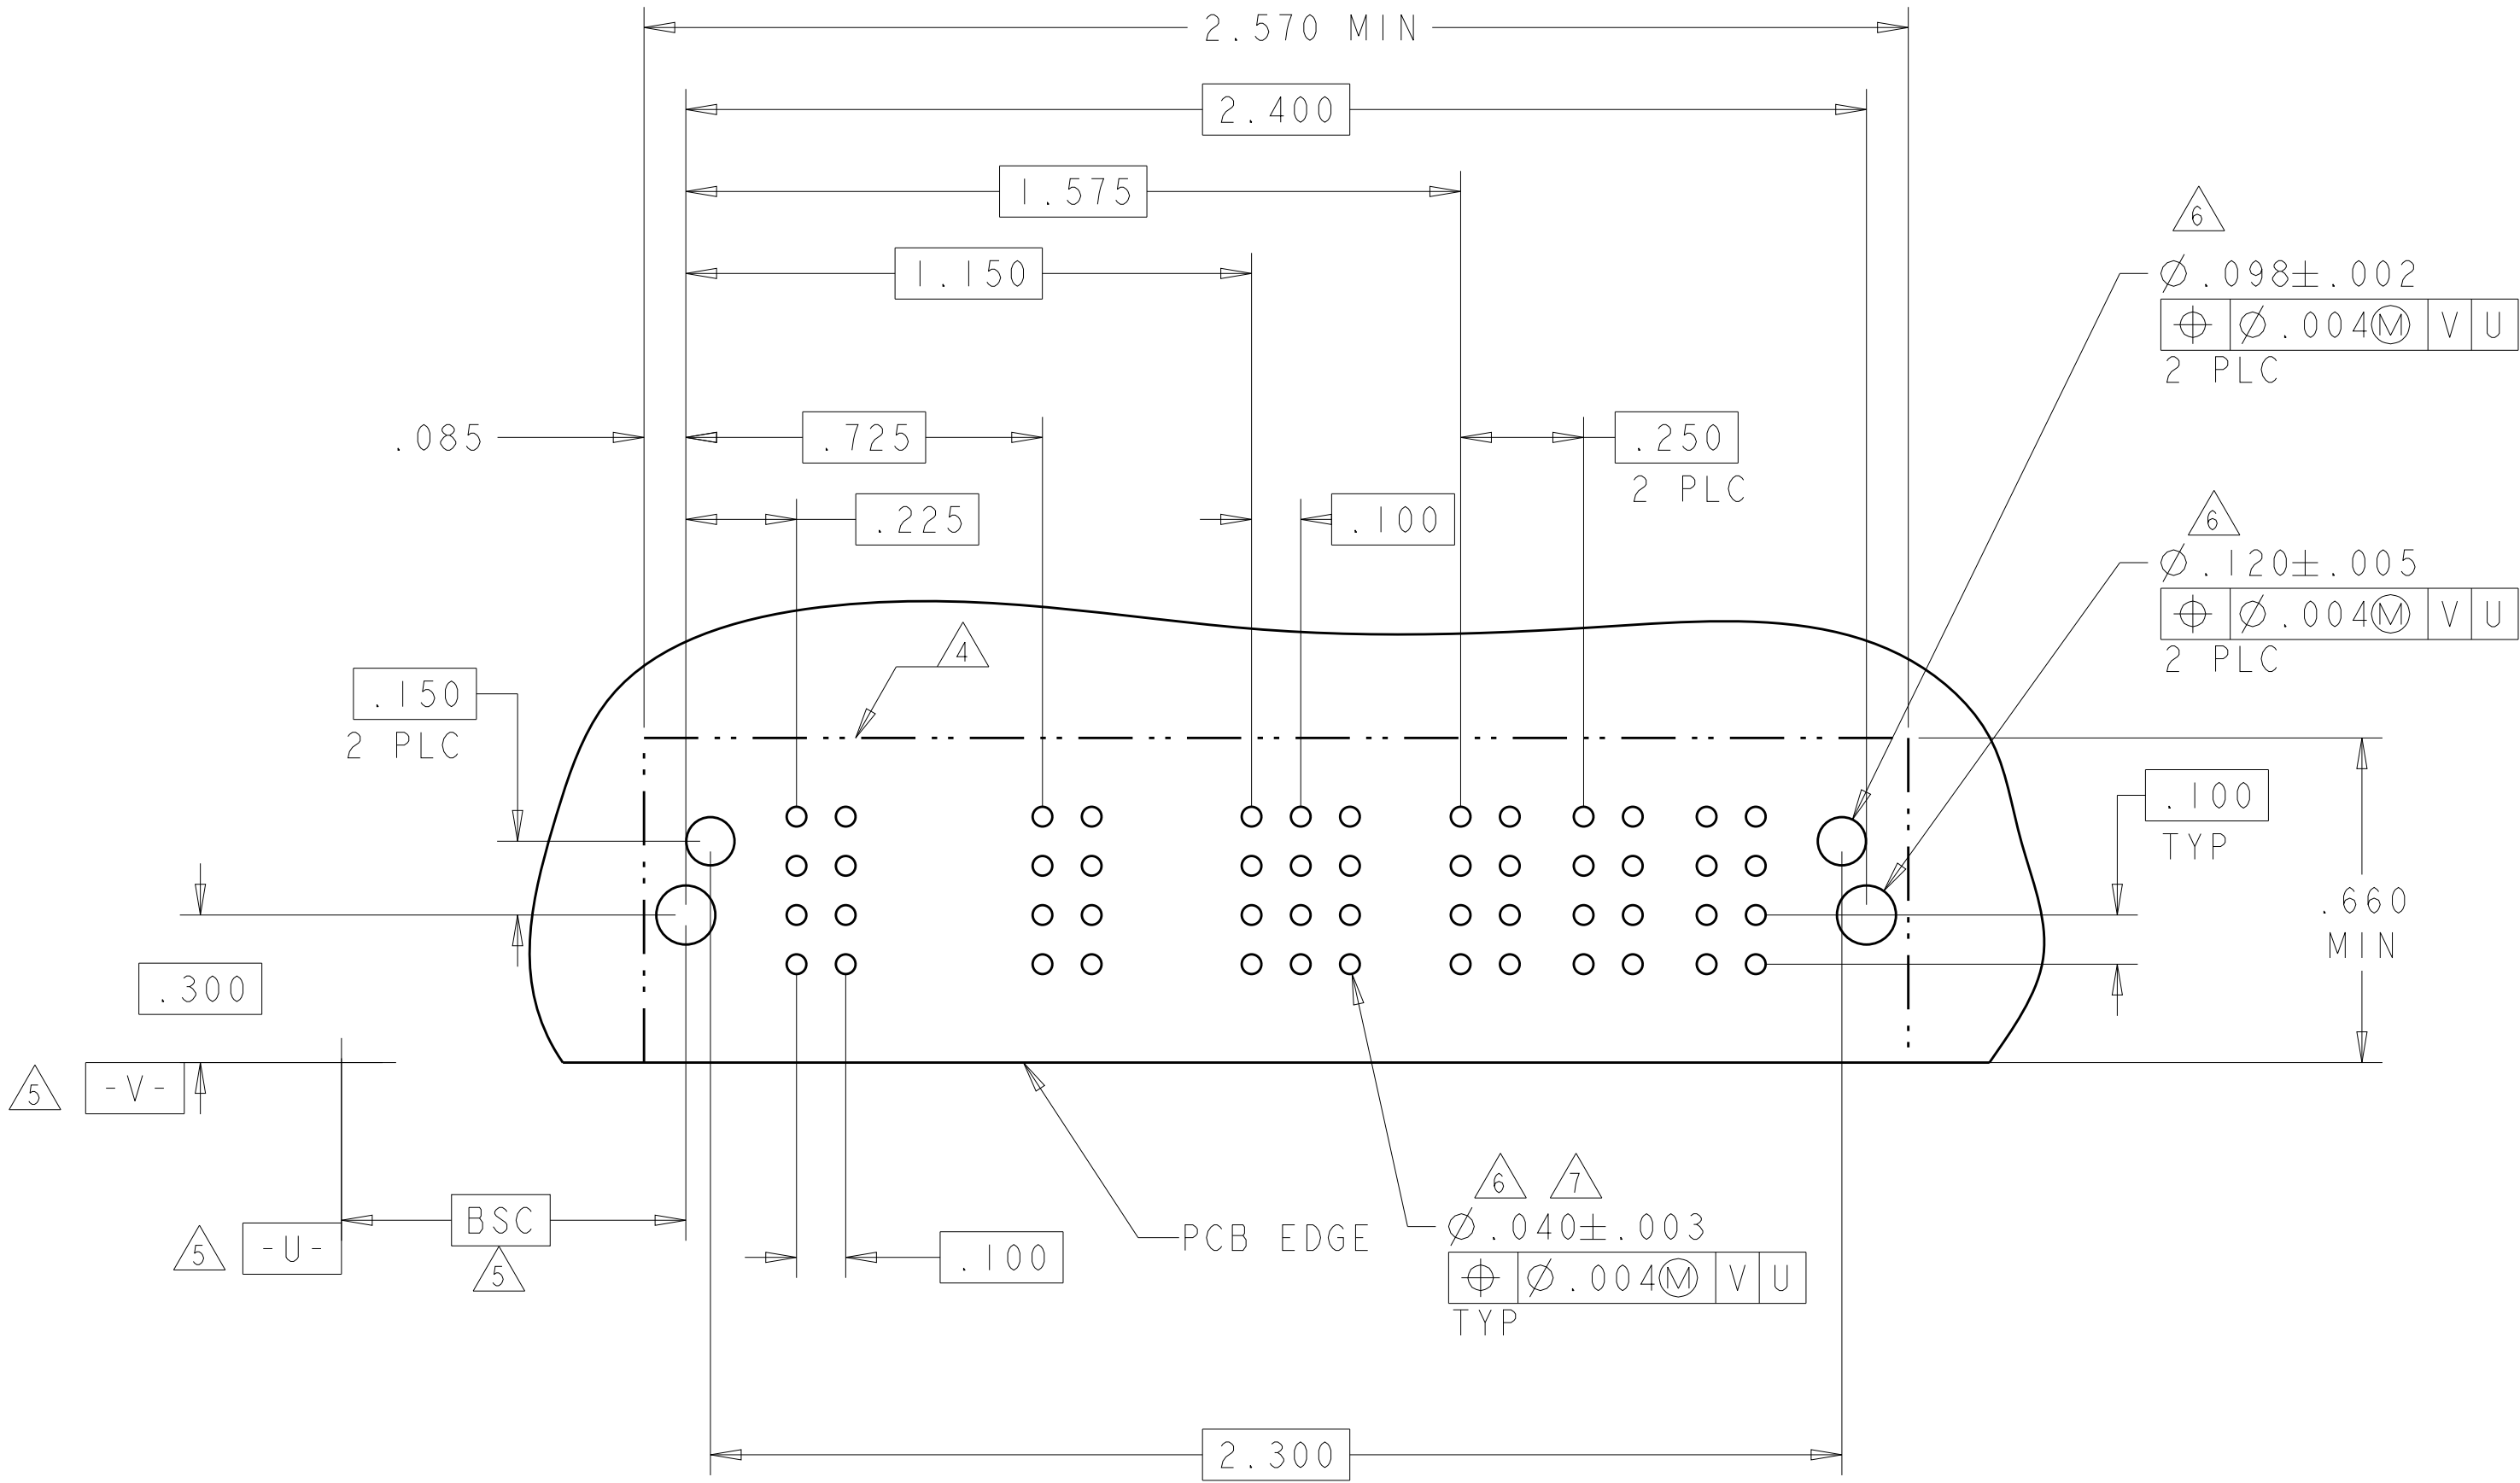


PART NUMBER	ROWS		POWER				SIGNAL					POWER					
			P1	P2	P3	P4	1	2	3	4	5	P5	P6	P7	P8		
5-6450830-2	D		TM	TM	TM	TM	J	J	J	J	J	TM	TM	TM	TM		
	K						K	K	K	K							
	N						N	N	N	N							
	H						S	S	S	S							
4P + 20S + 4P		HD															HD

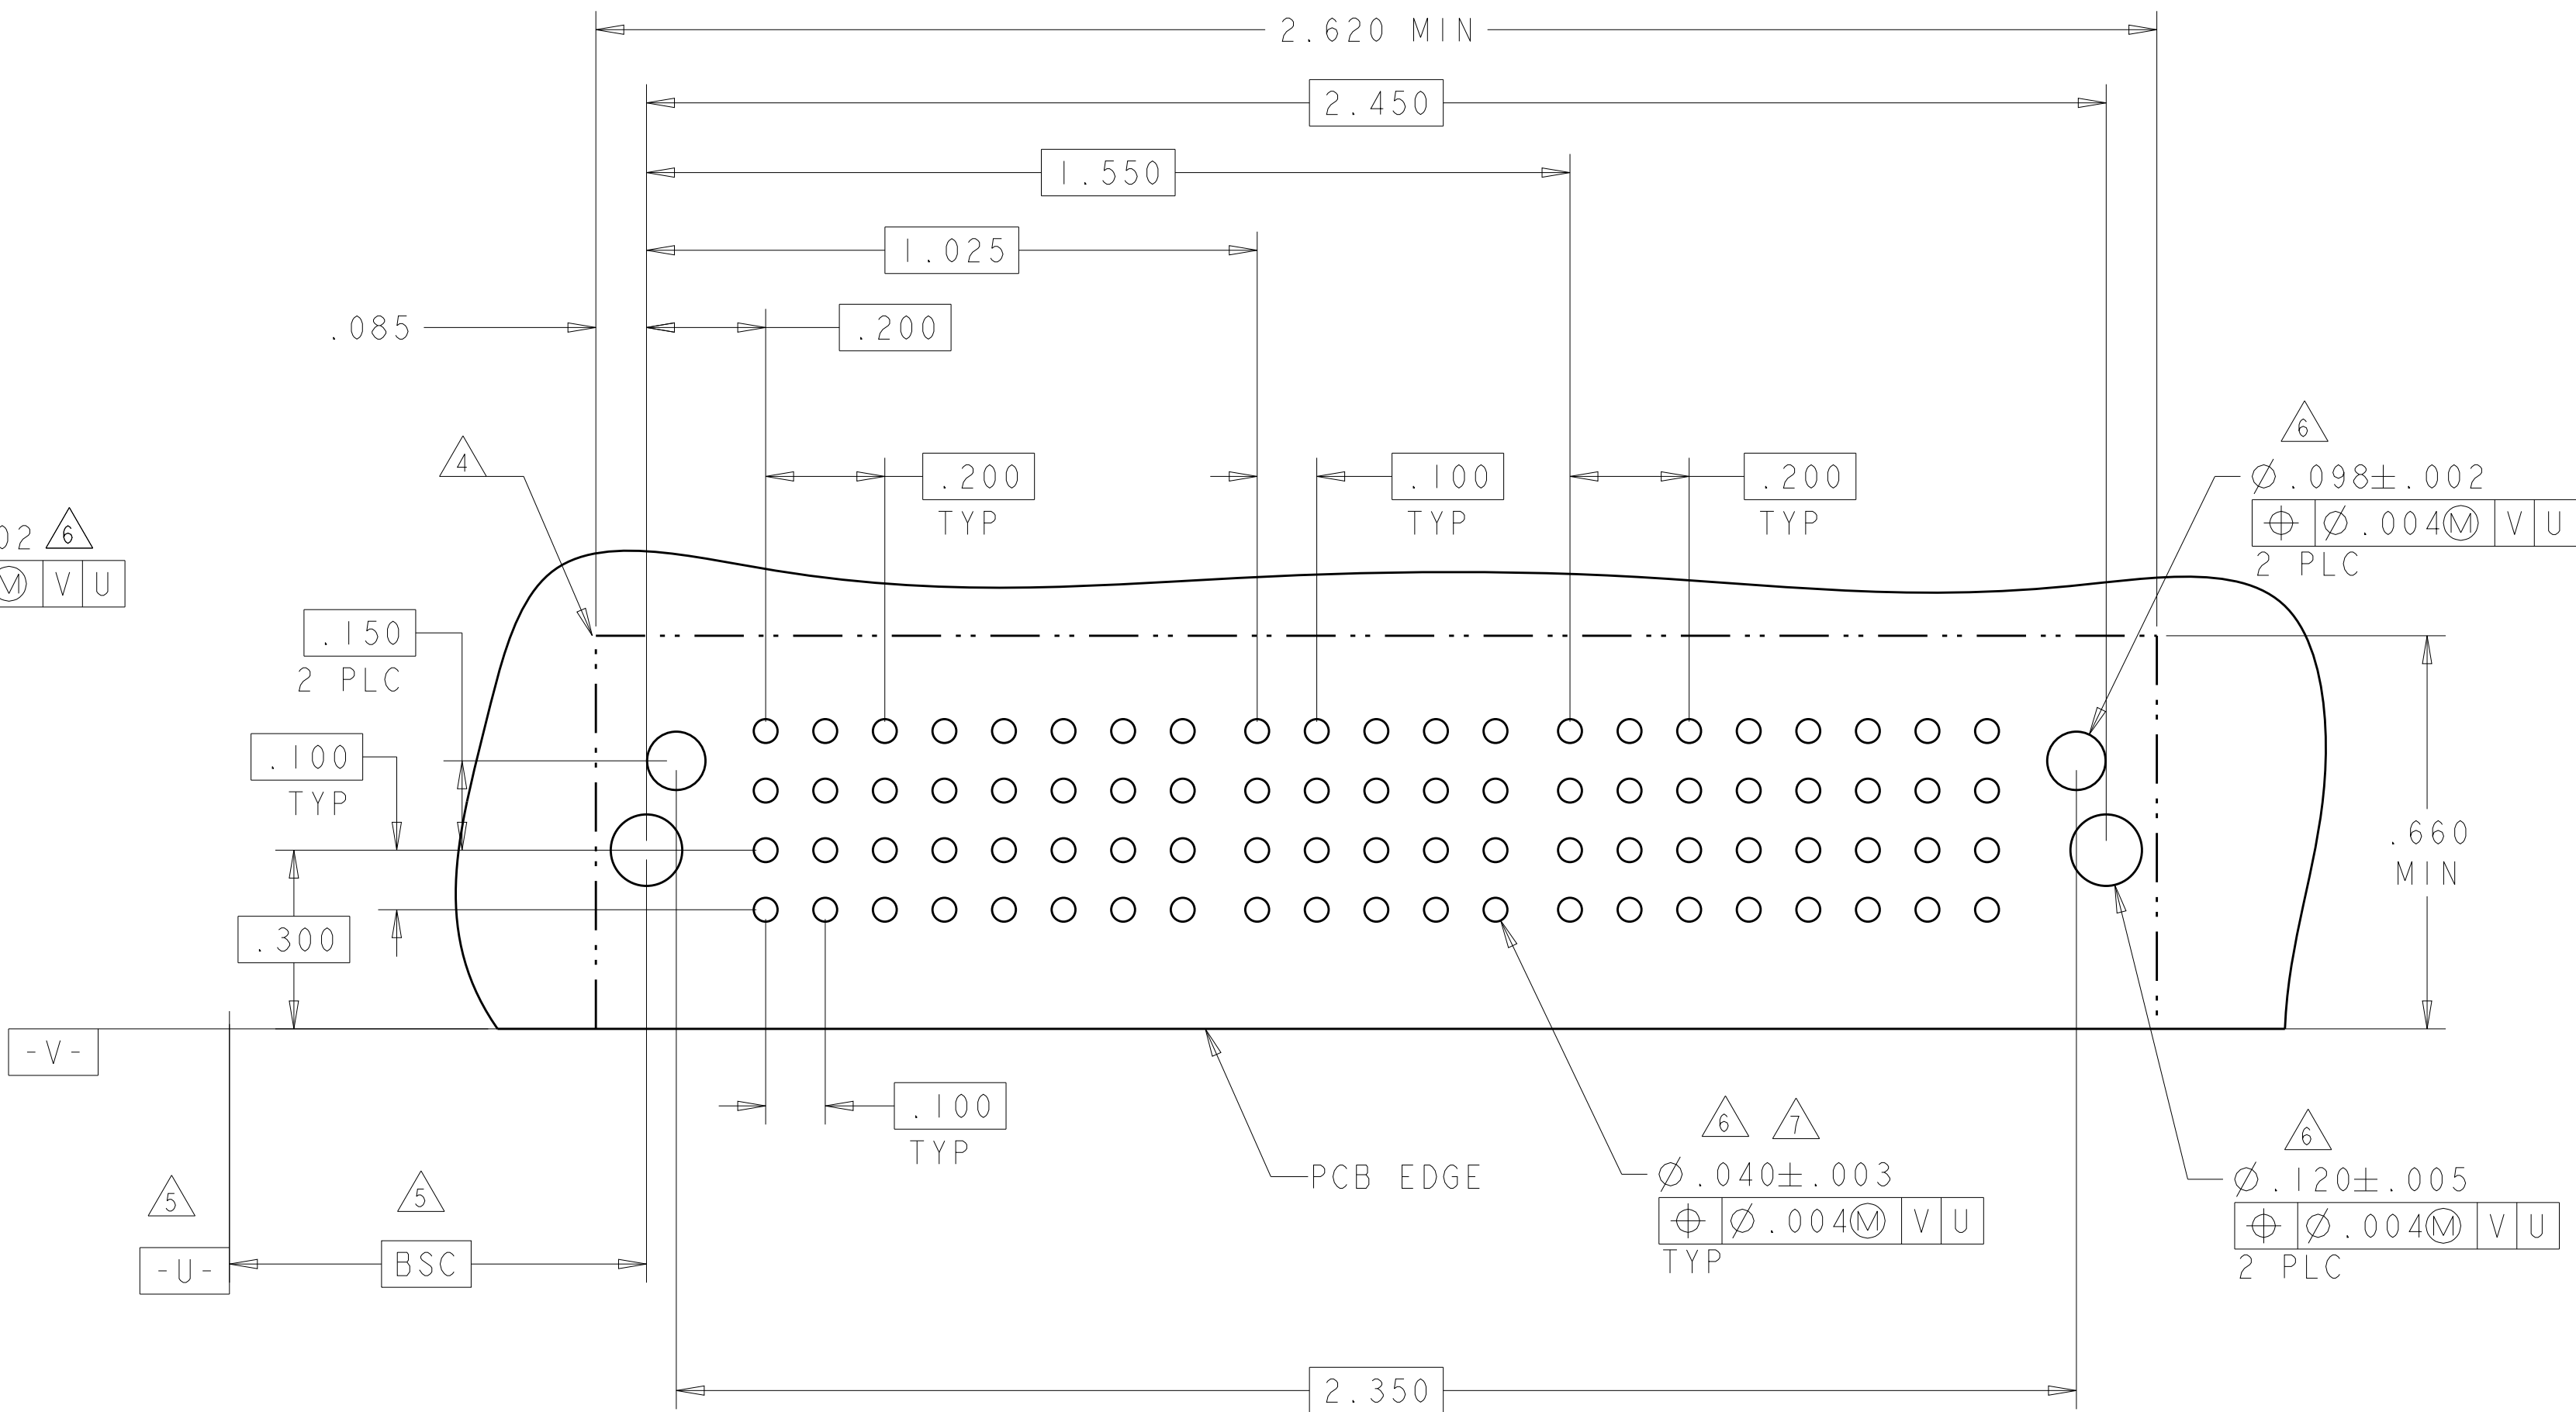4805 (3/11)

PART NUMBER	ROWS		POWER		SIGNAL		POWER		
		P1	P2	I	2	P4	P5		
5-6450830-4	D		TM	TM	J	J	TM	TM	
	C				K	K			
	B				N	N			
	A	HD			S	S			HD
2P + 8S + 2P									

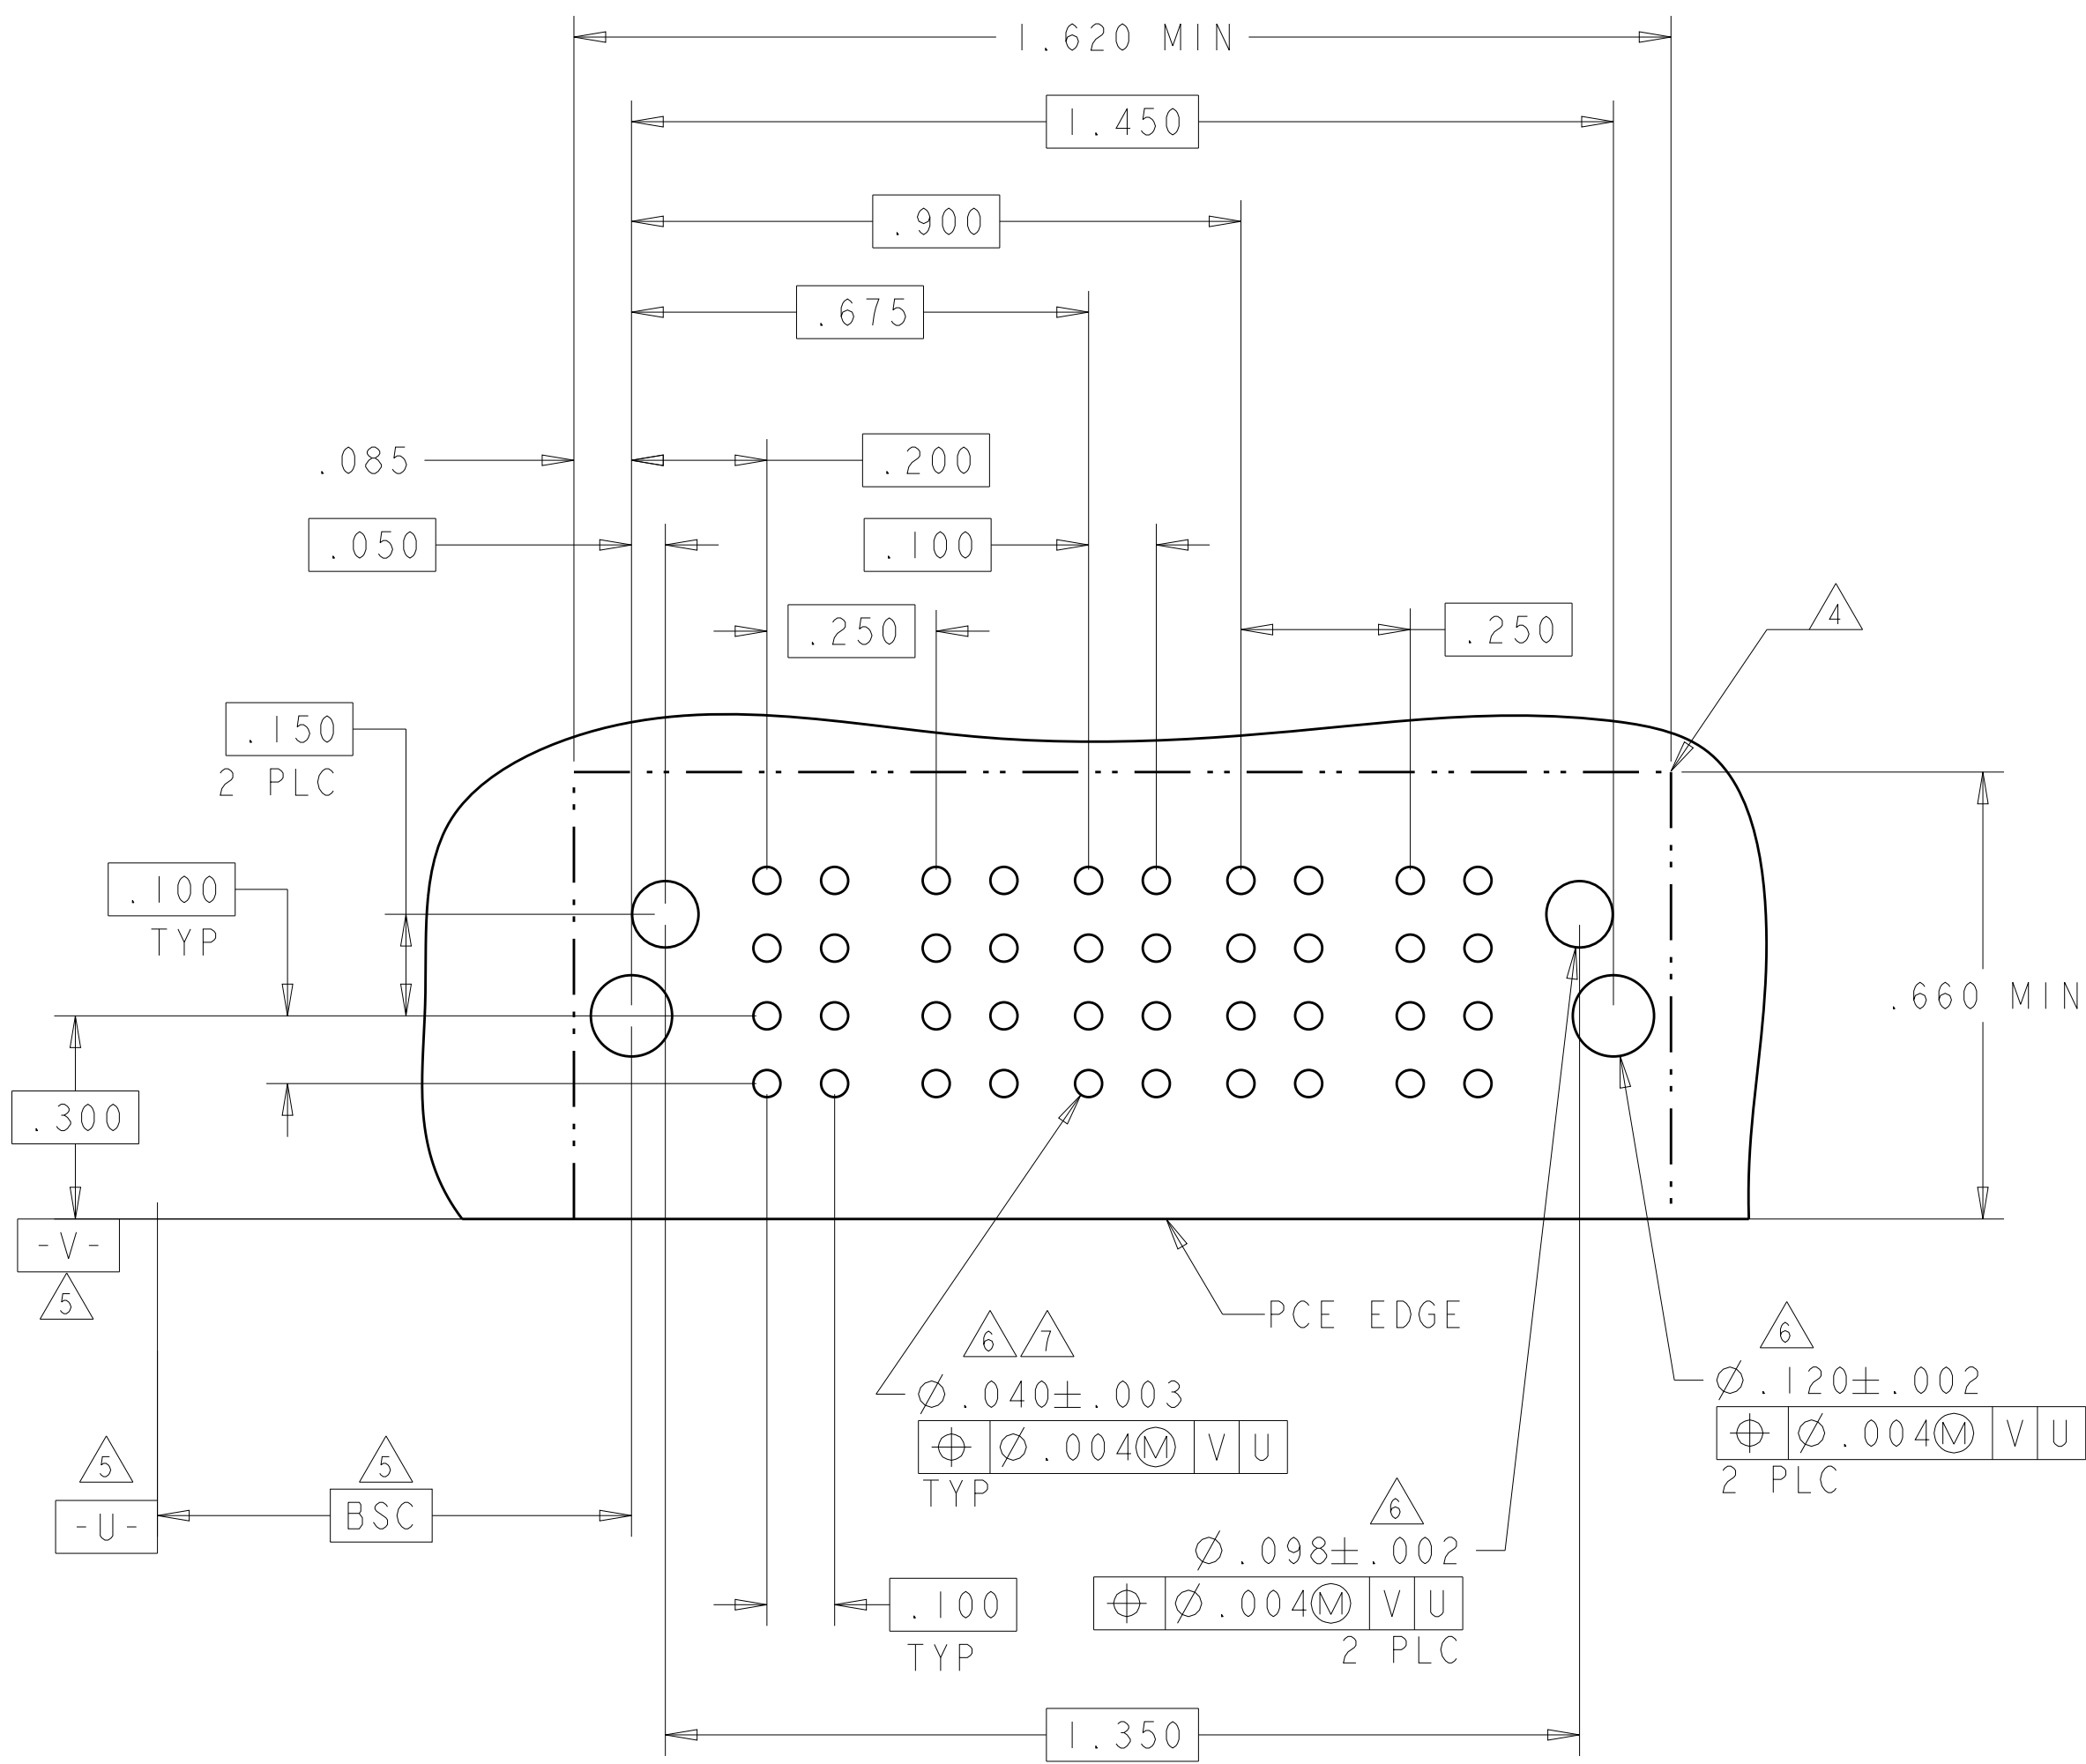
4805 (3/11)

PART NUMBER	ROWS		POWER			SIGNAL				POWER					
			P1	P2	P3	1	2	3	4	P4	P5	P6	P7	P8	
5-6450830-6	D		TM	TM	TM	J	J	J	J	TM	TM	TM	TM	TM	
	K					K	K	K							
	N					N	N	N							
	S					S	S	S							
A	HD														HD
3ACP + 16S + 5P															

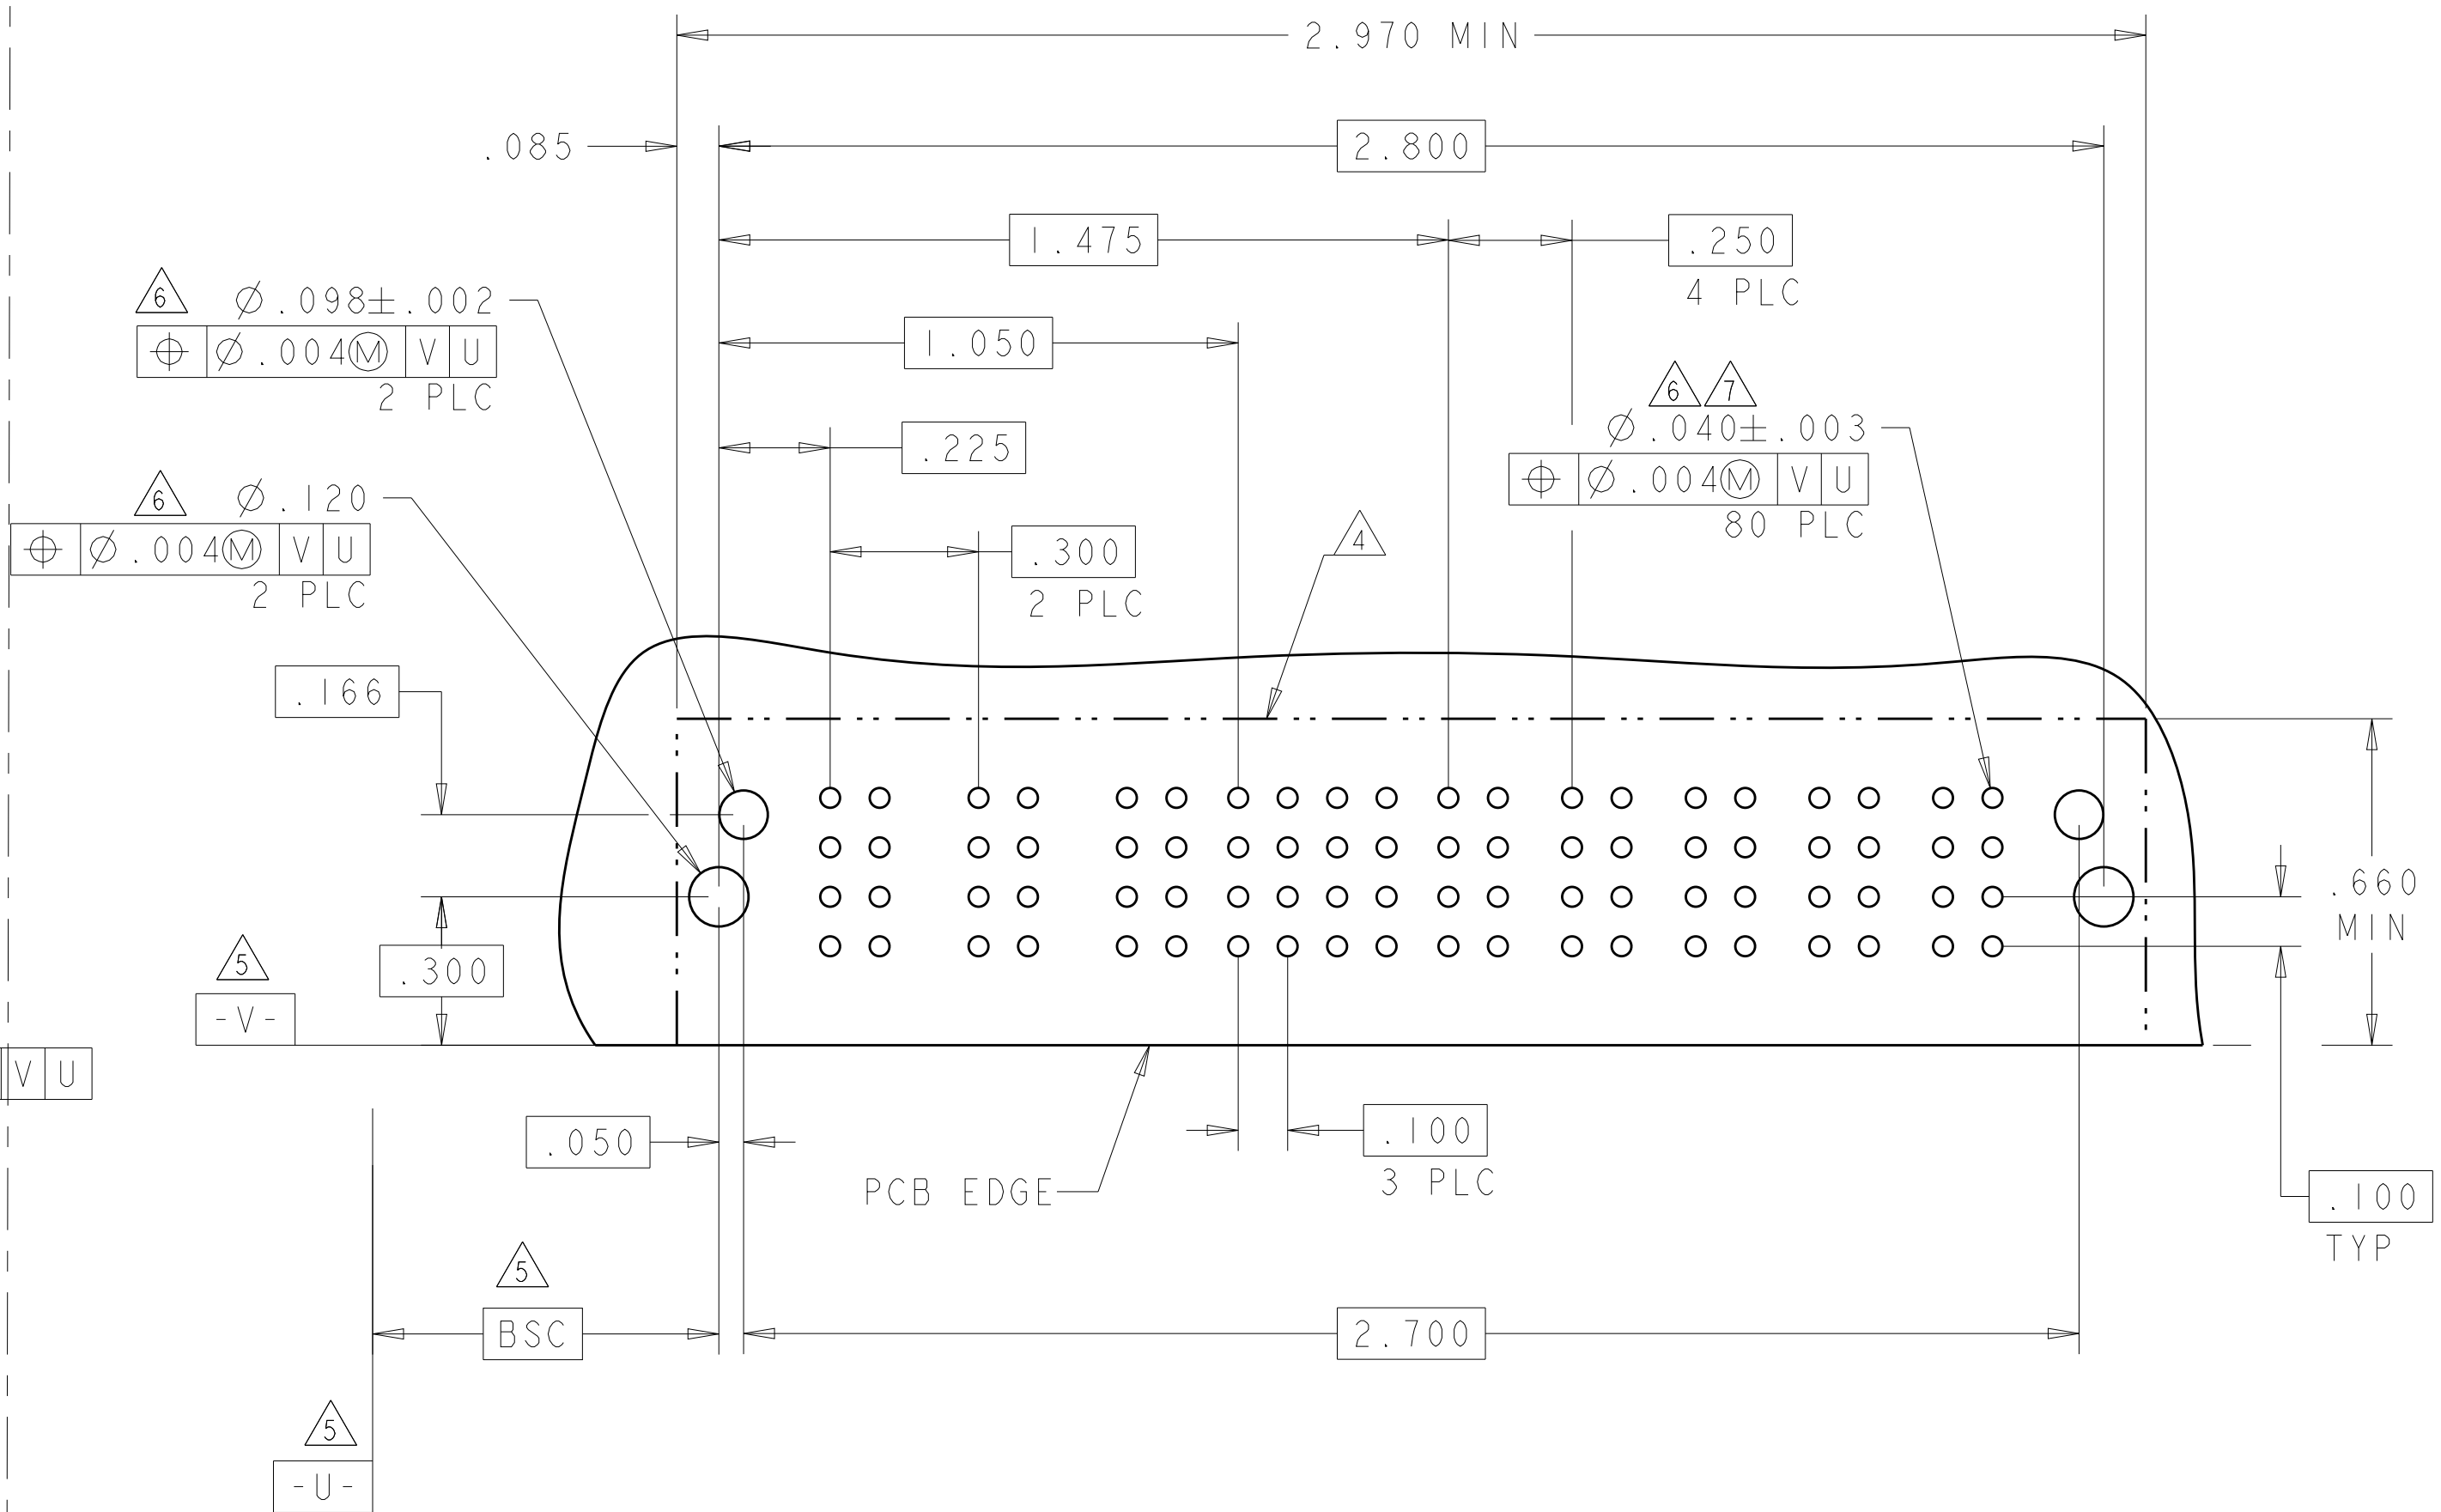4805 (3/11)

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
ES	00	-	-	SEE SHEET 1	-	-

PART NUMBER	ROWS		POWER				SIGNAL						POWER				
			P1	P2	P3	P4	1	2	3	4	5	6	P5	P6	P7	P8	
5-6450830-7	D		TM	TM	TM	TM	J	J	J	J	J	J	TM	TM	TM	TM	
	C						K	K	K	K	K	K					
	B						N	N	N	N	N	N					
	A	HD					S	S	S	S	S	H					HD
4P + 24S + 4P																	

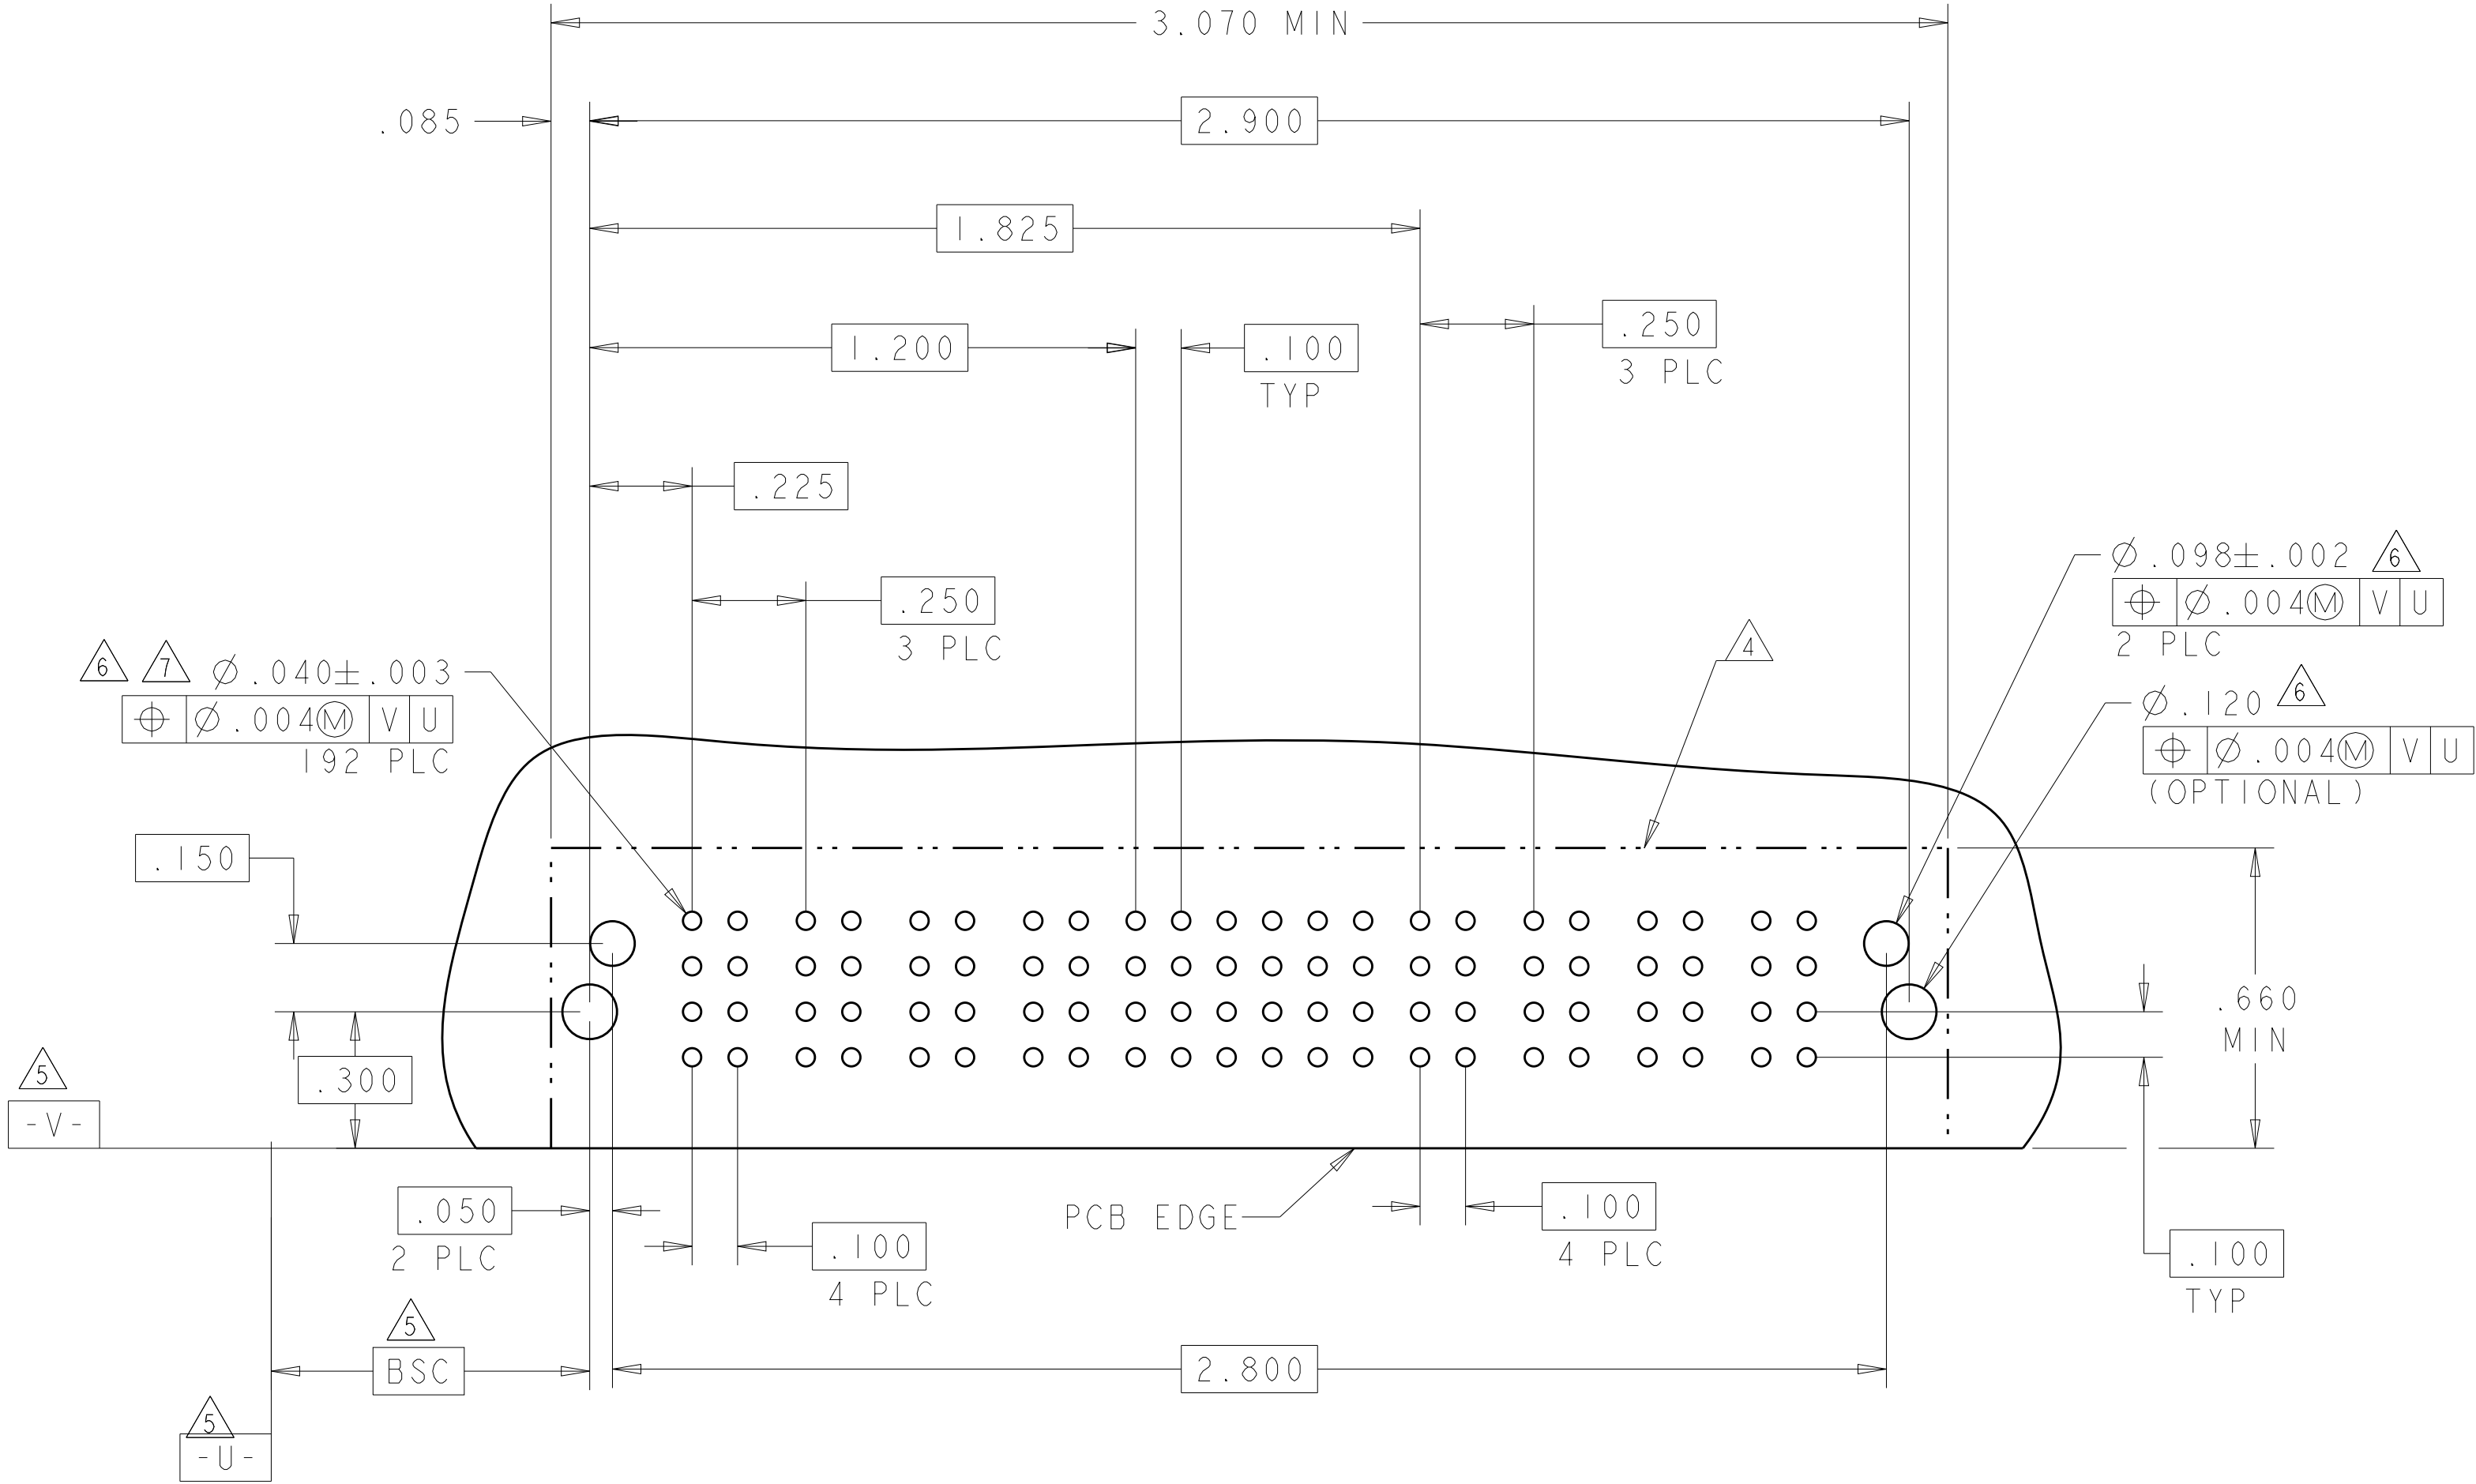


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. ZHAO	10APR2007	TE Connectivity	
		CHK S. ZHAO	10APR2007		
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
		0 PLC $\pm .01$		PRODUCT SPEC	
		1 PLC $\pm .01$		108-2292	
		2 PLC $\pm .01$		APPLICATION SPEC	
		3 PLC $\pm .005$		114-13251	
		4 PLC $\pm .0020$		WEIGHT	
MATERIAL		FINISH		CUSTOMER DRAWING	
				SCALE 4:1 SHEET 29 OF 42 REV S2	




LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
ES	00	-	-	SEE SHEET 1	-	-


N6

PART NUMBER	ROWS		POWER							SIGNAL							
			P1	P2	P3	P4	P5	P6	P7	1	2	3	4	5	6		
5-6450830-8	D		TM	TM	TM	TM	TM	TM	TM	FJ	FJ	FJ	FJ	FJ	FJ	TM	
	C									K	K	K	K	K	K		
	B									N	N	N	N	N	N		
	A	HD								S	S	S	S	S	S		HD
7ACP + 24S + 1P																	

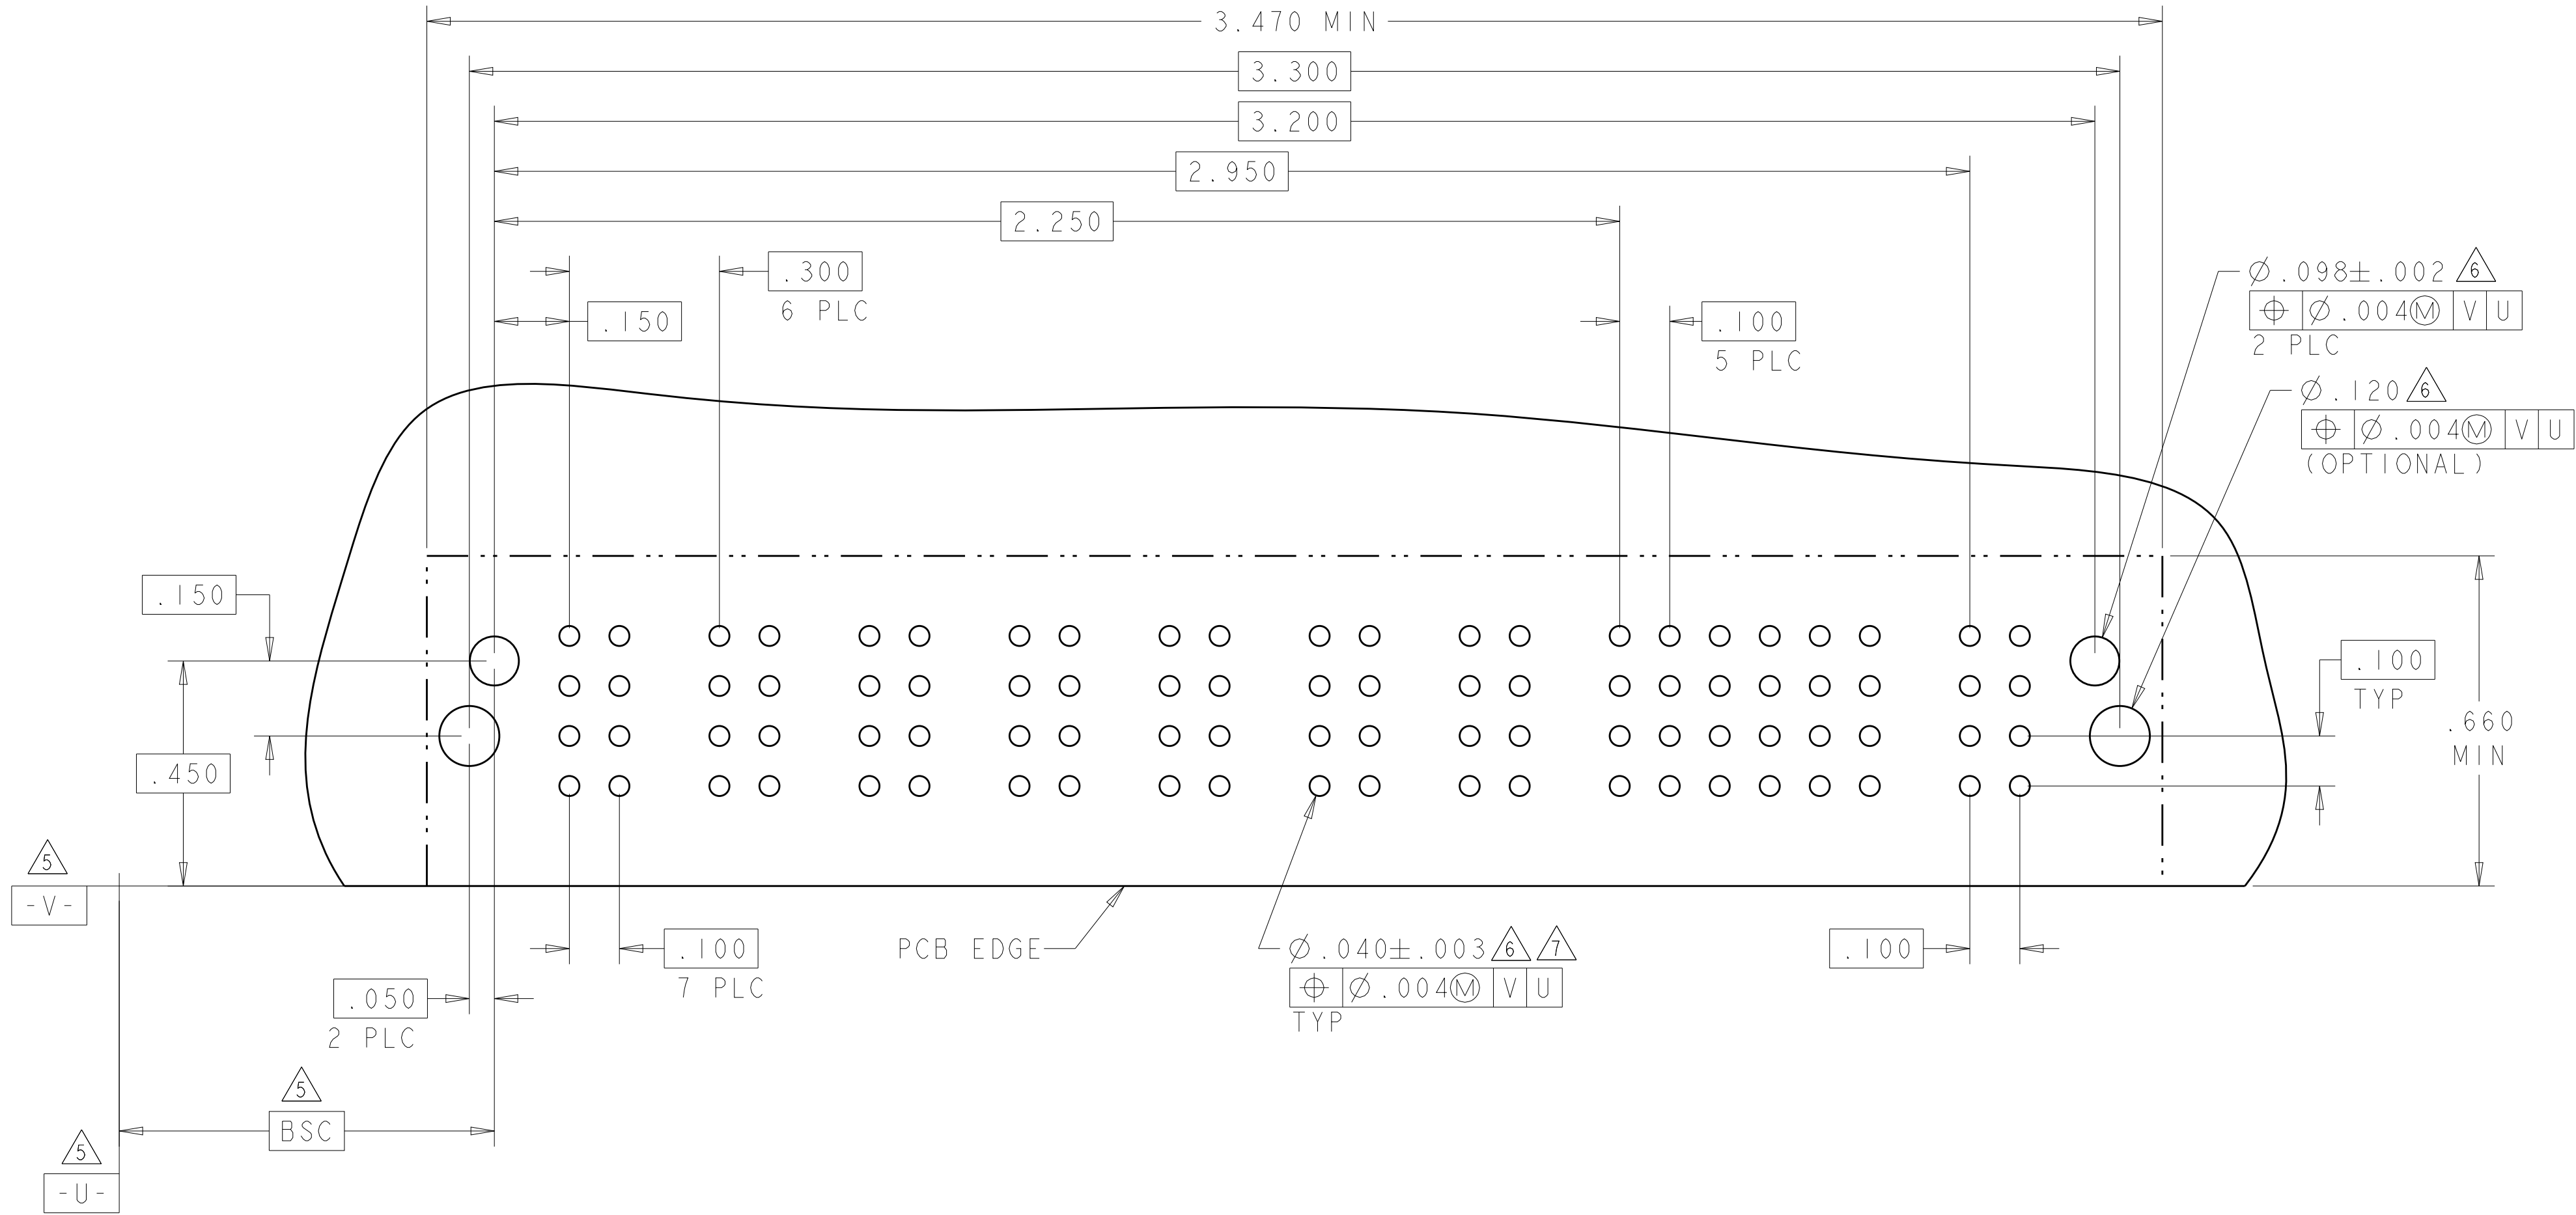

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. ZHAO	10APR2007	 TE Connectivity	
		CHK S. ZHAO	10APR2007		
DIMENSIONS: INCHES		APVD S. ZHAO	-	NAME RIGHT ANGLE WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM XLE	RESTRICTED TO -
		PRODUCT SPEC 108-2292			
		APPLICATION SPEC 114-13251			
TOLERANCES UNLESS OTHERWISE SPECIFIED:				SIZE A	CAGE CODE 00779
0 PLC ± 1 PLC ± 2 PLC ±.01 3 PLC ±.005 4 PLC ±.0020		ANGLES ±°		DRAWING NO C-6450830	
MATERIAL -	FINISH -	WEIGHT -			
		CUSTOMER DRAWING		SCALE 4:1	SHEET 30
				OF 42	REV S2

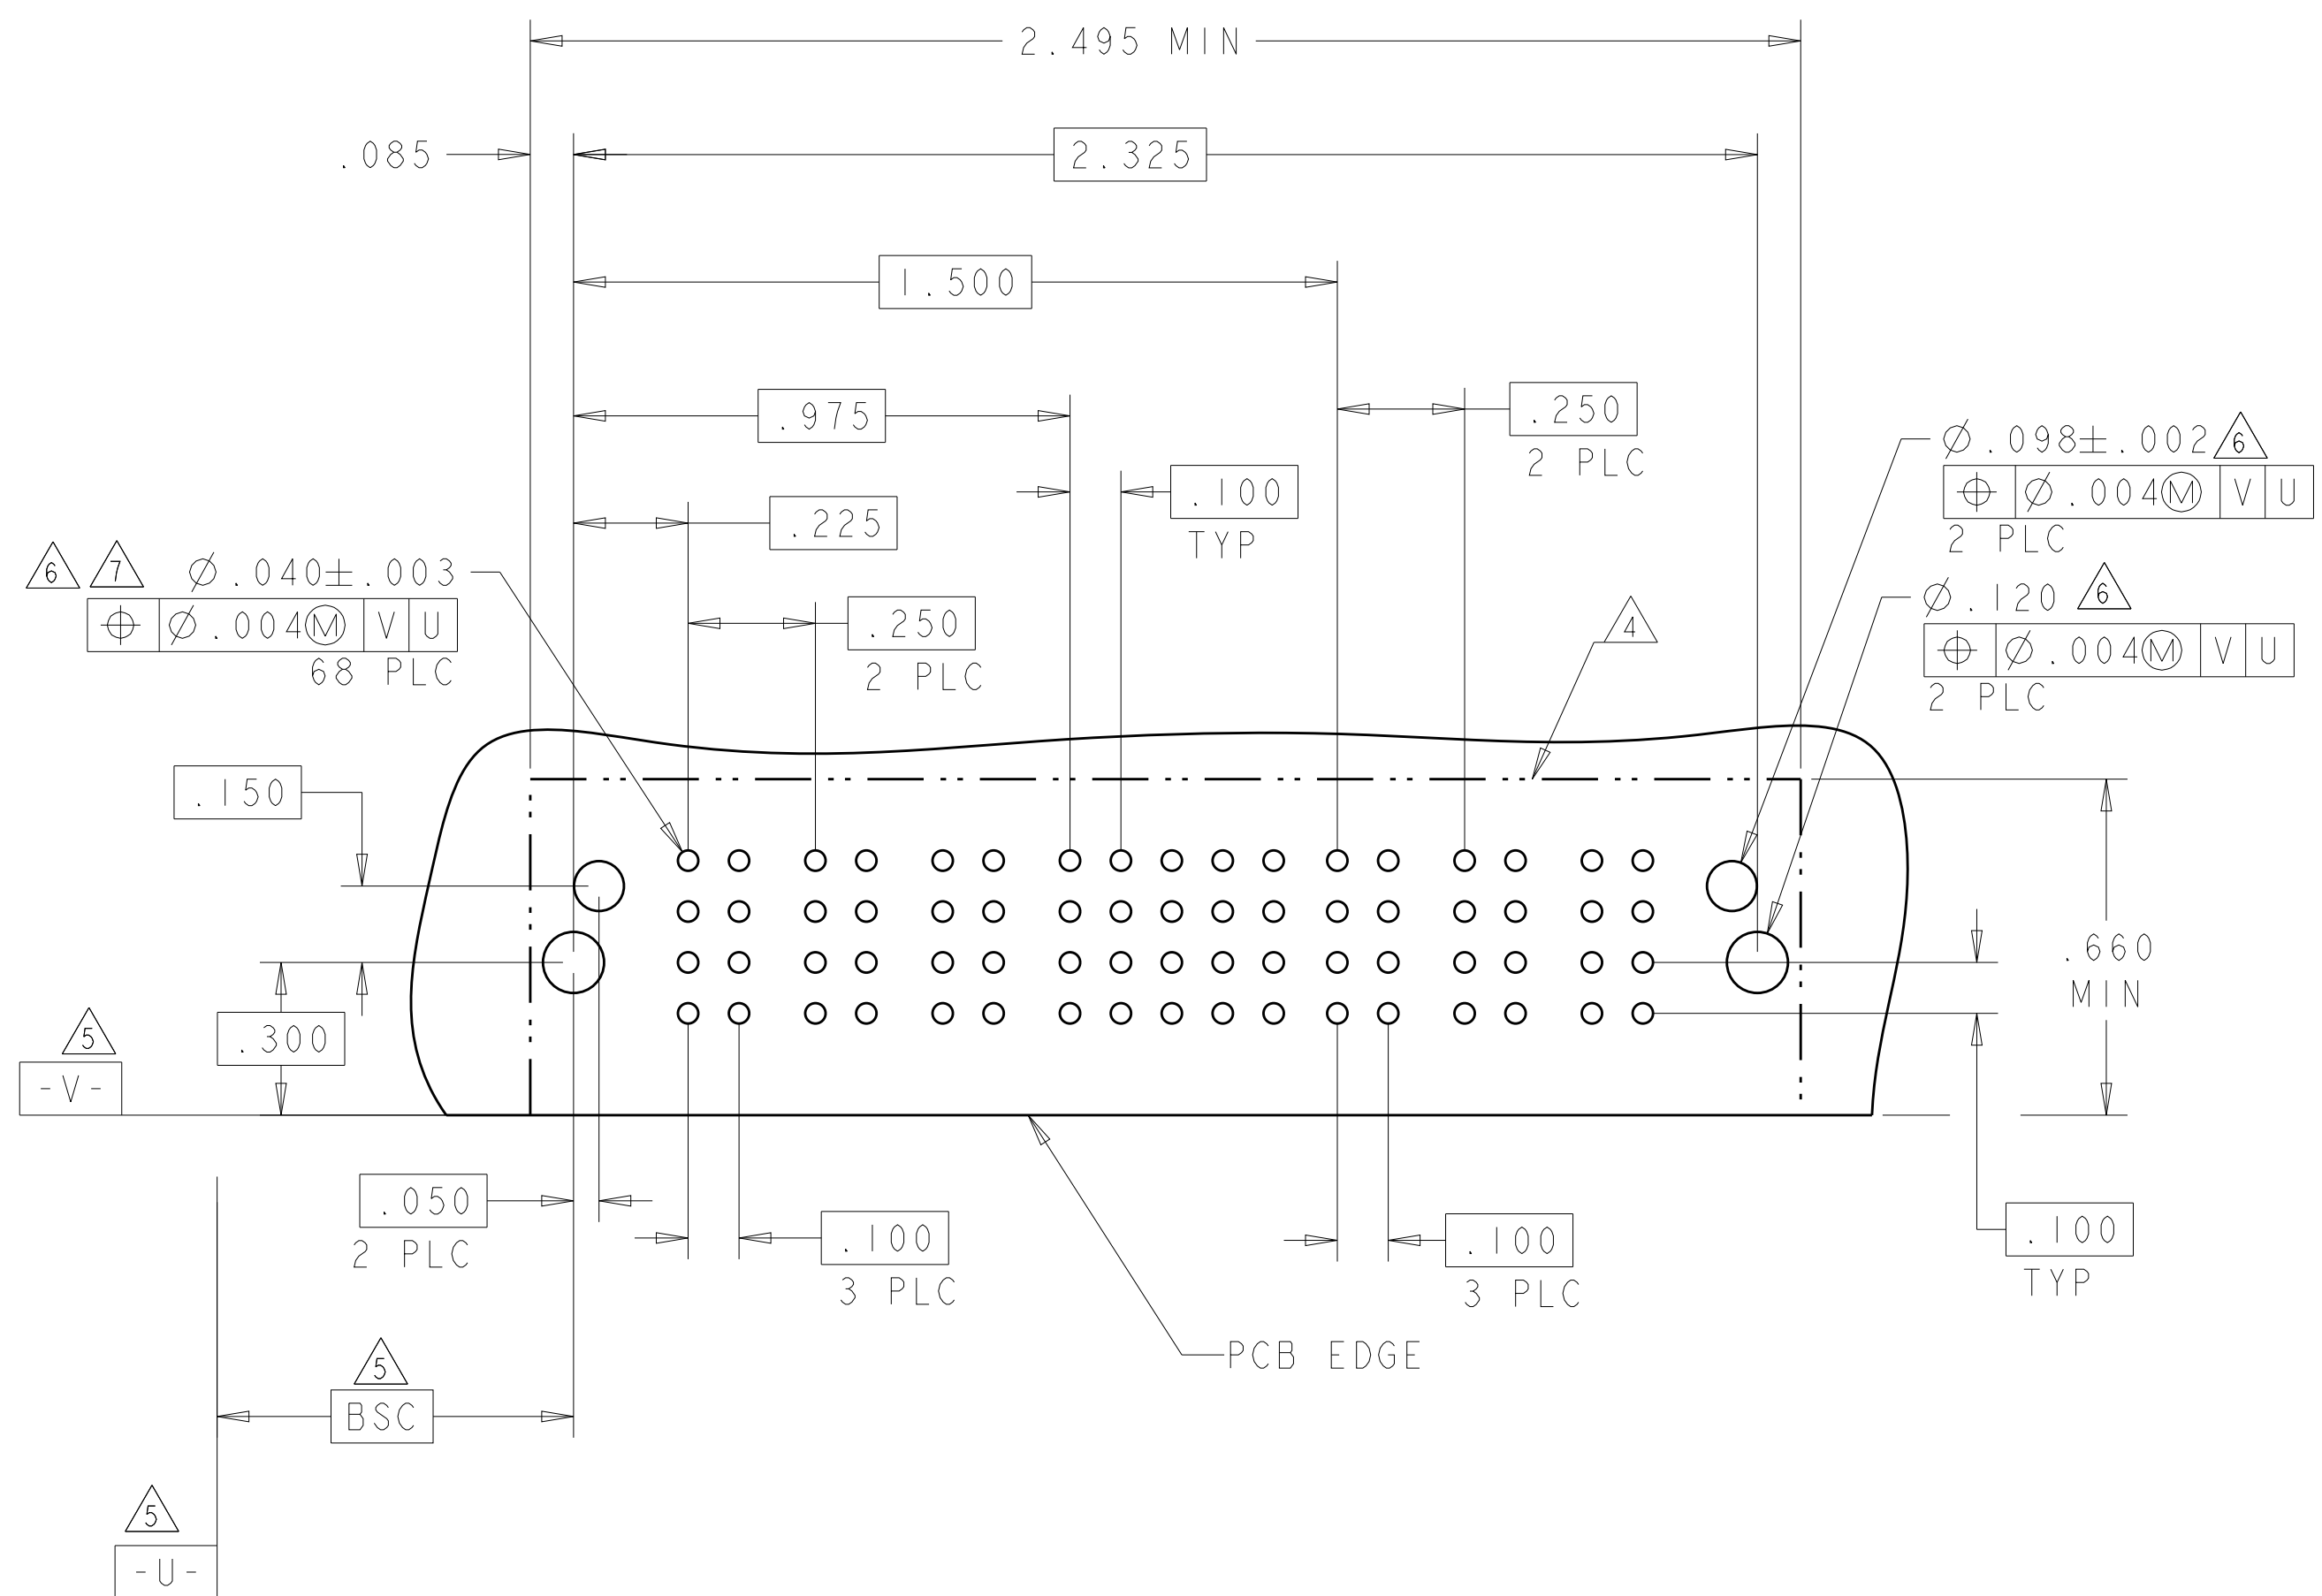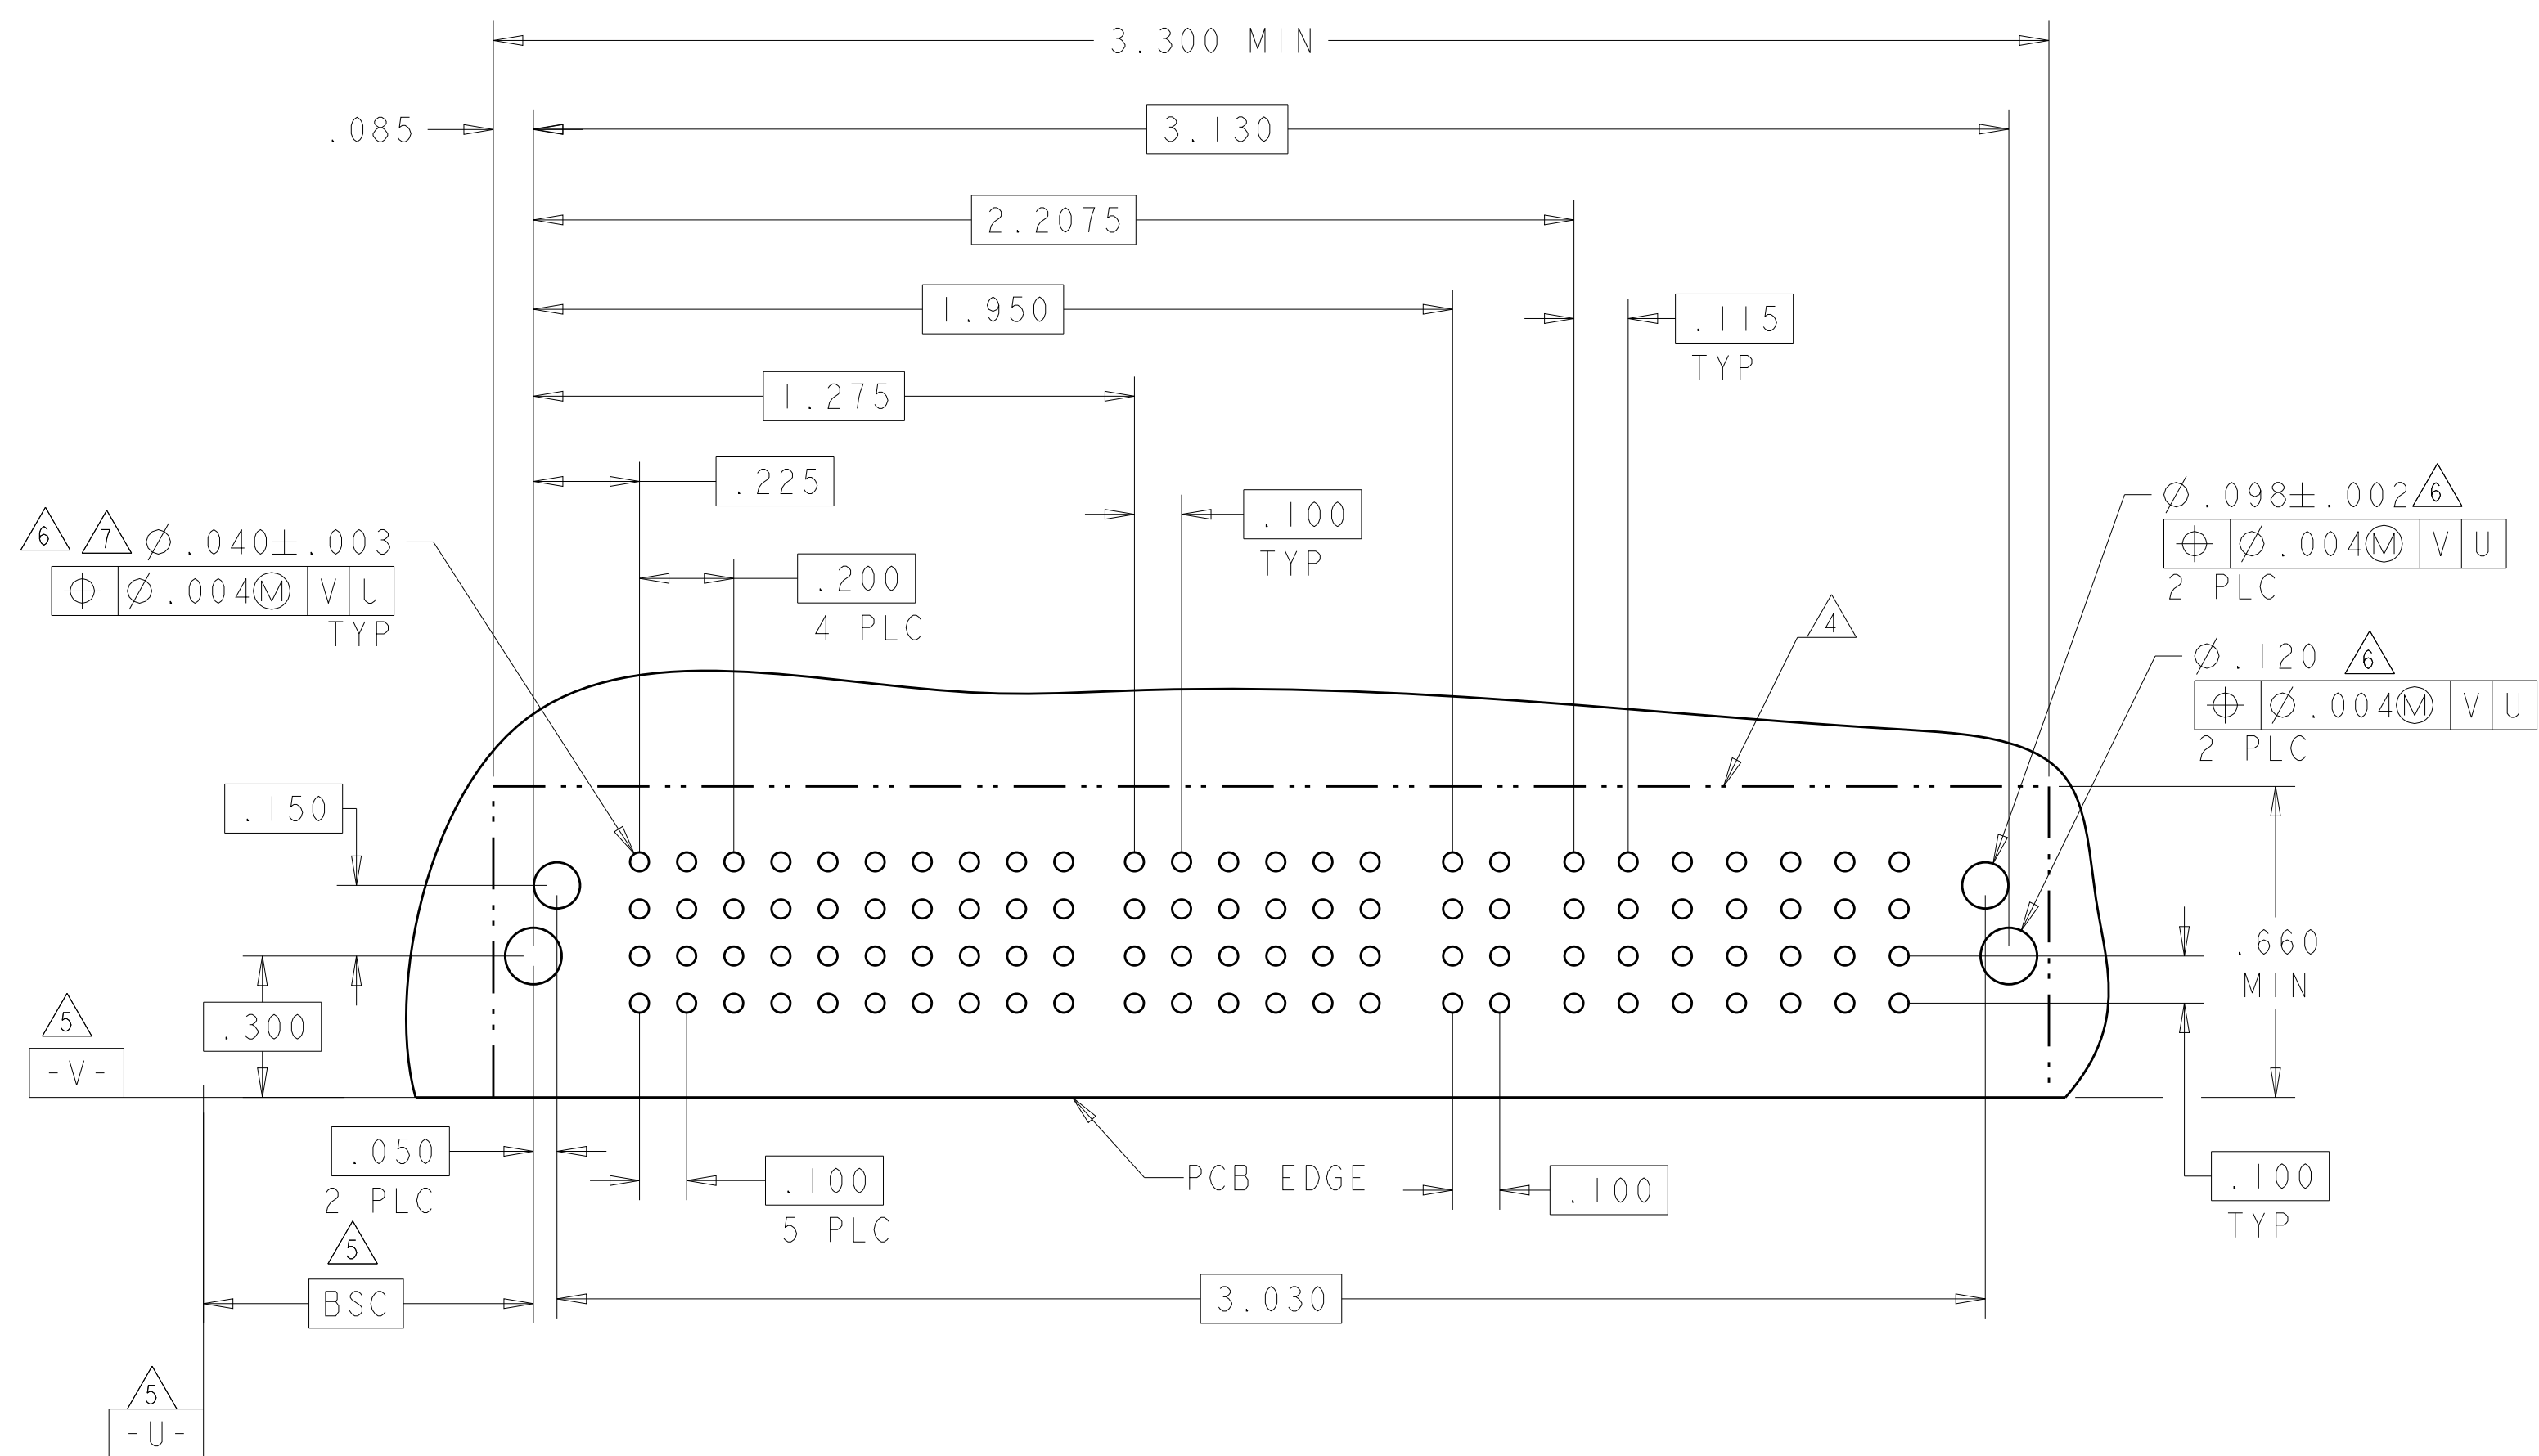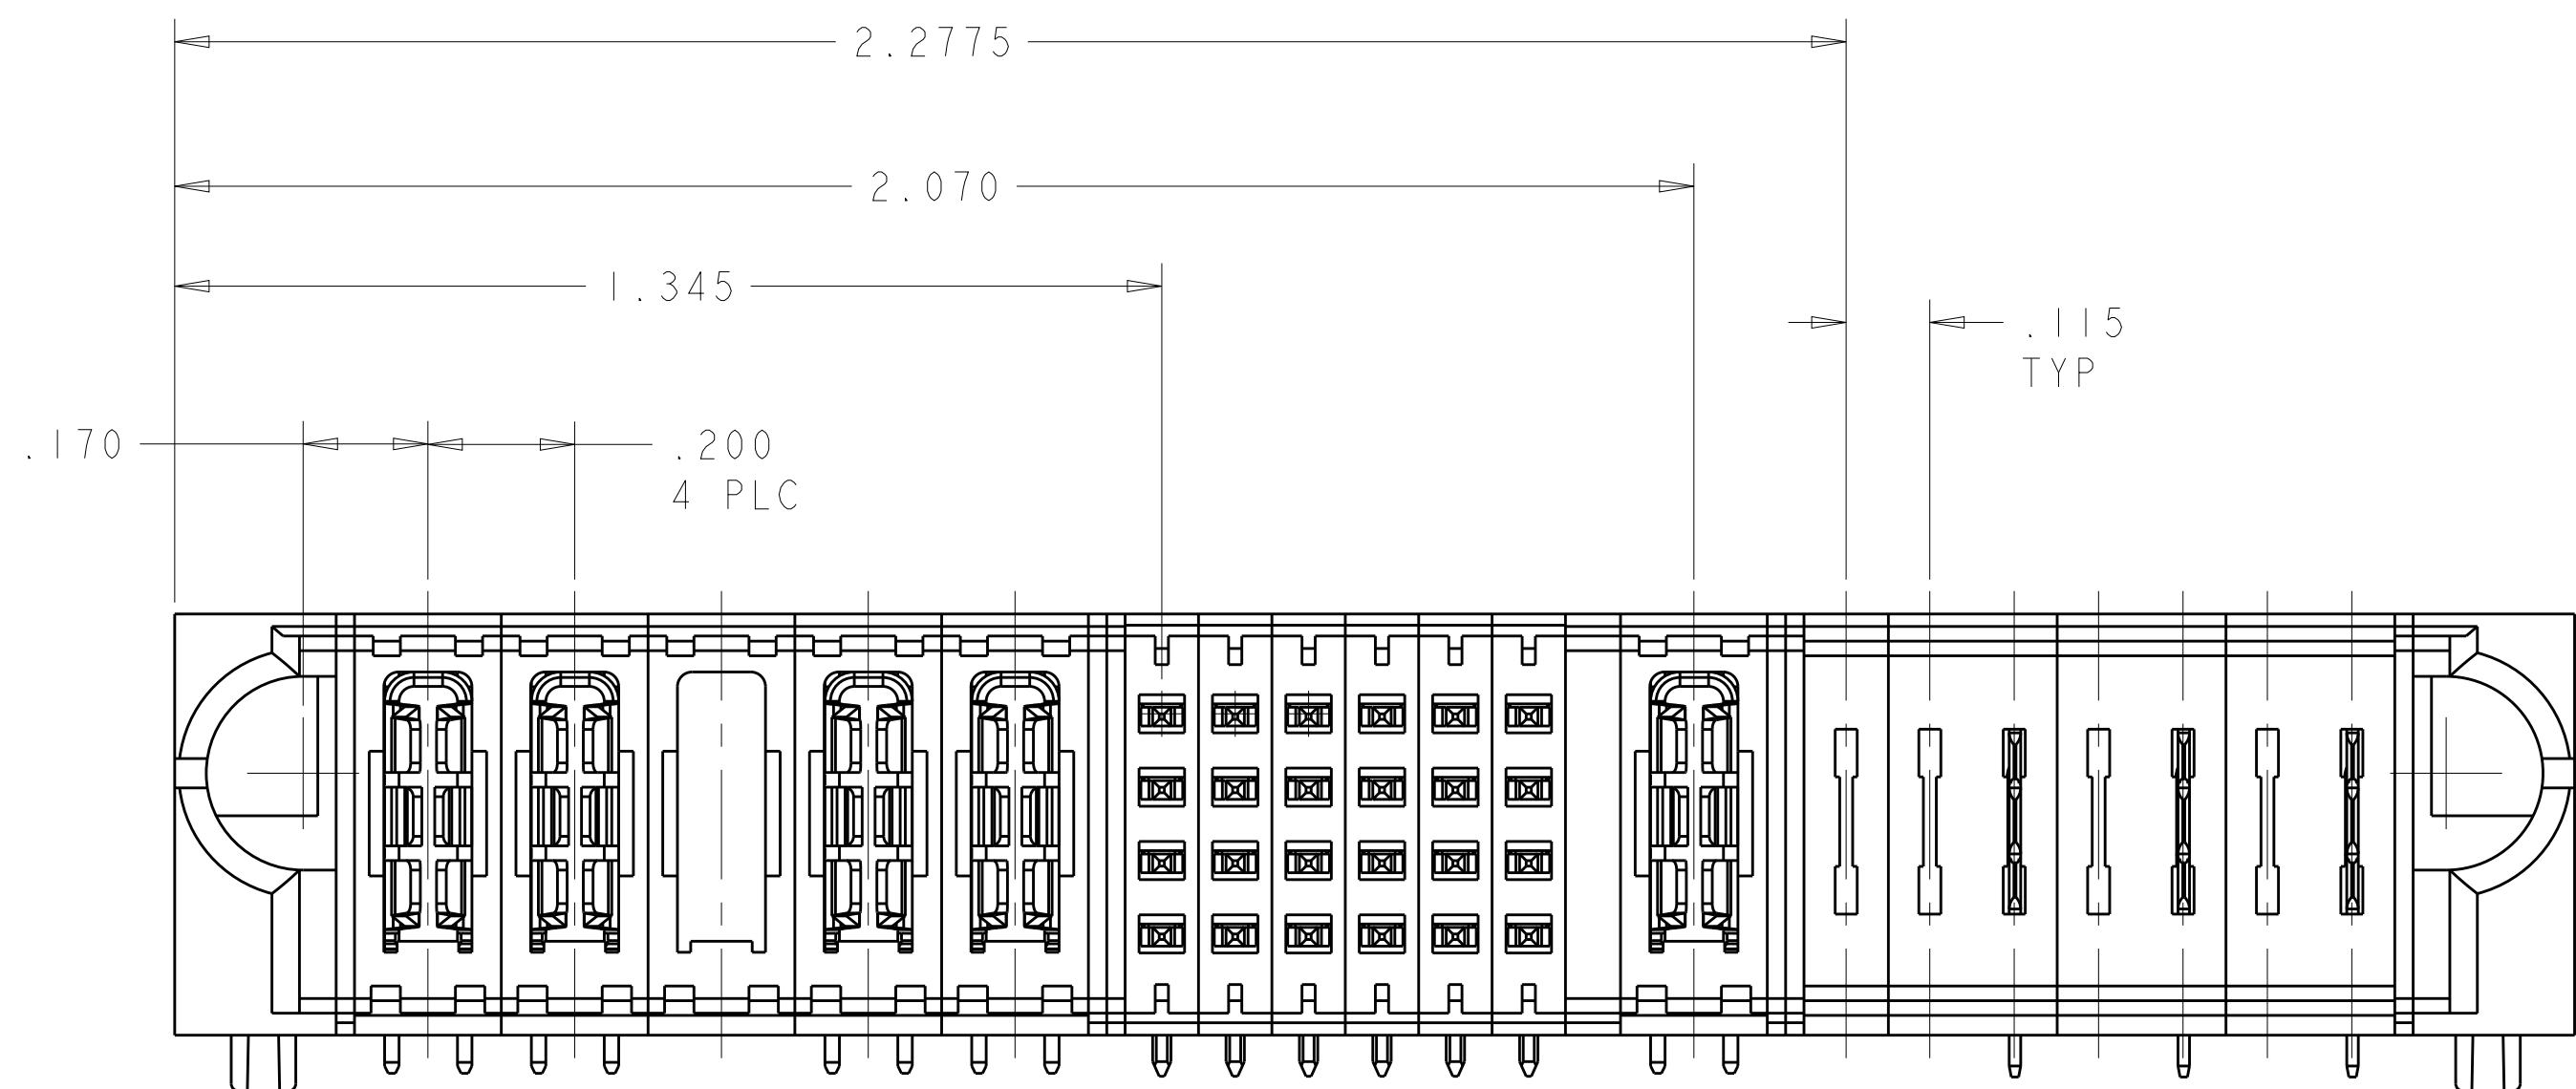[illegible]



THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. ZHAO 10APR2007 CHG S. ZHAO 10APR2007 APP'D S. ZHAO		 TE Connectivity	
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME RIGHT ANGLE WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM XLE	
		Ø PLC ±.01 PLC ±.01 PLC ±.005 PLC ±.0020 ANGLES ±0°		PRODUCT SPEC 108-2292 APPLICATION SPEC 114-13251	
MATERIAL -		FINISH -		SIZE CAGE CODE DRAWING NO A100779 C6450830	
		WEIGHT -		RESTRICTED TO -	
		CUSTOMER DRAWING		SCALE 4:1 SHEET 31 OF 42 REV S	

LOC		DIST		REVISONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
-	-	SEE SHEET 1		-	-	-	

PART NUMBER	ROWS		POWER						SIGNAL						POWER			
			P1	P2	P3	P4	P5	P6	1	2	3	4	5	6	P7	P8	P9	
6-6450830-3	D		TM	TM	TM	TM	TM	TM	J	J	J	J	J	J	TM	TM	TM	
	K								K	K	K	K	K					
	N								N	N	N	N	N					
	A	HD							S	S	S	S	S	S				
6P + 40S + 3ACP																		

PART NUMBER	ROWS		POWER					SIGNAL						POWER				
			P1	P2	P3	P4	P5	1	2	3	4	5	6	LP1	LP2	LP3	LP4	
6-6450830-6	D		TM	TM	TM	TM	TM	J	J	J	J	J	J	LMF	LM	LM		
	K							K	K	K	K	K						
	N							N	N	N	N	N						
	S							S	S	S	S	S						
5ACP + 24S + 4LP			HD															HD

NO CONTACTS LOADED

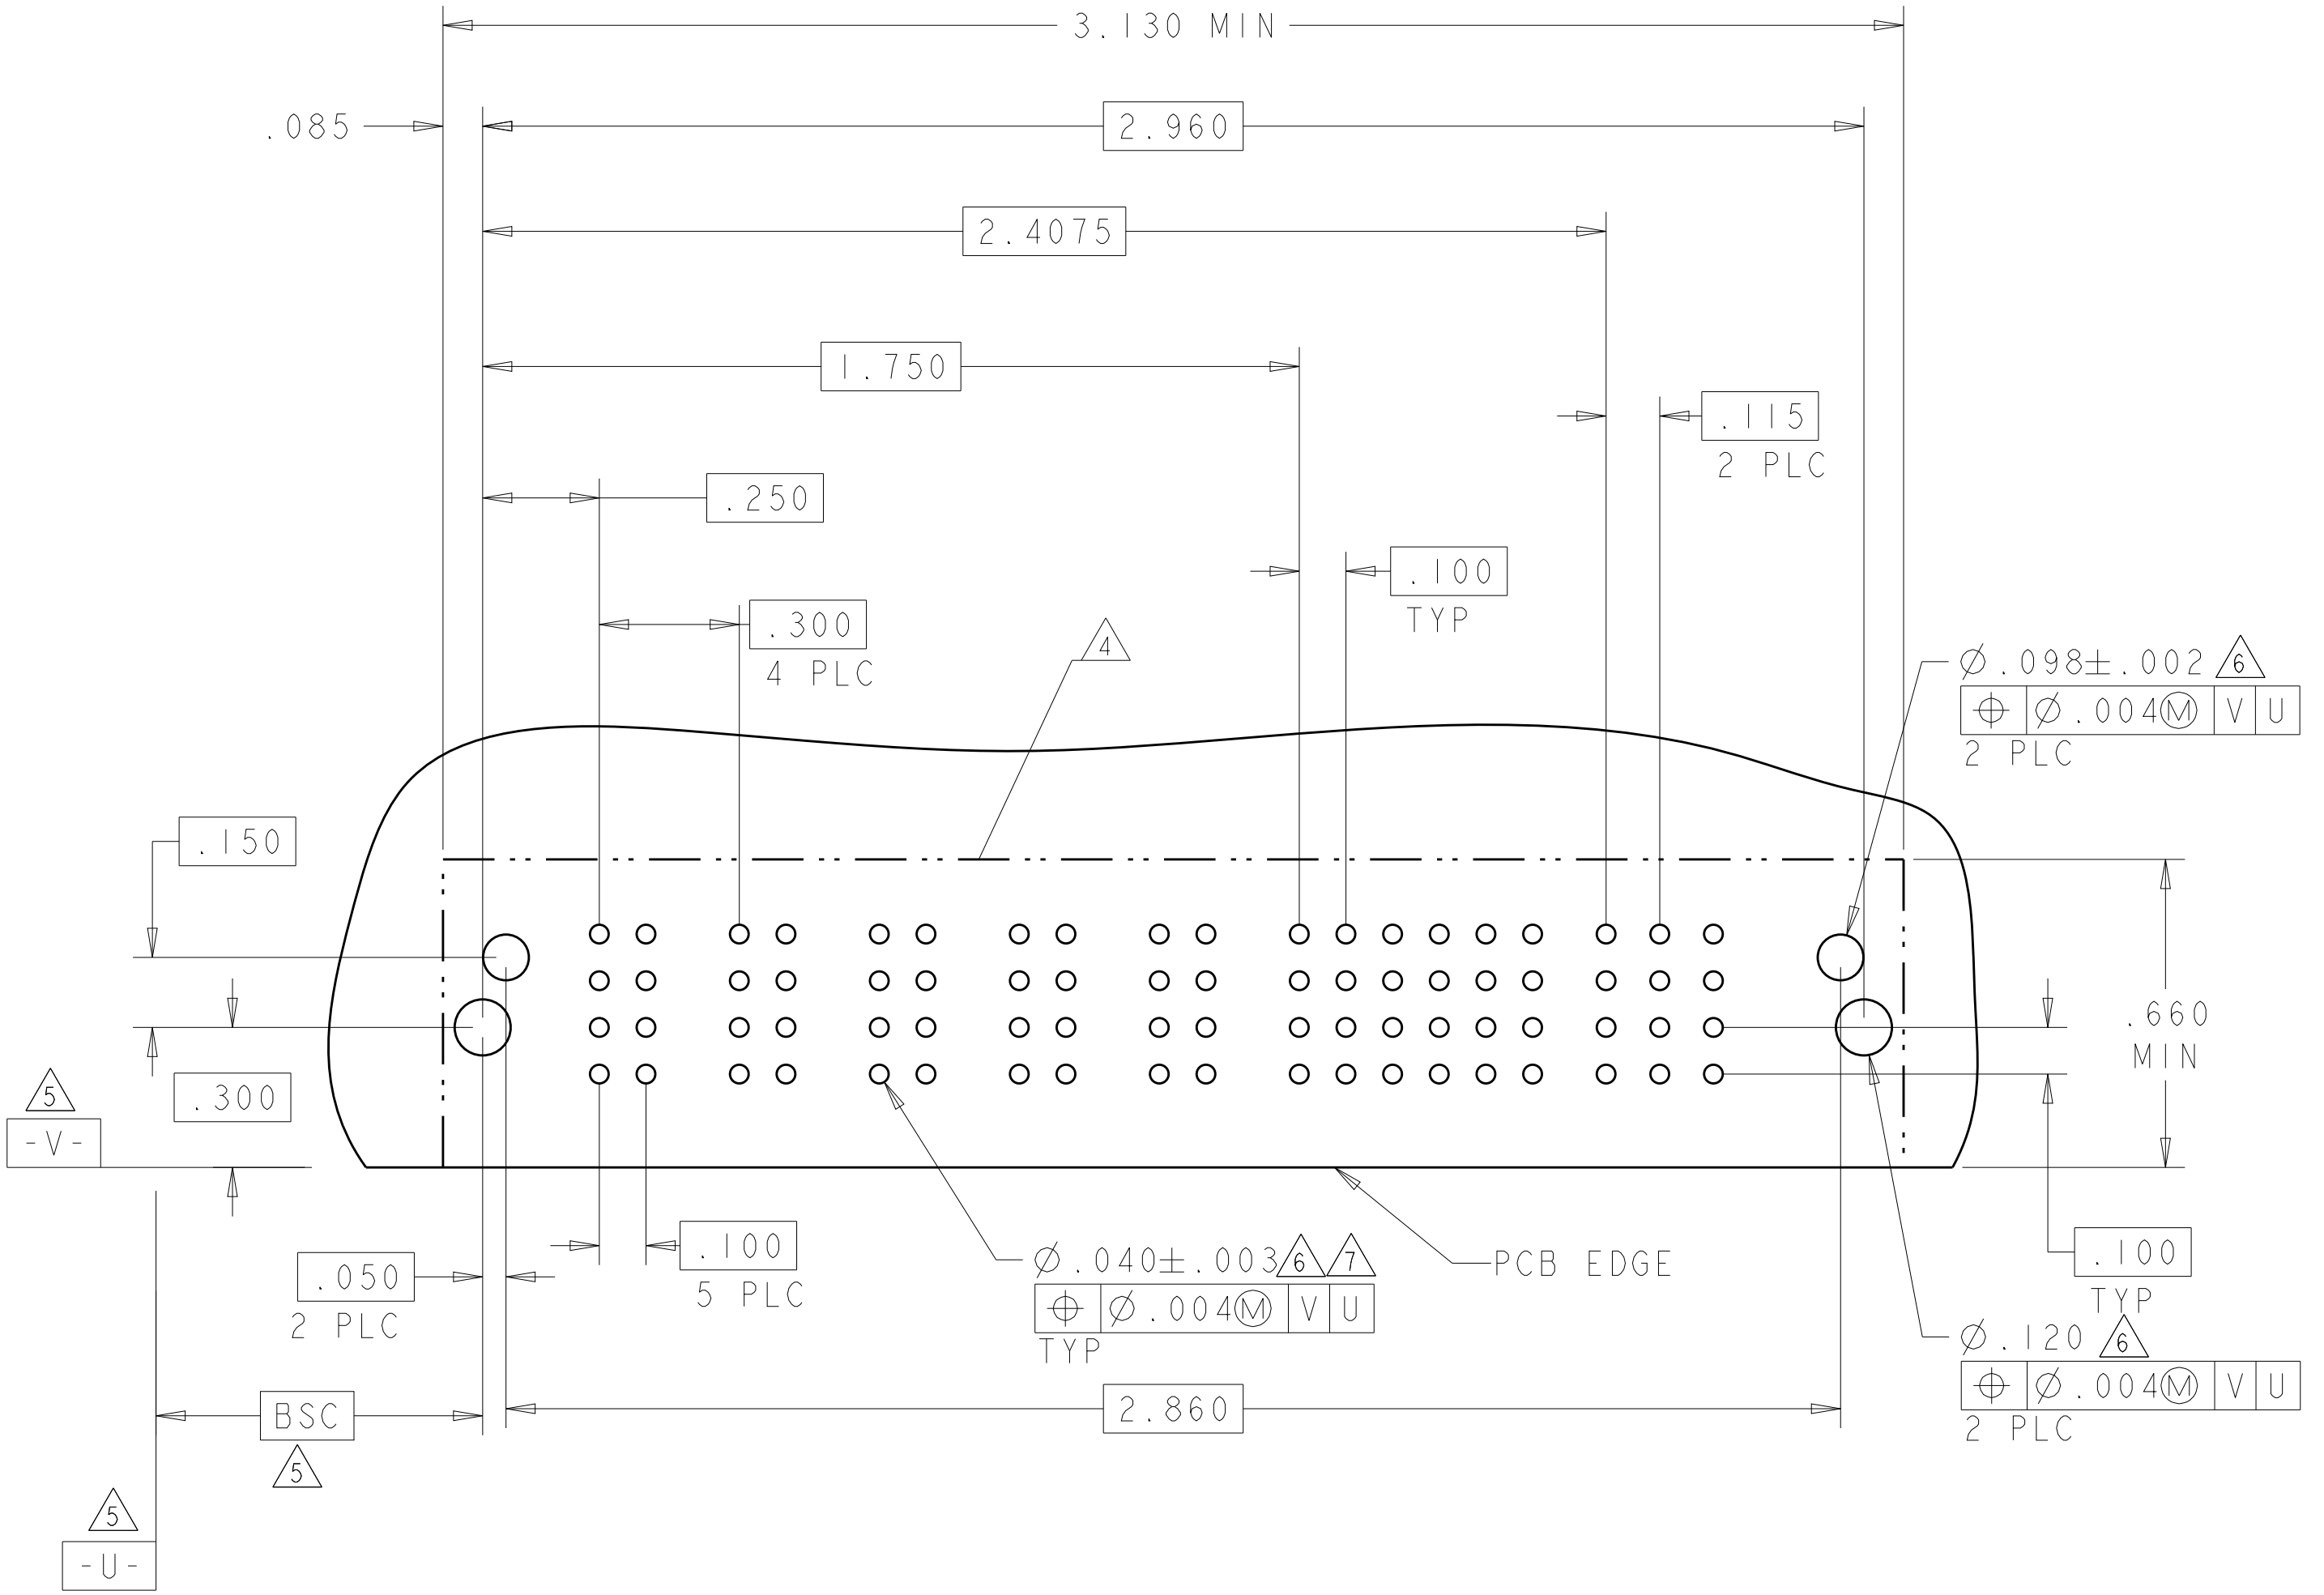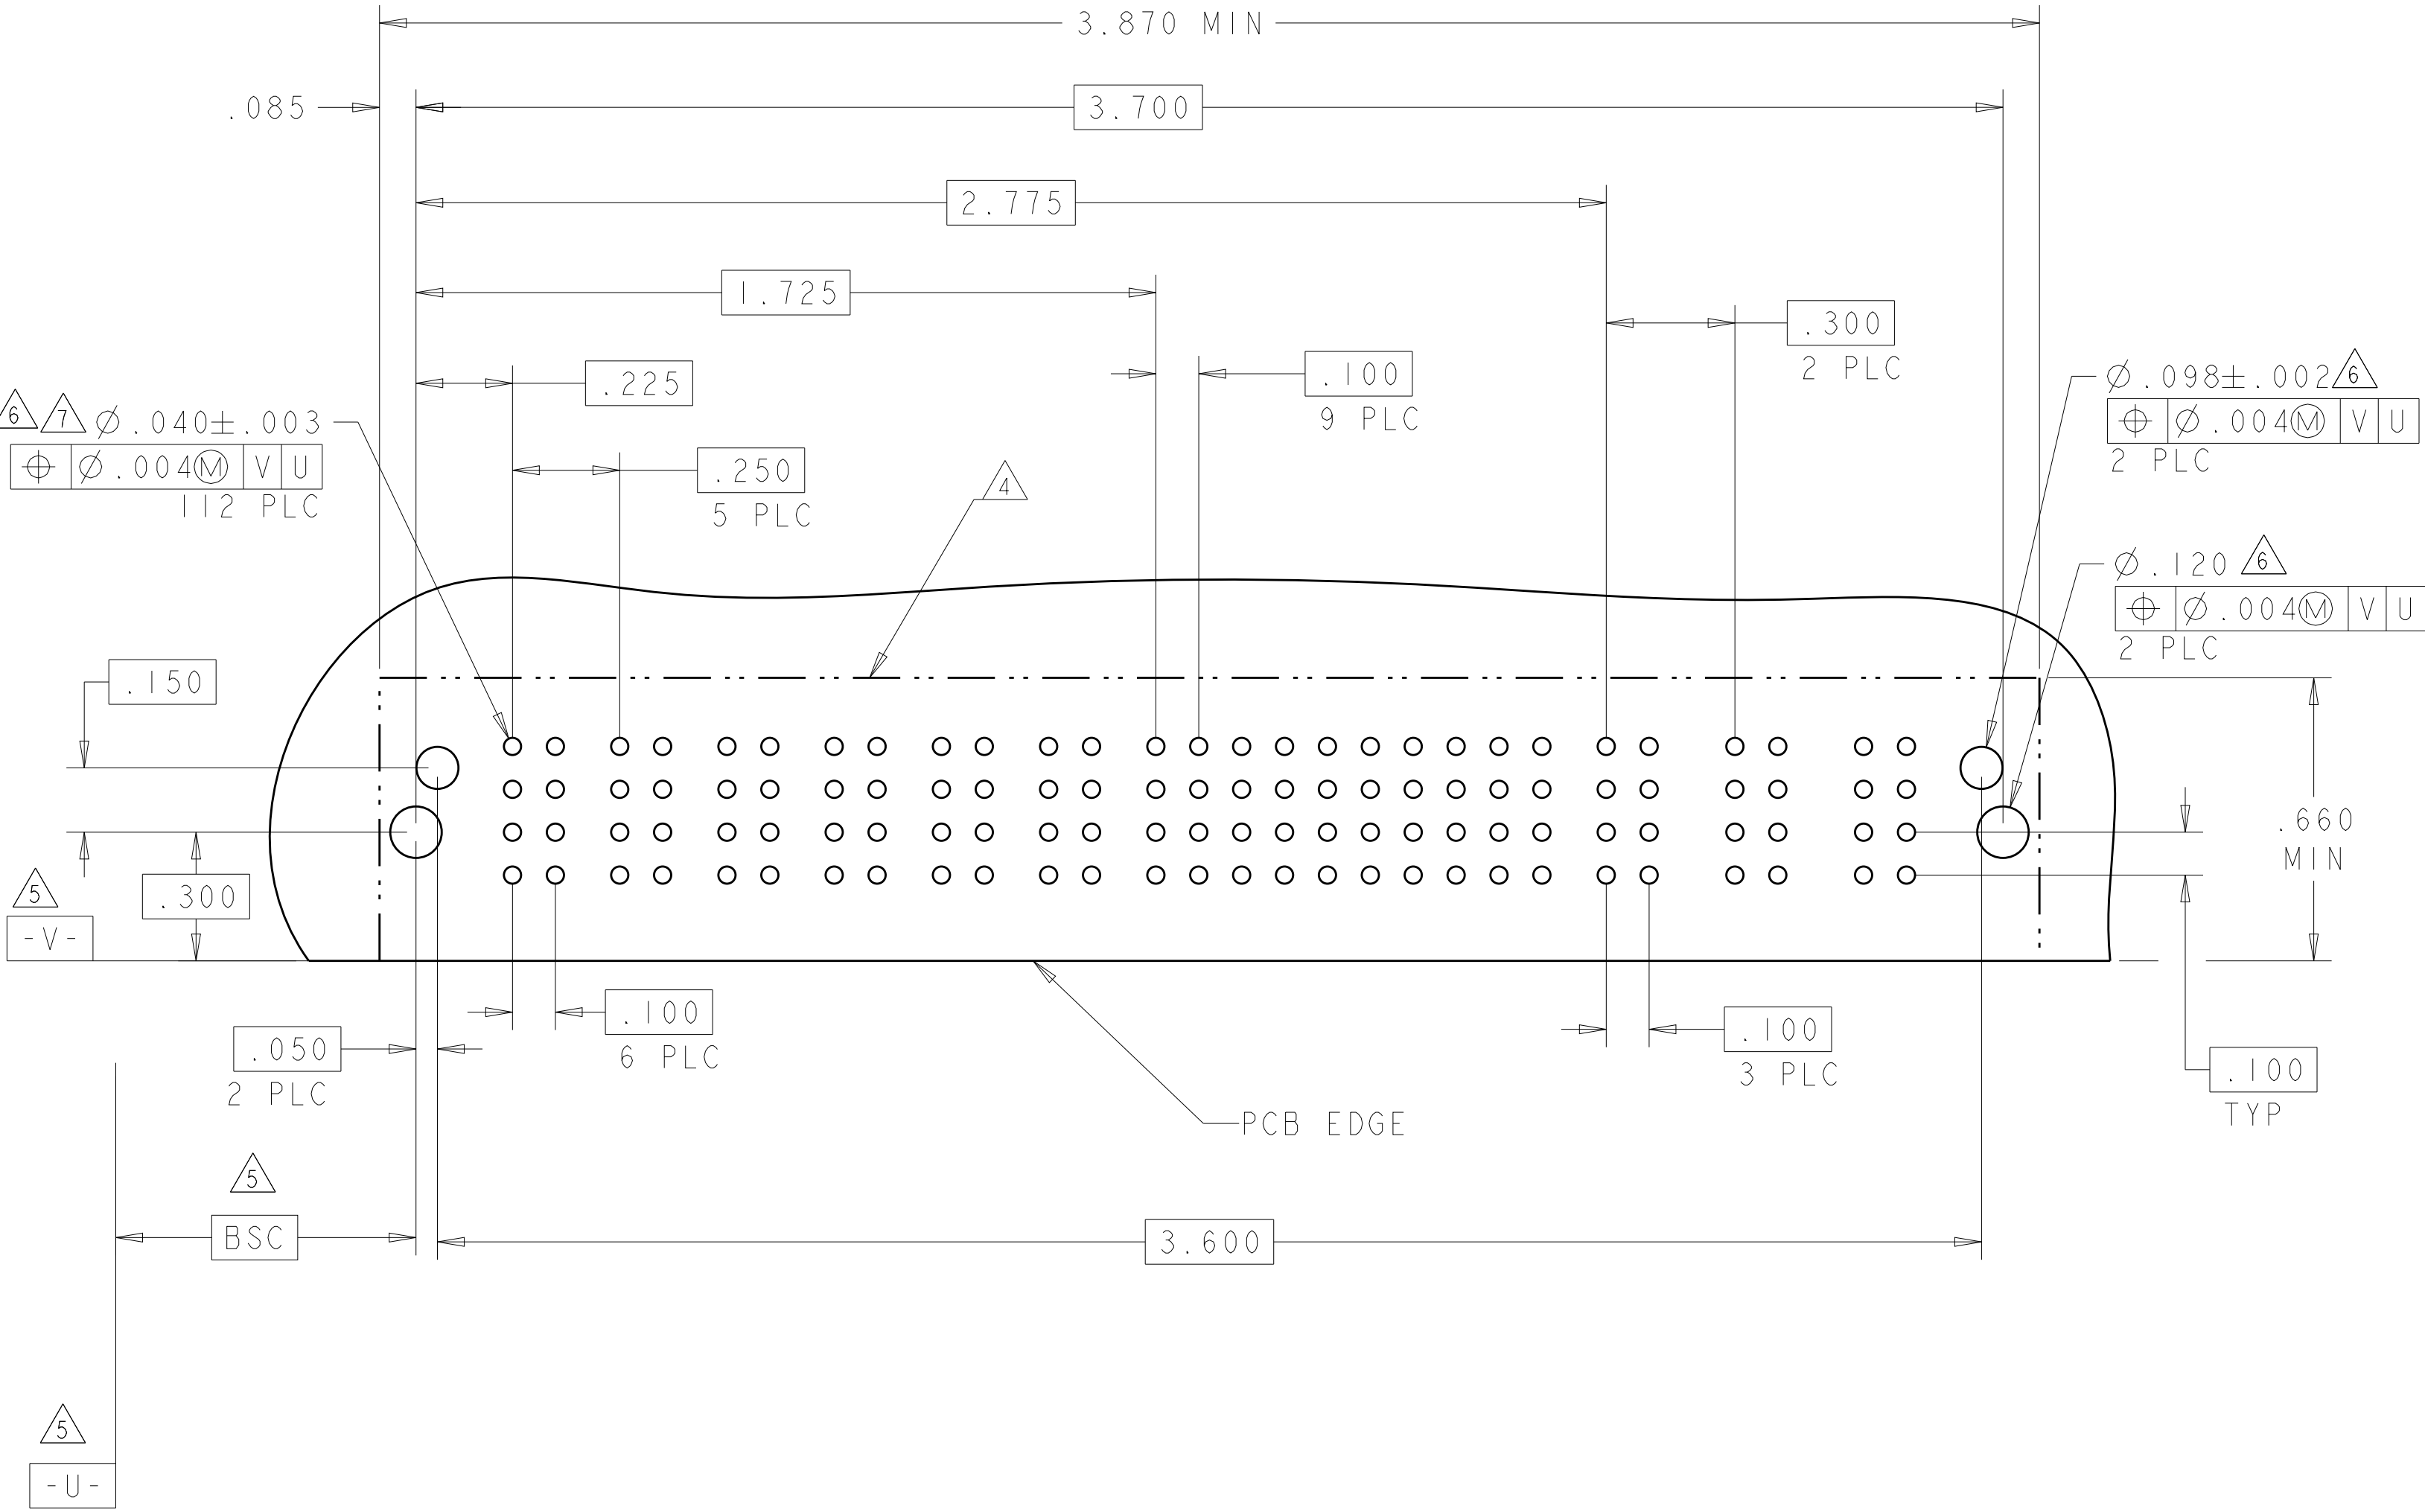

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN S.ZHAO 10APR2007
CHK S.ZHAO 10APR2007
APVD S.ZHAO -

DIMENSIONS:
INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±.
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.0020
ANGLES ±2°
FINISH -

MATERIAL -

PRODUCT SPEC 108-2292
APPLICATION SPEC 114-13251
WEIGHT -

CUSTOMER DRAWING

NAME RIGHT ANGLE WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM XLE

SIZE A1
CAGE CODE 00779
DRAWING NO. 6450830


RESTRICTED TO -

SCALE 4:1
SHEET 32 OF 42
REV S2


4805 (3/11)

PART NUMBER	ROWS		LOW POWER						SIGNAL																								LOW POWER						
			LP1	LP2	LP3	LP4	LP5	LP6	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	20	21	22	23	24	LP7	LP8	LP9	LP10				
6-6450830-9	D		LMF	LM	LM	LM	LMF	LM	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J				
	K								K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K
	N								N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N
	A	HD							S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S
6LP + 96S + 4LP																																							


[illegible]

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S_ZHAO 10APR2007		 TE Connectivity	
DIMENSIONS: INCHES 		CHG S_ZHAO 10APR2007			
		APVD S_ZHAO -			
		NAME			
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±. 1 PLC ±. 2 PLC ±.01 3 PLC ±.005 4 PLC ±.0020 ANGLES ±°		PRODUCT SPEC 108-2292		RIGHT ANGLE WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM XLE	
		APPLICATION SPEC 114-13251			
		SIZE CAGE CODE DRAWING NO RESTRICTED TO			
		MATERIAL -		WEIGHT -	
FINISH -		CUSTOMER DRAWING		SCALE 4:1 SHEET 34 OF 42 REV S2	

Timing diagram for the 4-bit parallel adder showing the propagation of a carry signal through four full adders. The carry signal starts at 0.300 (3 PLC) and propagates through the first, second, third, and fourth full adders, with delays of 0.350, 0.250, and 0.275 PLC respectively. The final carry signal is 0.275 (8 PLC).

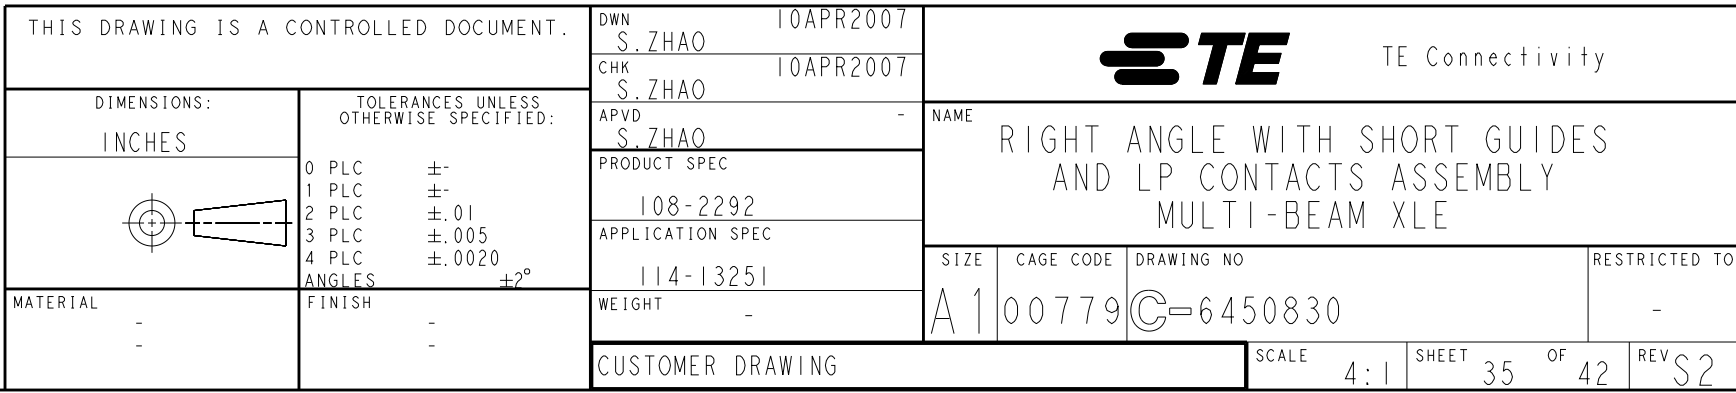


PART NUMBER	ROWS		POWER			SIGNAL				POWER			
			P1	P2	P3	1	2	3	4	P4	P5	P6	
7-6450830-3	D		TM	TM	TM	J	J	J	J	TM	TM	TM	
	K					K	K	K					
	N					N	N	N					
	S					H	H	S					
3P + 16S + 3P													

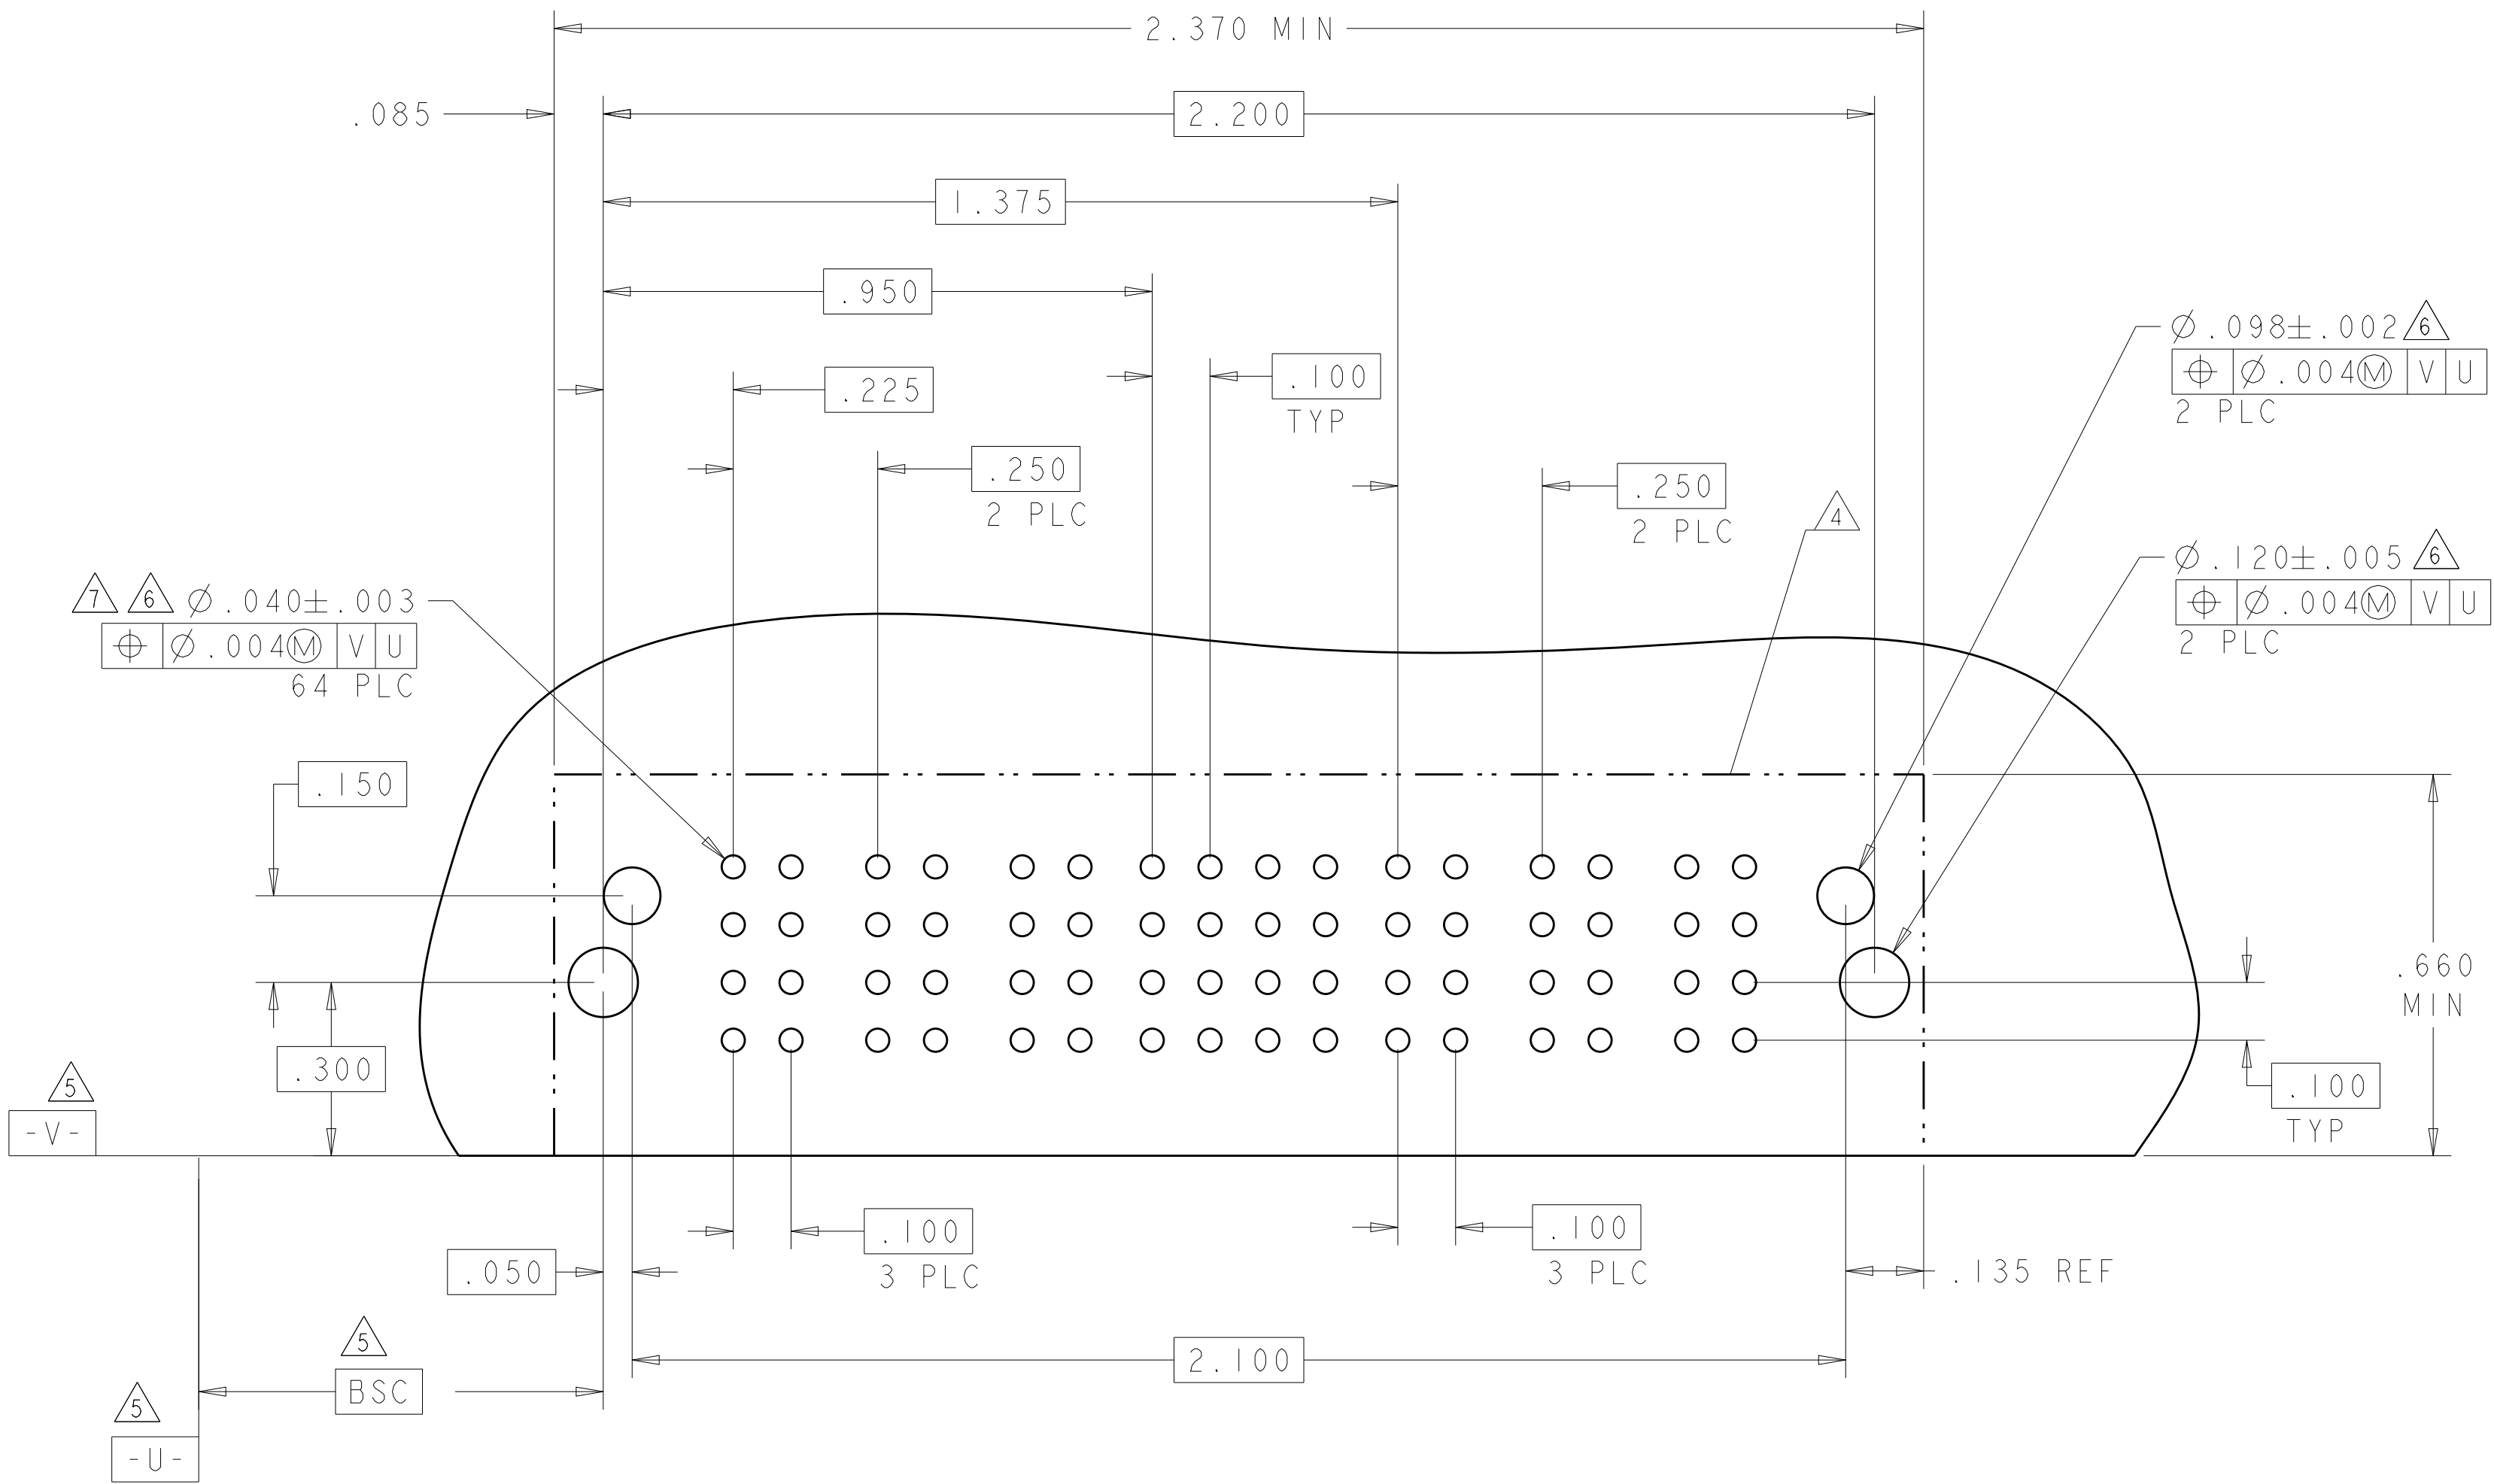4805 (3/11)

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-


PART NUMBER	ROWS		LOW POWER			SIGNAL			LOW POWER				
			LP1	LP2	LP3	1	2	3	LP4	LP5	LP6	LP7	
7-6450830-6	D		LM	LM	LM	J	J	J	LM	LM	LM	LM	
	C					K	K	K					
	B					N	N	N					
	A					S	S	S					
3LP + 12S + 4LP													

R3

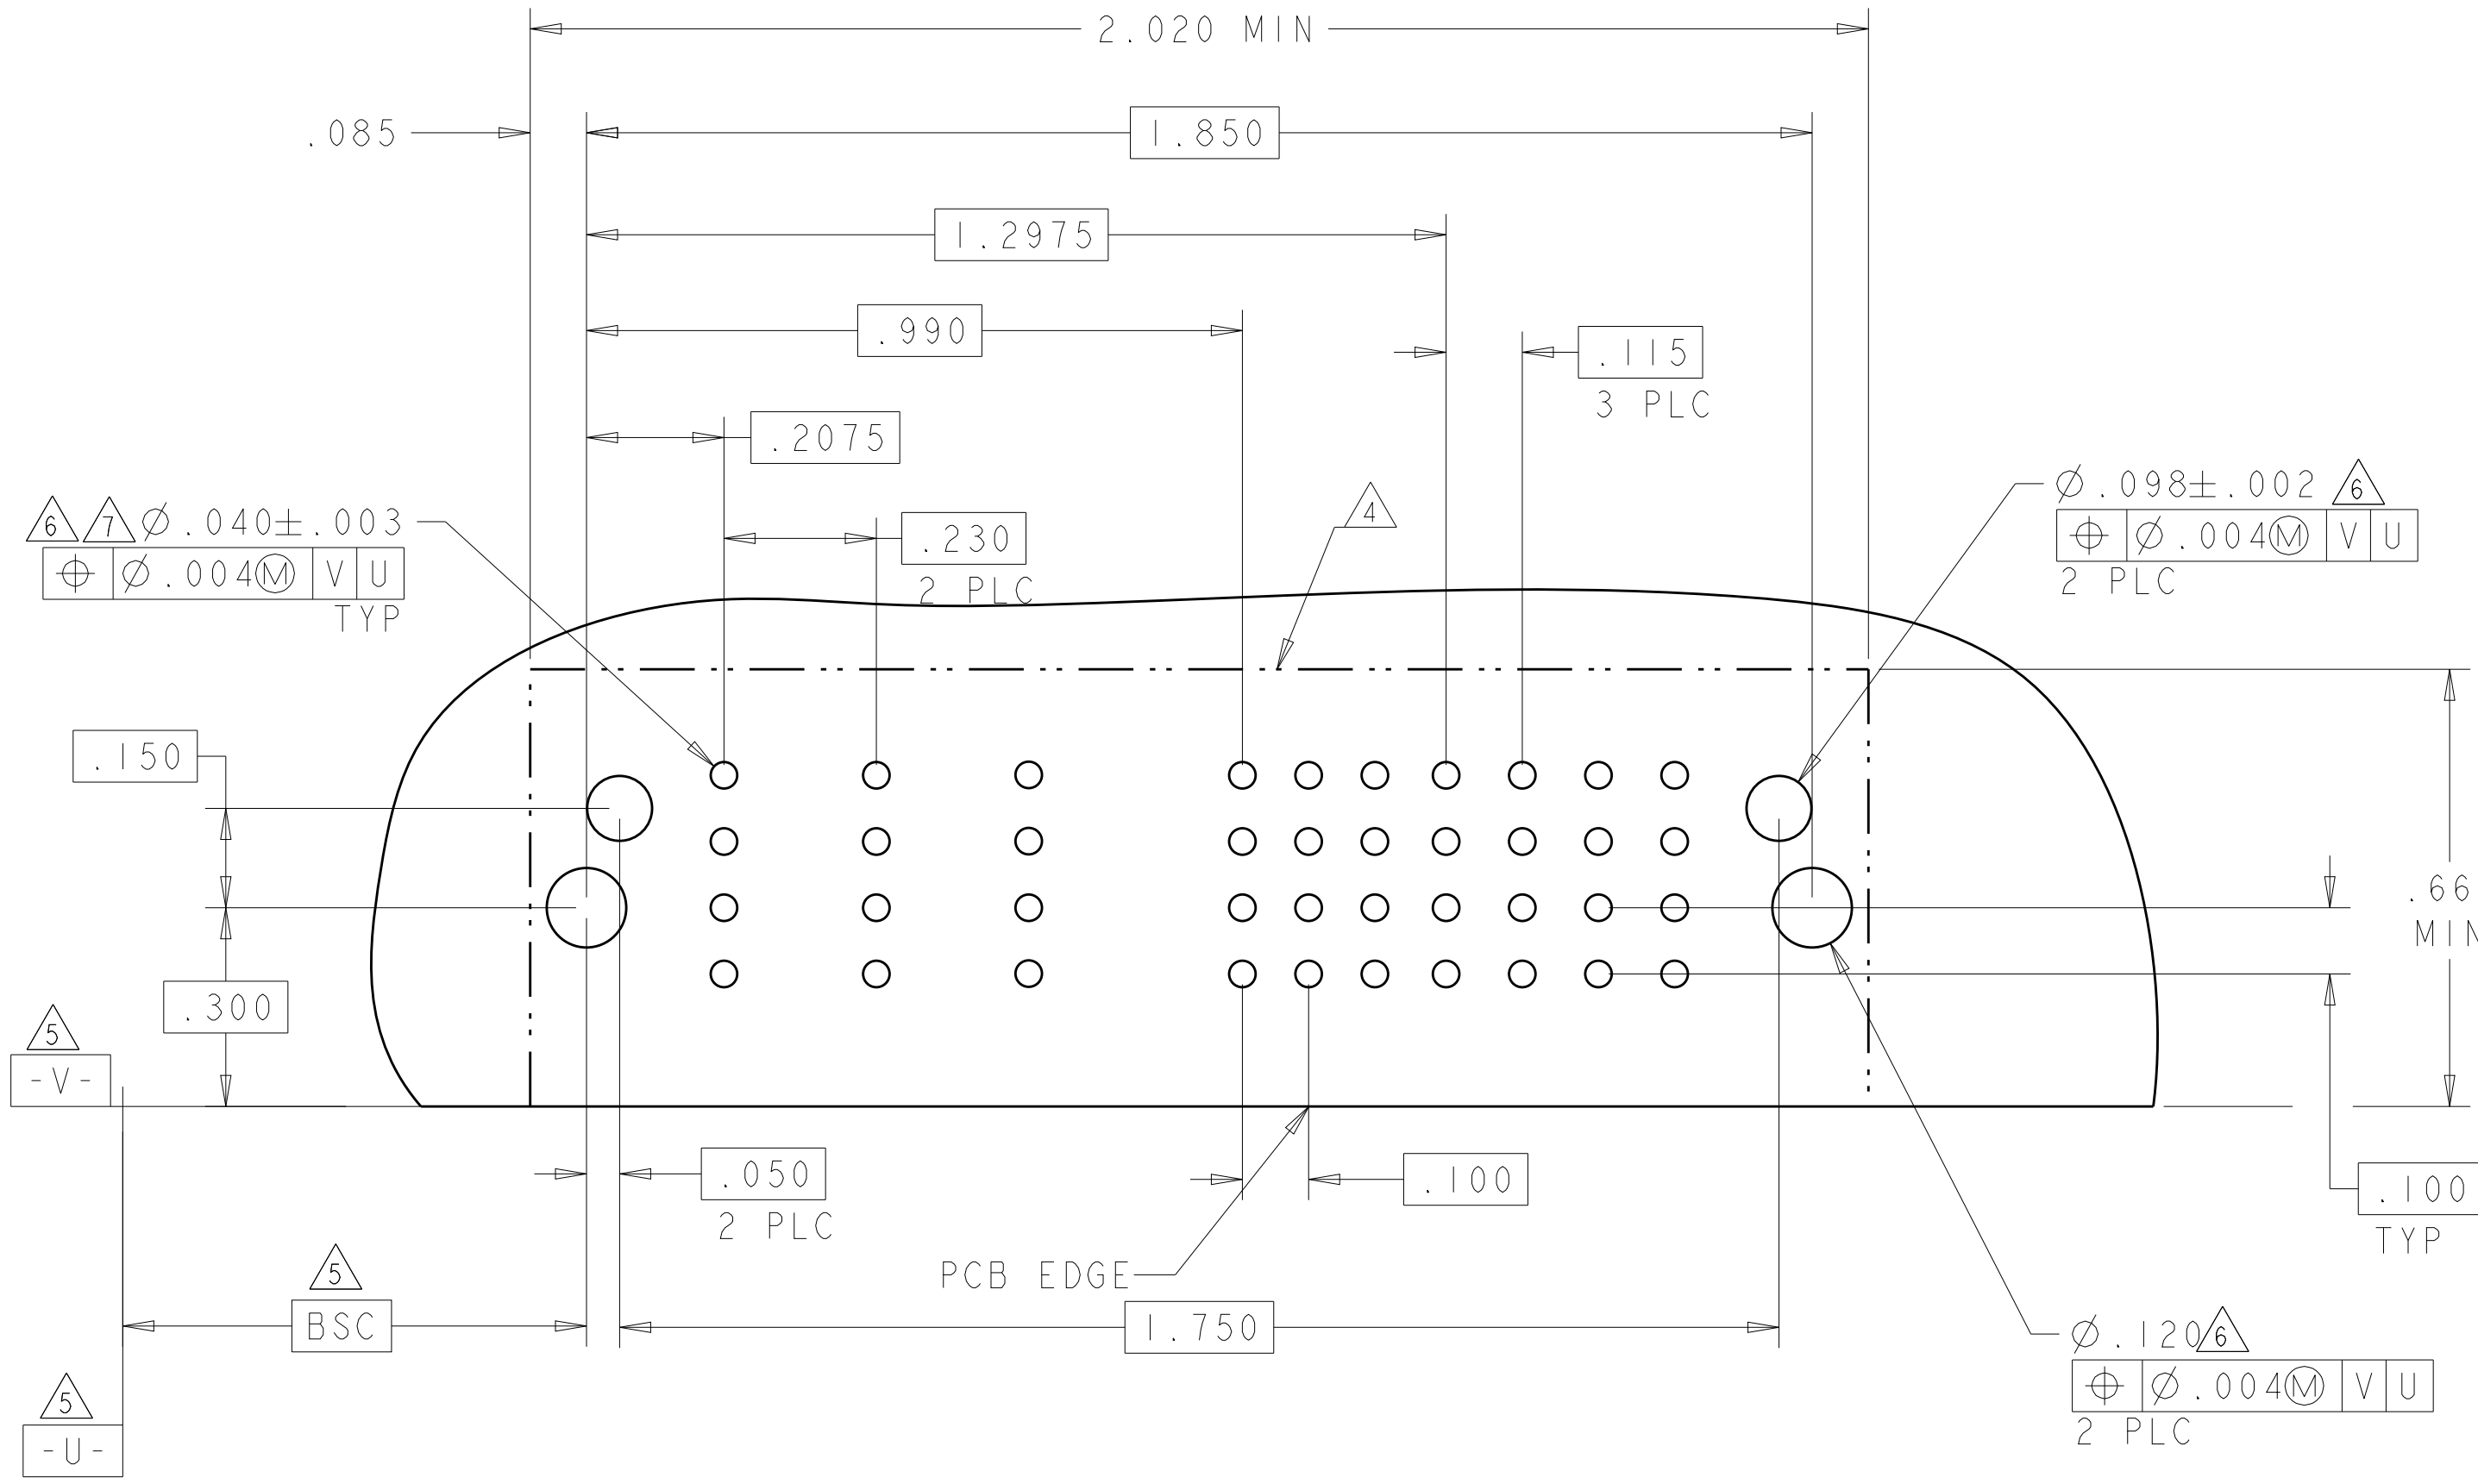

PART NUMBER	ROWS		POWER				SIGNAL												POWER	
			P1	P2	P3	P4	1	2	3	4	5	6	7	8	9	10	11	12	P4	
7-6450830-7	D		TM	TM	TM	TM	E			E	J		J		J	E		E	TM	
	C						F	F	F	F		K		K		F		F		
	B						G		G		N		N		N	G		N		
	A						H	H	H	H	H		S		H		H			
4P + 48S + 1P																				

BLANK SIGNAL PINS ARE UNLOADED PINS

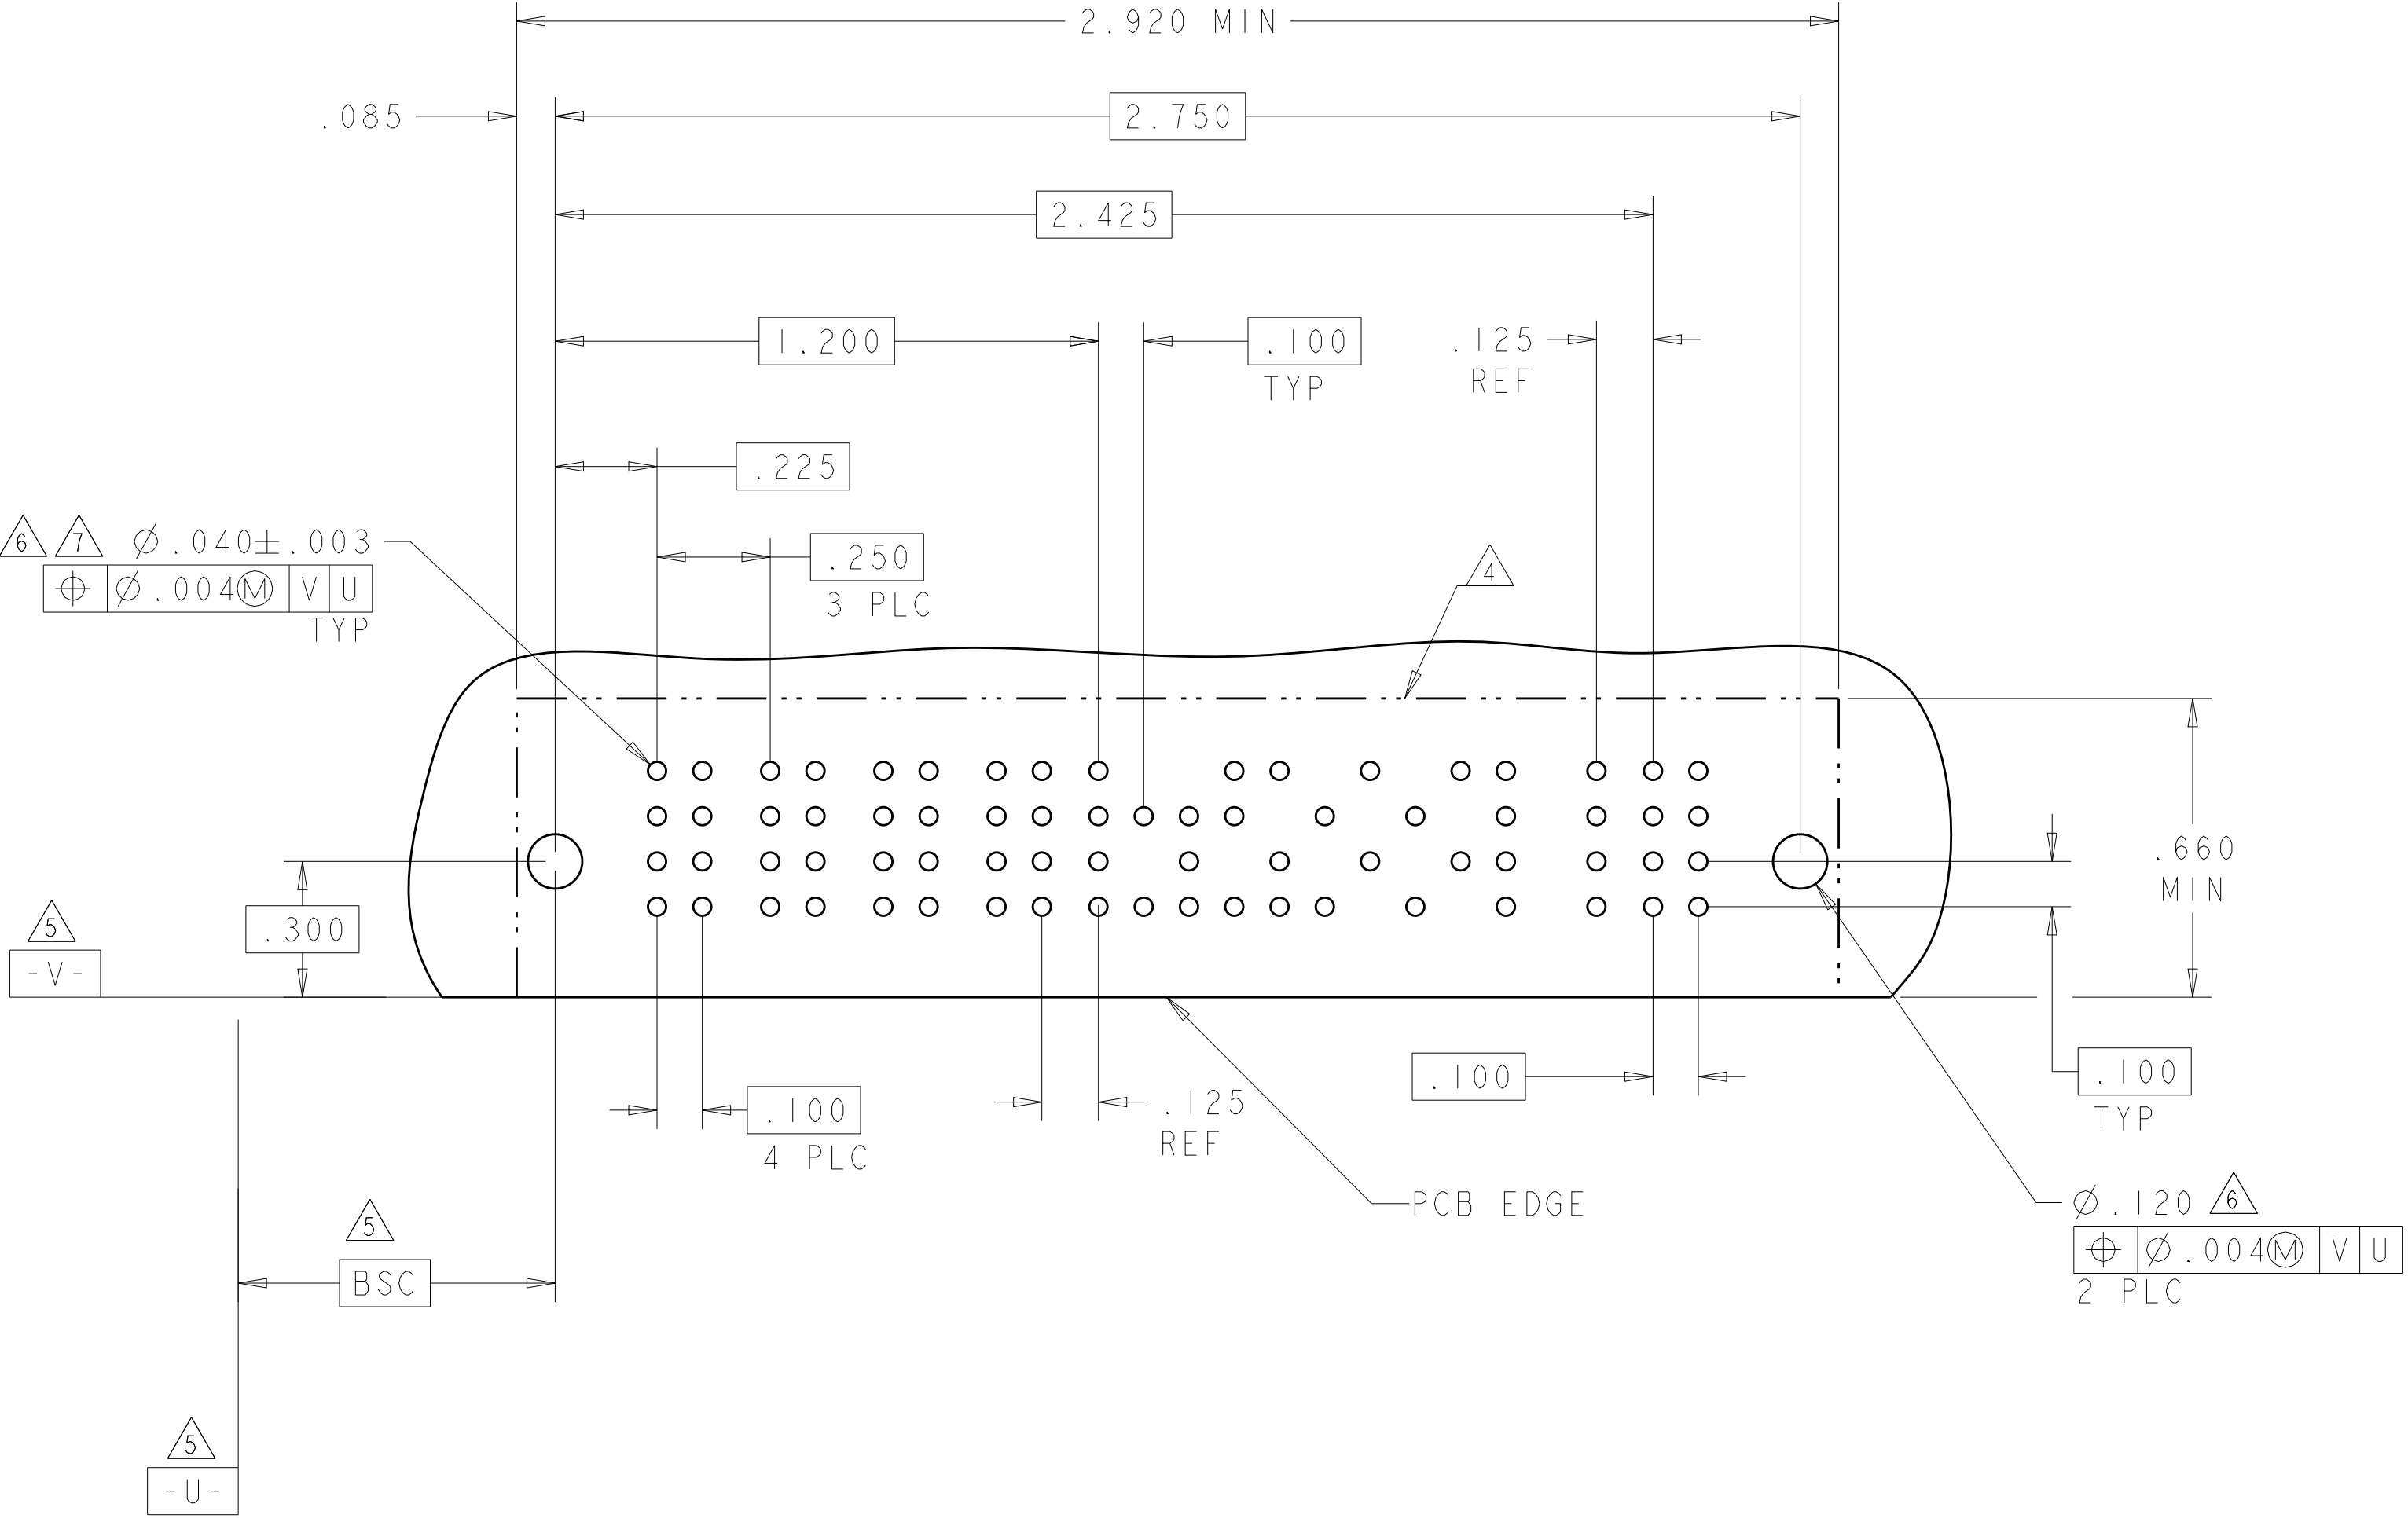

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
INCHES

MATERIAL

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC
1 PLC
2 PLC
3 PLC
4 PLC
ANGLES
FINISH

±
±.01
±.005
±.0020
#2°
-

DWN
CHK
APVD

S.ZHAO
S.ZHAO
S.ZHAO

10APR2007
10APR2007
-

PRODUCT SPEC
APPLICATION SPEC

108-2292
114-13251

SIZE
CAGE CODE
DRAWING NO

A100779
C=6450830

RESTRICTED TO

-

CUSTOMER DRAWING

SCALE
4:1


SHEET
37


OF
42

REV
S2

TE Connectivity

RIGHT ANGLE WITH SHORT GUIDES
AND LP CONTACTS ASSEMBLY
MULTI-BEAM XLE

PART NUMBER	ROWS		LOW POWER												SIGNAL															POWER						
			LP1	LP2	LP3	LP4	LP5	LP6	LP7	LP8	LP9	LP10	LP12	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	P1	P2	P3	P4				
7-6450830-8	D		LM	LM	LM	LM	LM	LM	LM	LM	LM	LM	LM	J	J	J	J	J	J	J	J	J	J	J	J	J	J	TM	TM	TM	TM					
	K													K	K	K	K	K	K	K	K	K	K	K	K	K	K						K	K	K	
	N													N	N	N	N	N	N	N	N	N	N	N	N	N	N						N	N	N	N
	S													S	S	S	S	S	S	S	S	S	S	S	S	S	S						S	S	S	S
12LP + 60S + 4P			HD																												HD					

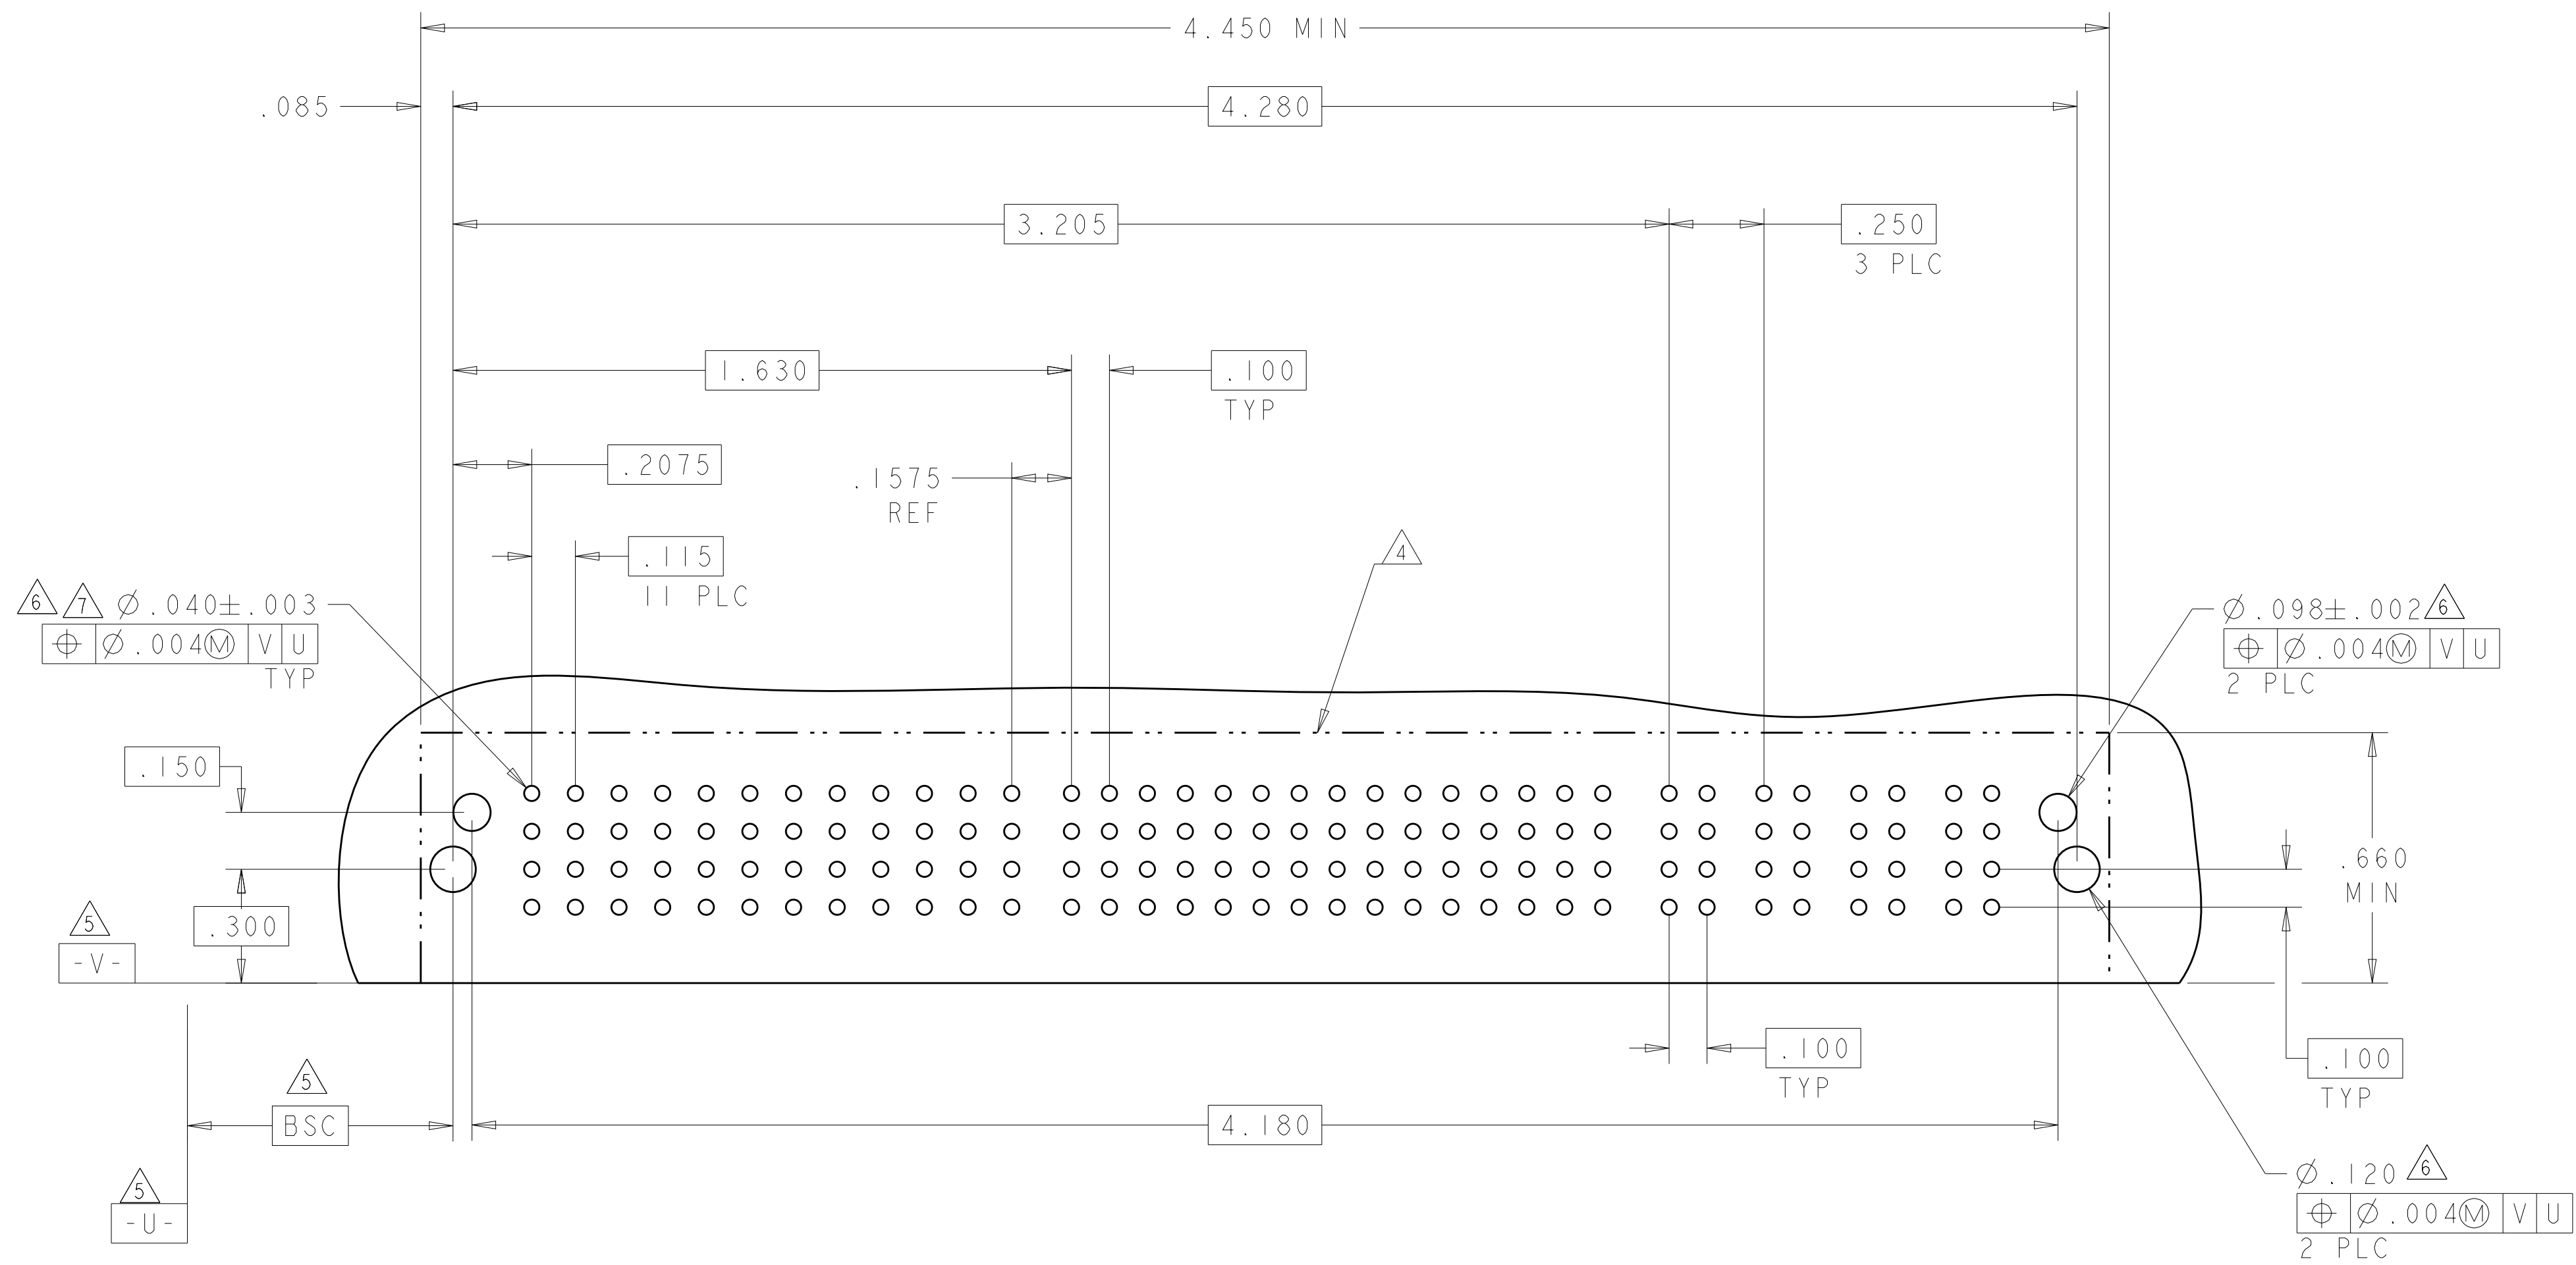

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S_ZHAO 10APR2007		 TE Connectivity	
DIMENSIONS:		CHN S_ZHAO 10APR2007			
INCHES		APVD S_ZHAO -		NAME	
		TOLERANCES UNLESS OTHERWISE SPECIFIED:		RIGHT ANGLE WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM XLE	
		0 PLC ±		PRODUCT SPEC	
		1 PLC ±		108-2292	
		2 PLC ±.01		APPLICATION SPEC	
3 PLC ±.005		114-13251		SIZE	
4 PLC ±.0020		WEIGHT -		CAGE CODE	
ANGLES ±°		CUSTOMER DRAWING		DRAWING NO	
FINISH		SCALE 4:1		SHEET 38 OF 42	
MATERIAL		REV S2		RESTRICTED TO	

4.570 MIN

.085

4.400

2.575

.250
6 PLC

1.950

.100
TYP

.225

.250
6 PLC

$\triangle 6 \triangle \phi .040 \pm .003$
 $\oplus \phi .004 \textcircled{M} V U$
TYP

.150

.300

5
-V-

5
BSC

.050
2 PLC

.100
7 PLC

PCB EDGE

.100
7 PLC

.100
TYP

4

$\phi .098 \pm .002 \triangle 6$
 $\oplus \phi .004 \textcircled{M} V U$
2 PLC


.660
MIN

$\phi .120 \triangle 6$
 $\oplus \phi .004 \textcircled{M} V U$
2 PLC

4.300


5
-U-

4805 (3/11)

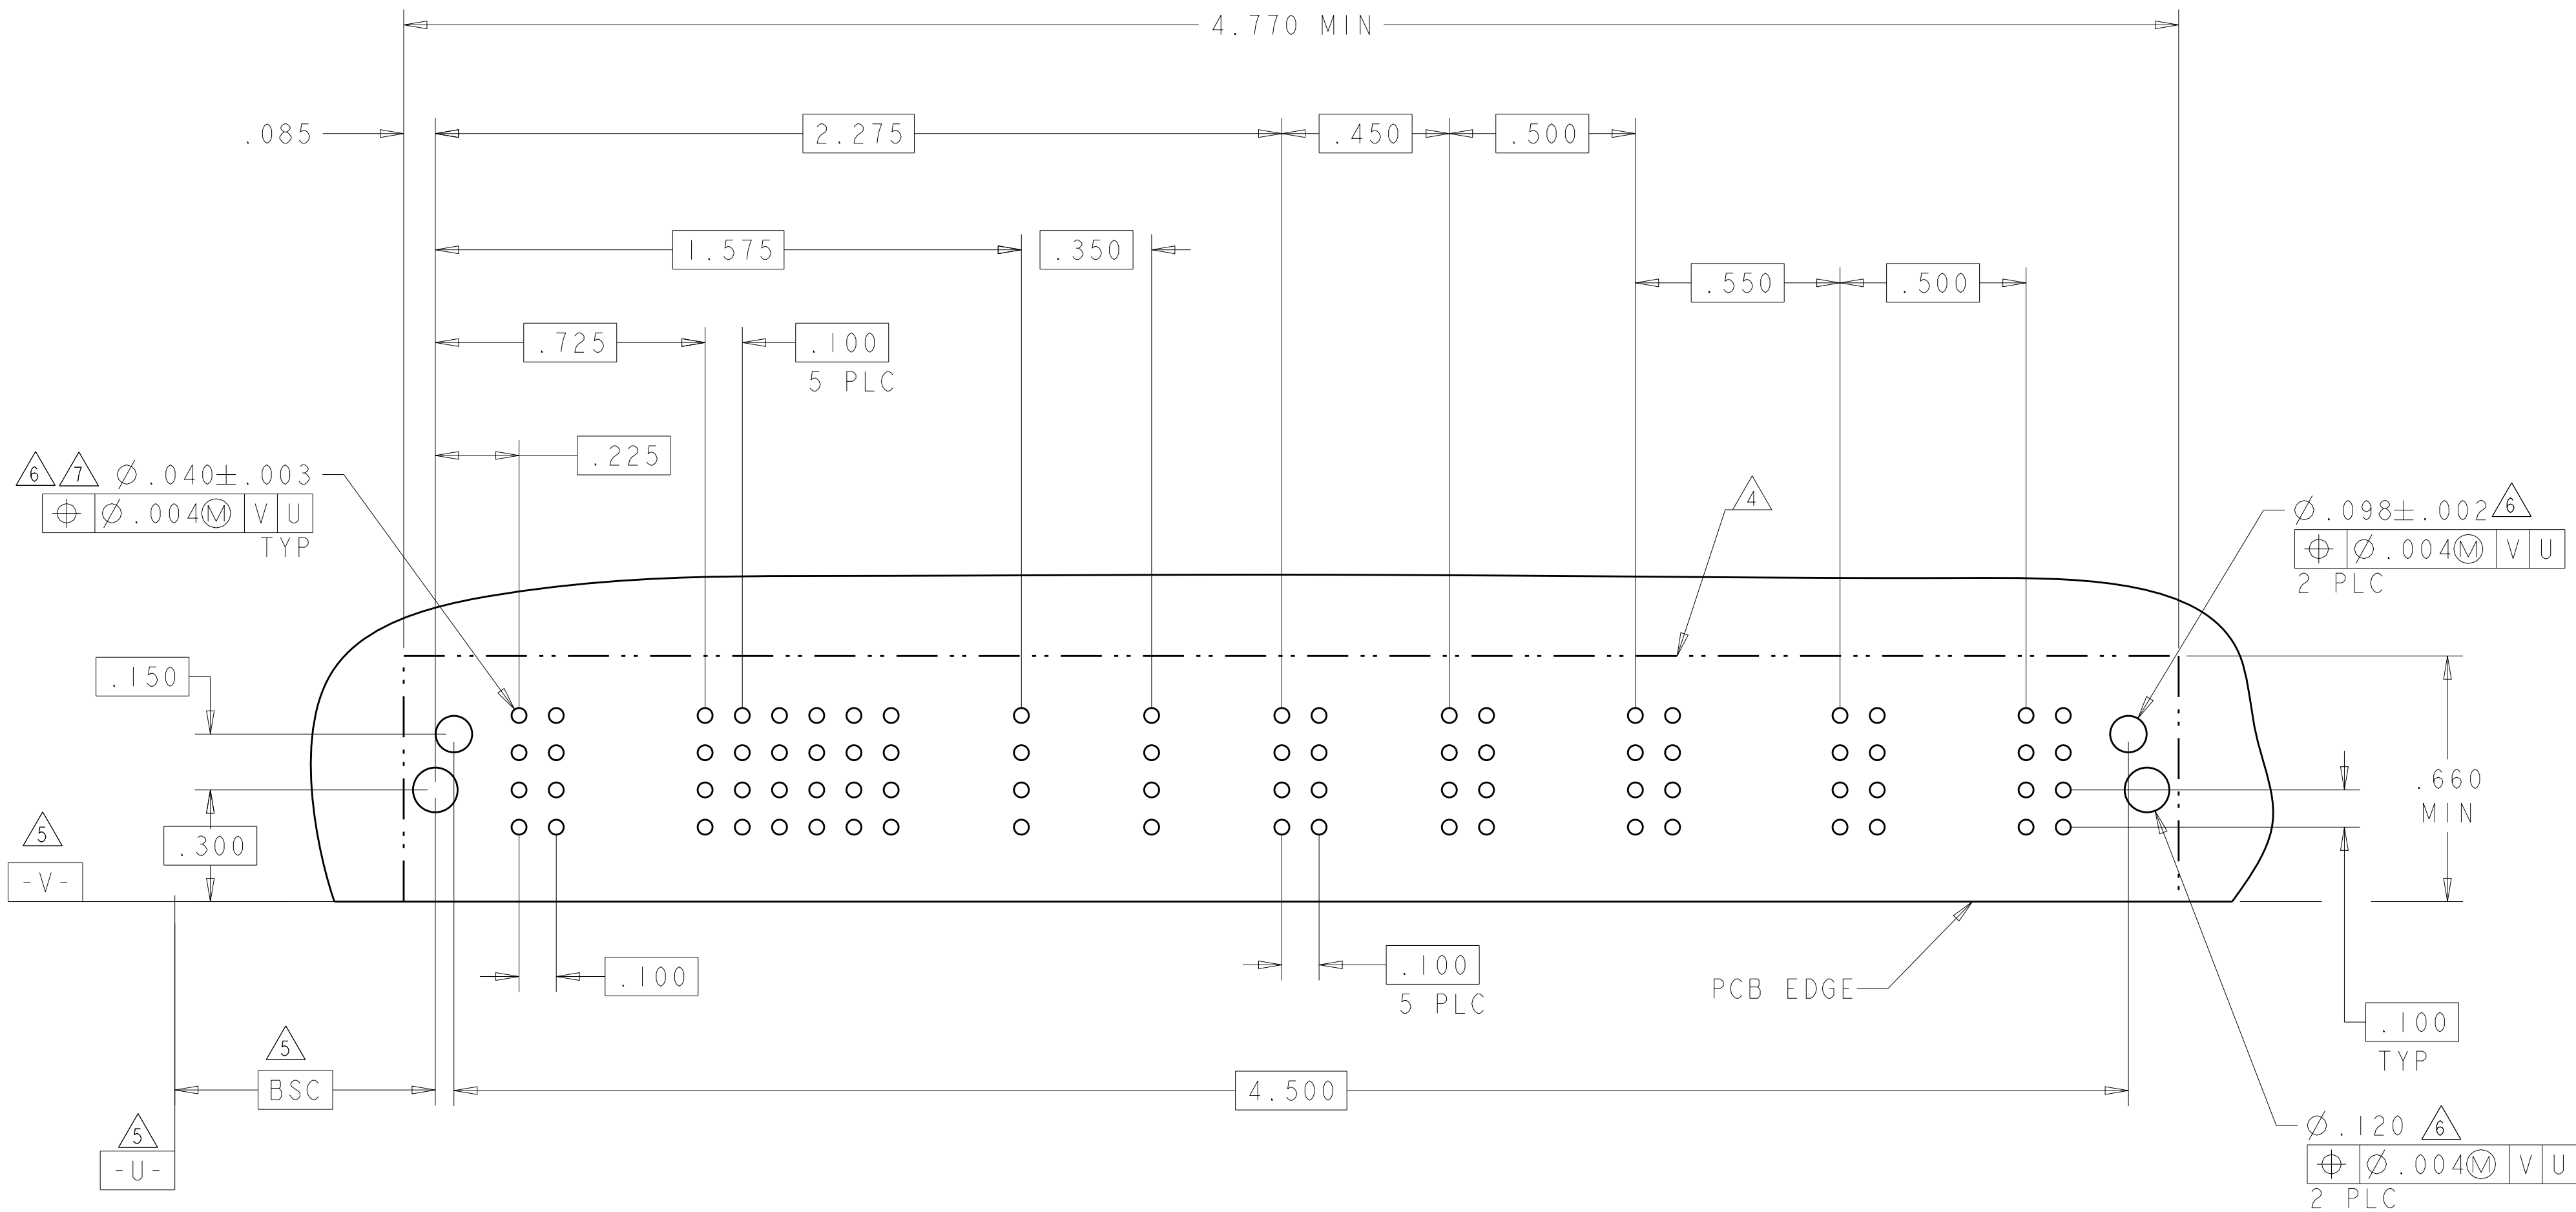4805 (3/11)

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
ES	00	-	-	SEE SHEET 1	-	-

PART NUMBER	ROWS		POWER			SIGNAL				POWER			
			P1	P2	P3	1	2	3	4	P4	P5	P6	
8-6450830-0	D		TM	TM	TM	J	J	J	J	TM	TM	TM	
	K					K	K	K					
	N					N	N	N					
	S					S	S	S					
3ACP + 16S + 3P													

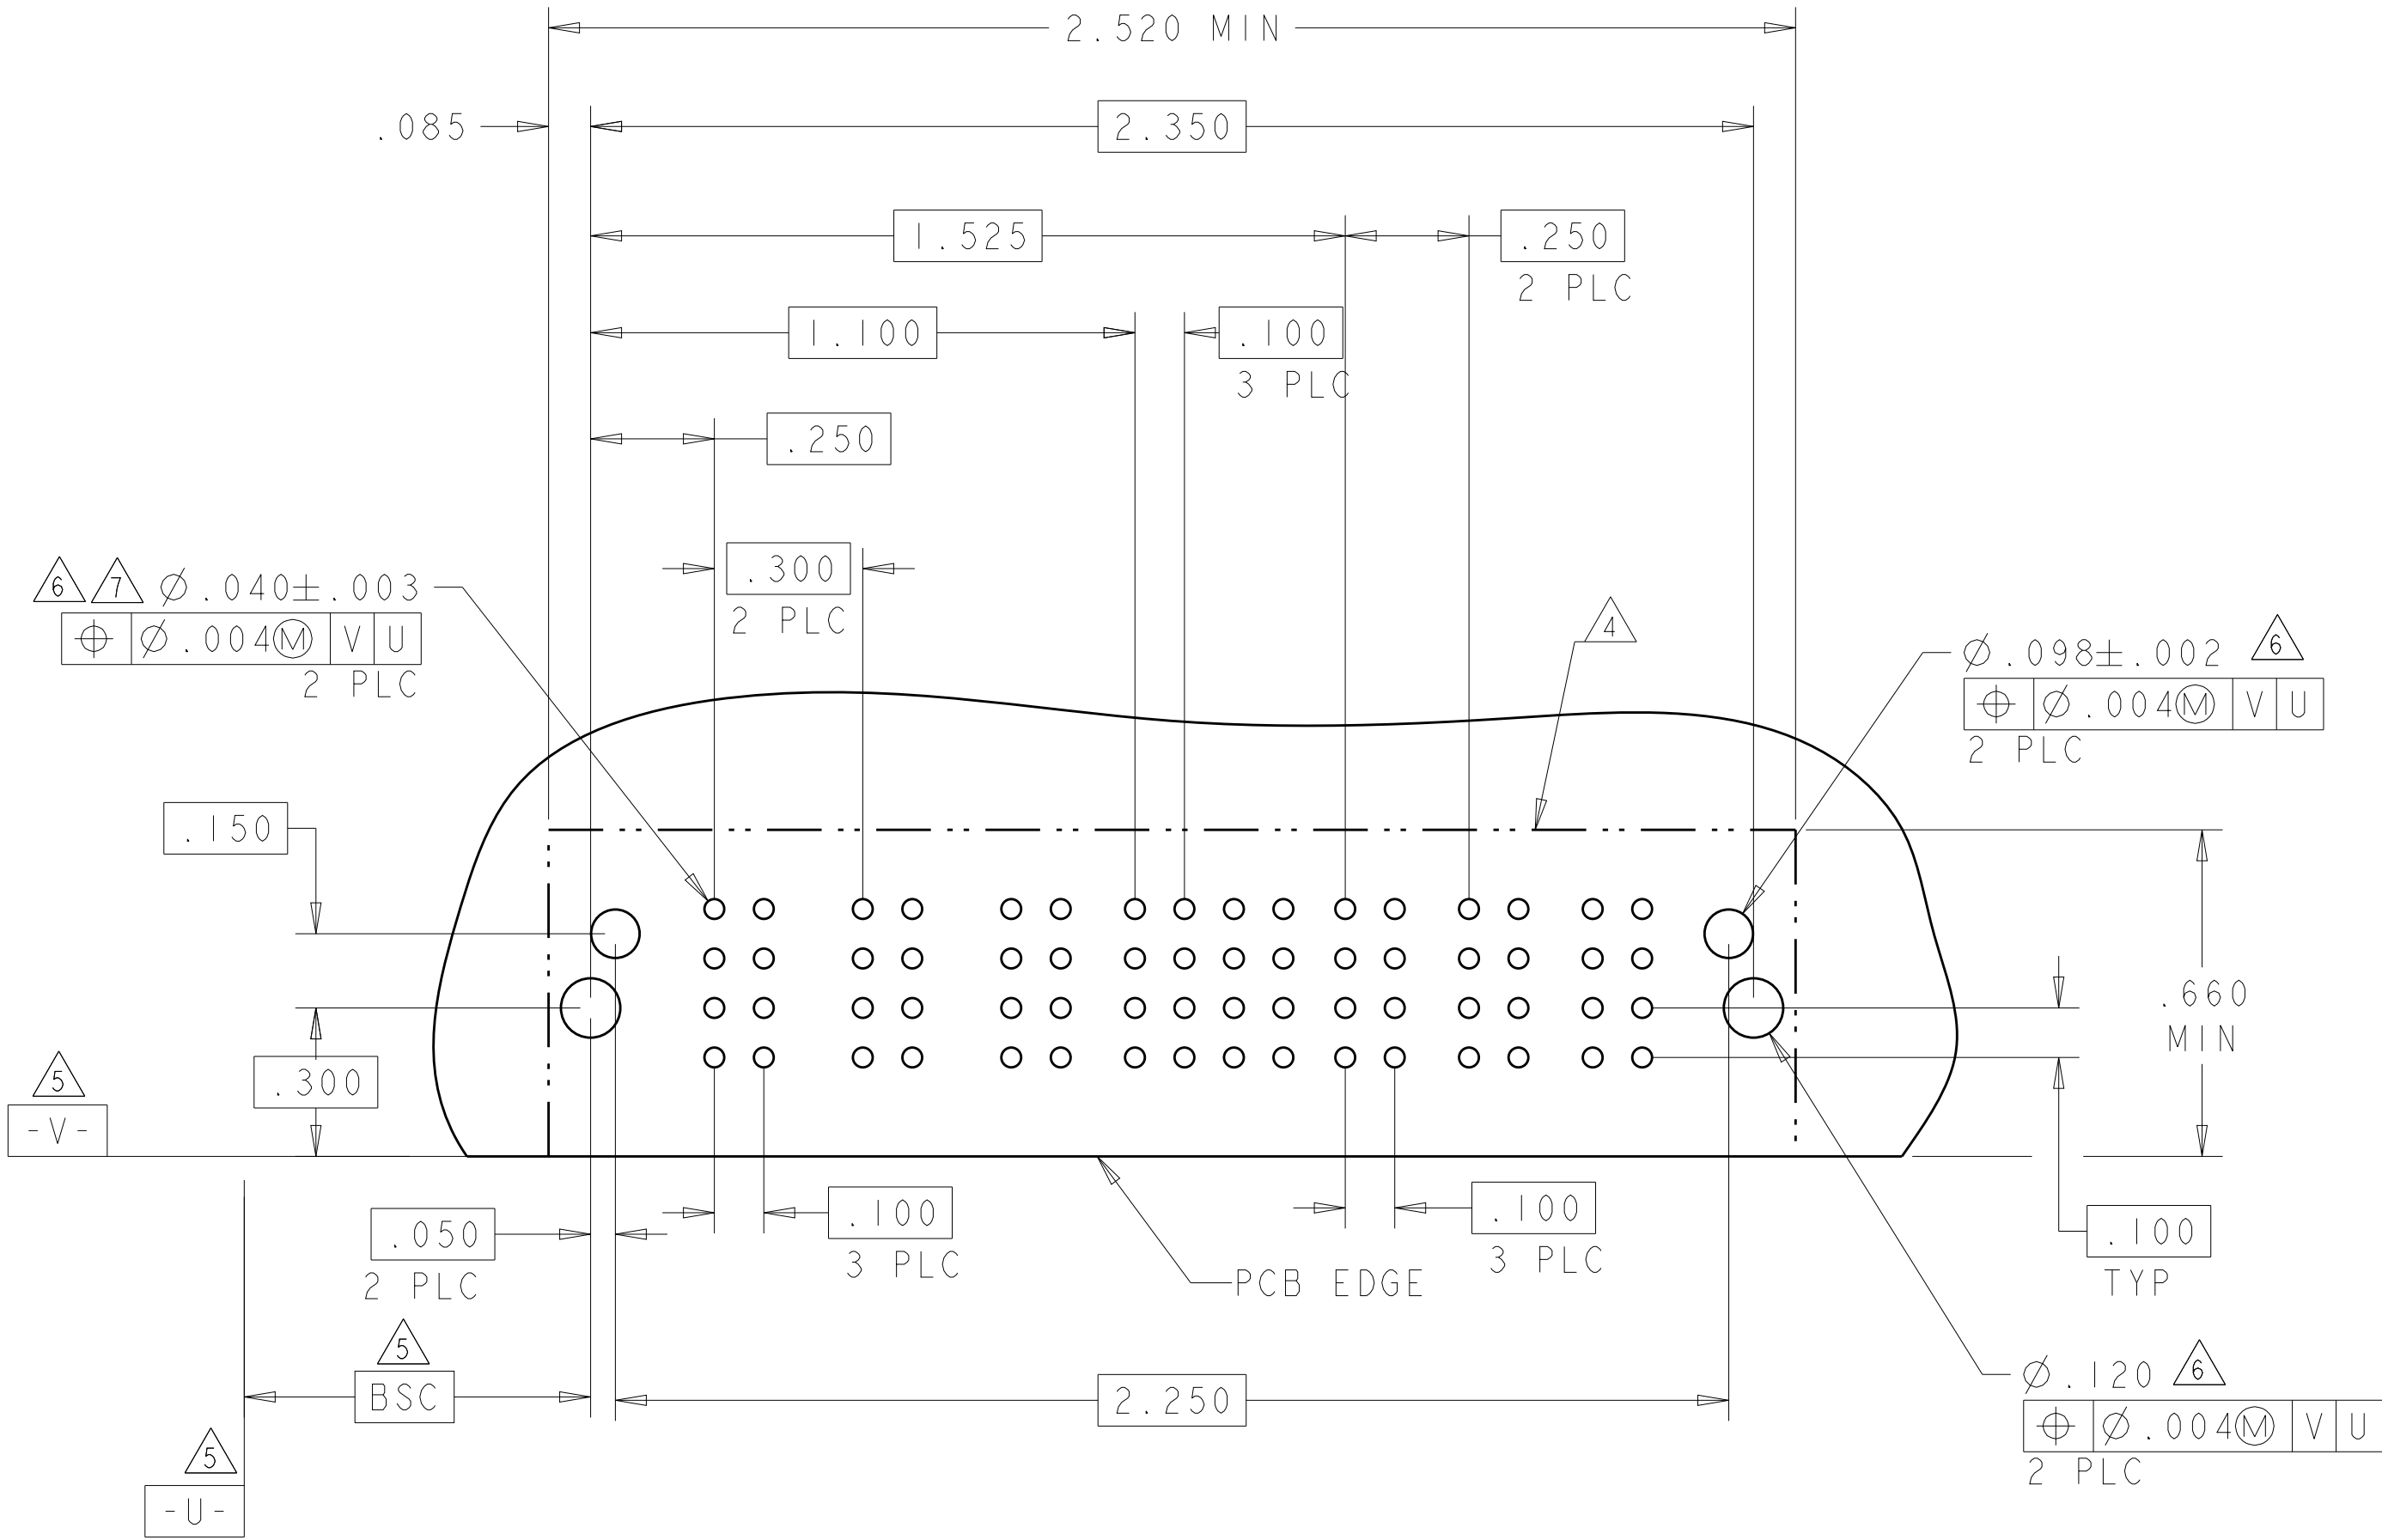


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. ZHAO CHK S. ZHAO APVD S. ZHAO	10APR2007 10APR2007 -	TE Connectivity	
DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	PRODUCT SPEC	NAME	RIGHT ANGLE WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM XLE	
	0 PLC ±" 1 PLC ±.01 2 PLC ±.01 3 PLC ±.005 4 PLC ±.0020 ANGLES #2° FINISH	108-2292 APPLICATION SPEC	SIZE		
MATERIAL	-	WEIGHT	CAGE CODE	DRAWING NO	RESTRICTED TO
-	-	-	A100779	C=6450830	-
CUSTOMER DRAWING			SCALE	SHEET	REV
			4:1	41	S2

LOC	DIST	REVISIONS			
		P	LTR	DESCRIPTION	DATE
ES	00	-	-	SEE SHEET 1	-

PART NUMBER	ROWS		LOW POWER									SIGNAL									POWER	LOW POWER															
			LP1	LP2	LP3	LP4	LP5	LP6	LP7	LP8	LP9	1	2	3	4	5	6	7	8	9		P1	LP10	LP11	LP12	LP13	LP14	LP15	LP16	LP17	LP18	LP19	LP20	LP21	LP22	LP23	
8-6450830-2	D		LM	LM	LM	LMF	-	LMF	LM	LM	LM	E	E	E	E	E	-	-	E	E	TM	-	-	LML	LML	LML	LML	LML	LML	LML	LML	-	LML	LML	LML	LML	
	C											F	F	F	F	F	-	-	F	F																	
	B											G	G	G	G	G	-	-	G	G																	
	A											H	H	H	H	H	-	-	H	H																	
9LP + 36S + 1P + 16LP																																					

- NO CONTACTS LOADED

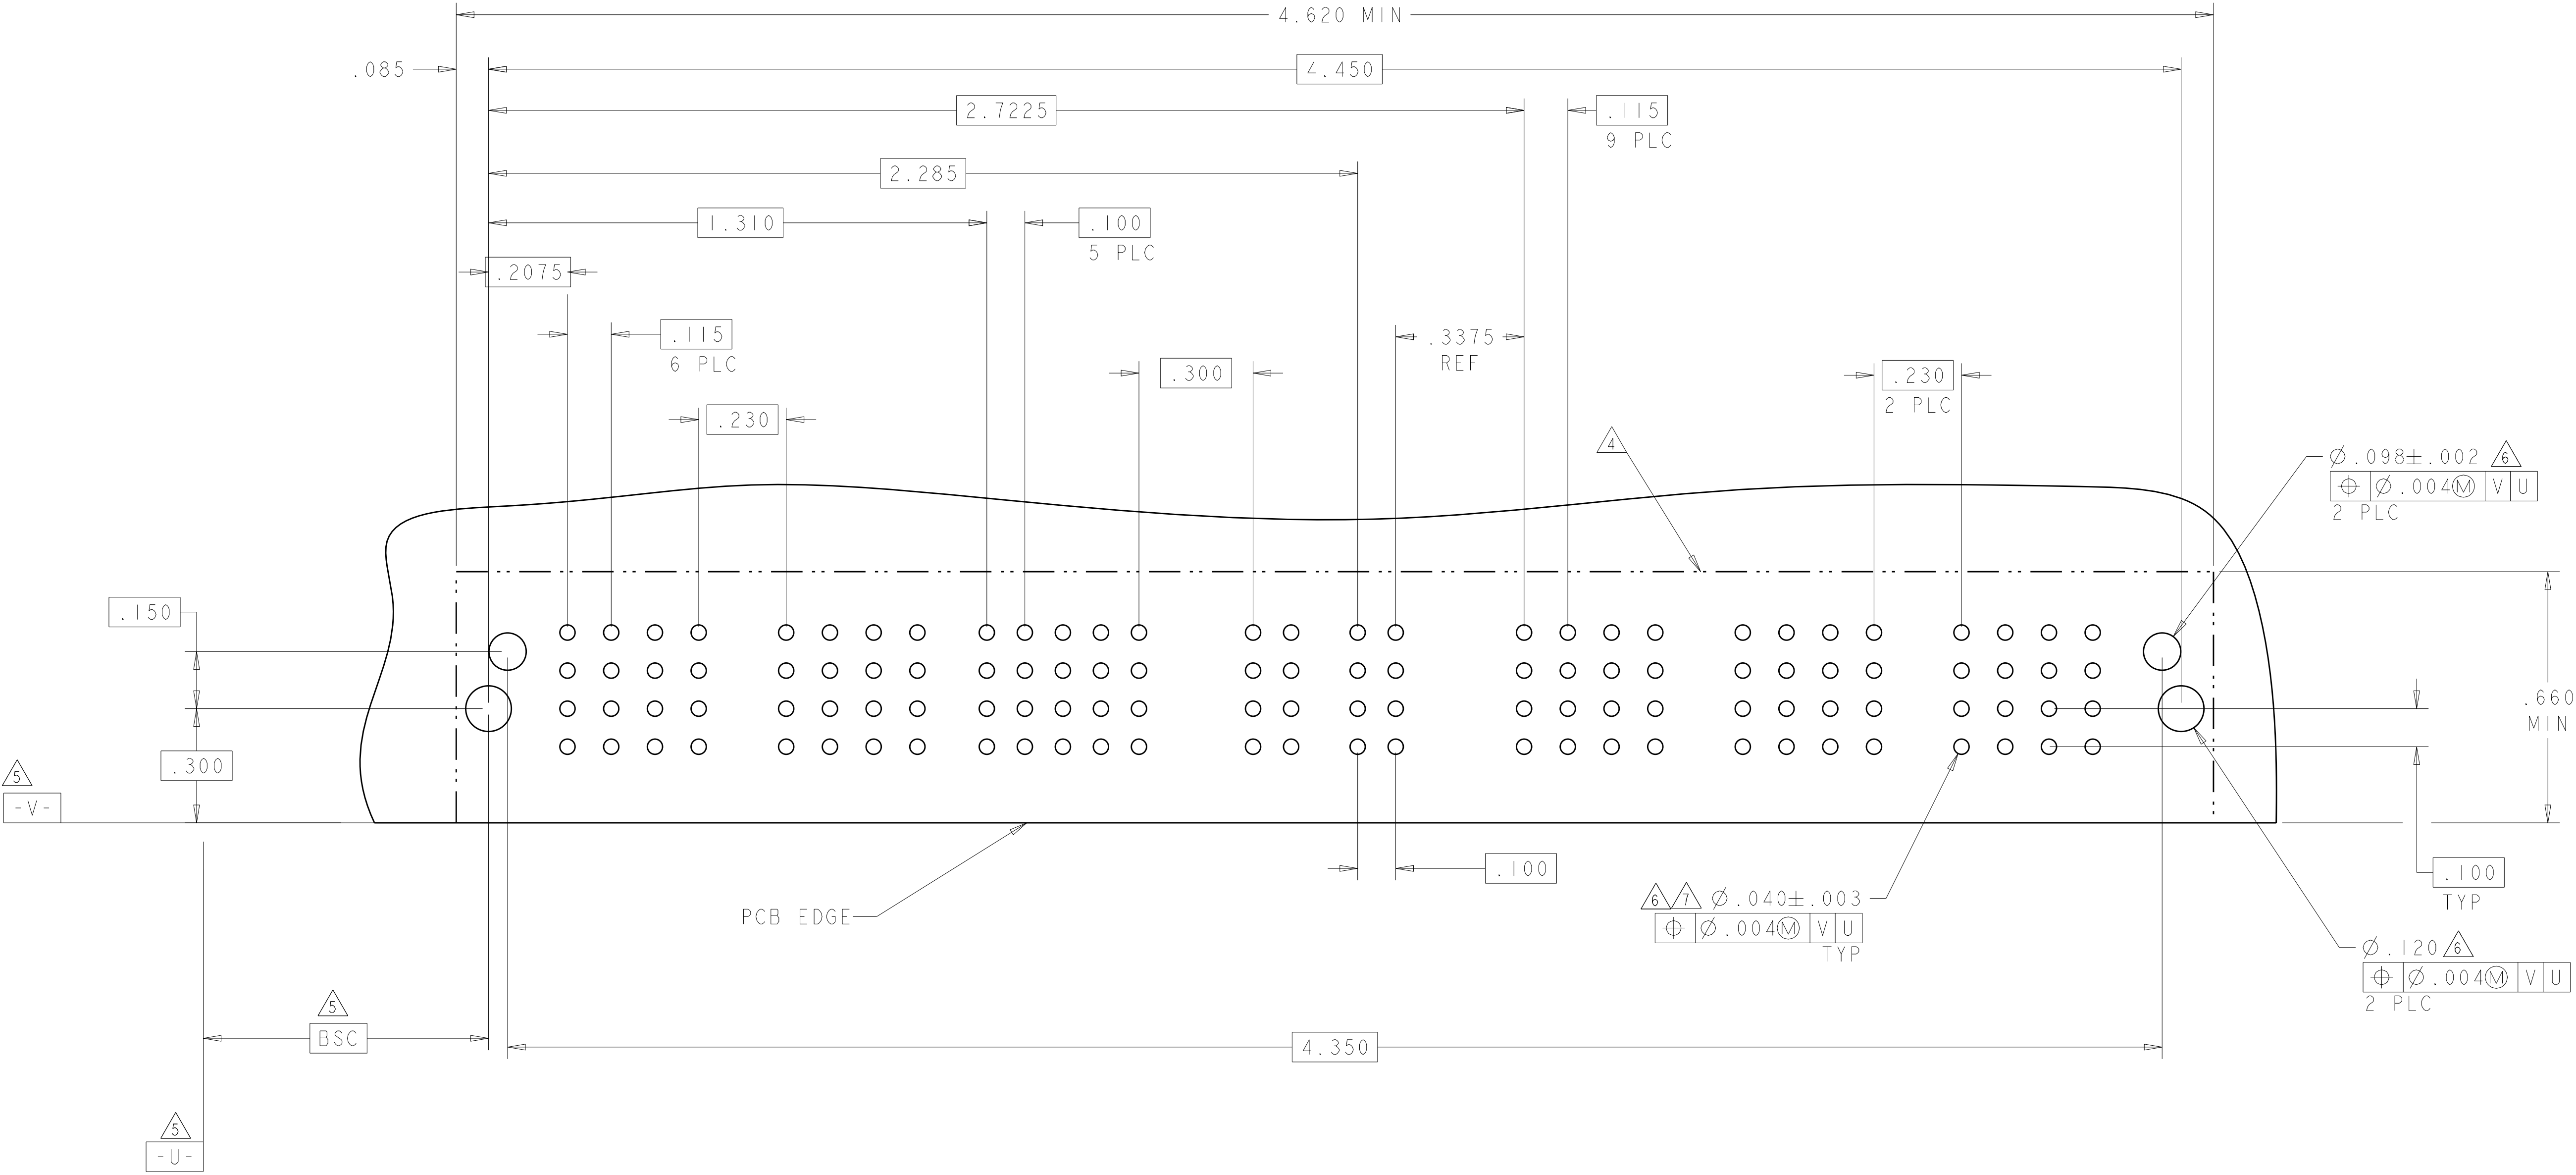

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

S. ZHAO

10APR2007

CHK

S. ZHAO

10APR2007

APVD

S. ZHAO

-

DIMENSIONS:

INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±.01

1 PLC ±.01

2 PLC ±.01

3 PLC ±.005

4 PLC ±.002

ANGLES ±.002

FINISH #2

MATERIAL

-

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

S. ZHAO

10APR2007

CHK

S. ZHAO

10APR2007

APVD

S. ZHAO

-

PRODUCT SPEC

108-2292

APPLICATION SPEC

114-13251

WEIGHT

-

CUSTOMER DRAWING

TE Connectivity

RIGHT ANGLE WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM XLE

SIZE

A1

CAGE CODE

00779

DRAWING NO

6450830

RESTRICTED TO

-

SCALE

4:1

SHEET

42

OF

42

REV

S2