
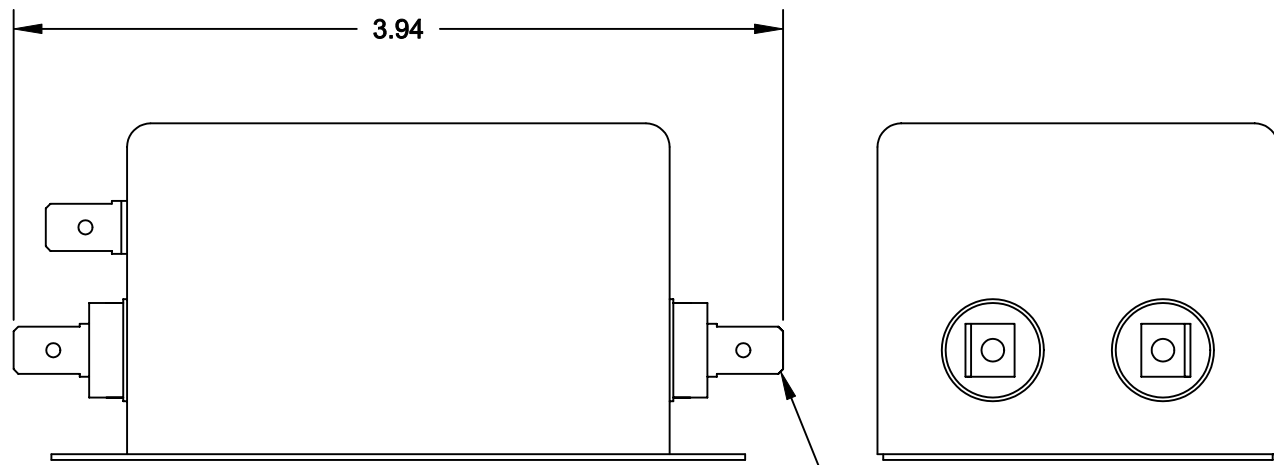
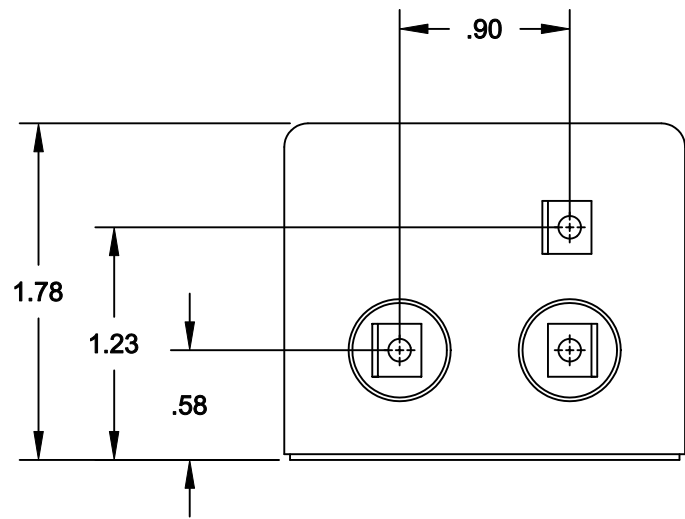


SPECIFICATIONS

1. CASE:
22 GA. (.030) CRS, TIN PLATED
2. RATED CURRENT:
10A
3. RATED VOLTAGE:
250VAC, 50/60Hz
4. TEST VOLTAGE:
LINE TO LINE: 1.7KVDC
LINE TO GROUND: 2.2KVDC
5. LEAKAGE CURRENT:
.8mA @250VAC, 50 Hz


REVISION			
LTR	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	04-08-02	LE
B	REVISED MARKING	03-06-03	LE

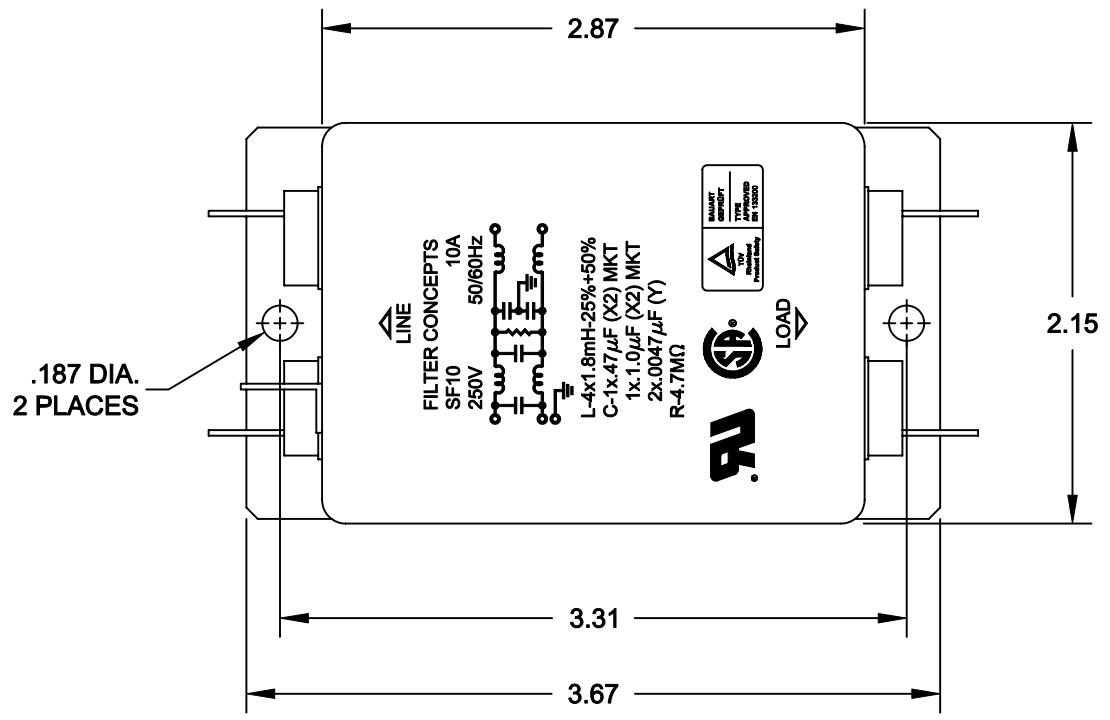

INSERTION LOSS (50Ω TYPICAL)

	.05 MHz	.15 MHz	.50 MHz	1.5 MHz	5.0 MHz	20 MHz
L/L	18 db	45 db	50 db	60 db	65 db	60 db
L/G	6 db	45 db	65 db	65 db	65 db	60 db

SCHEMATIC

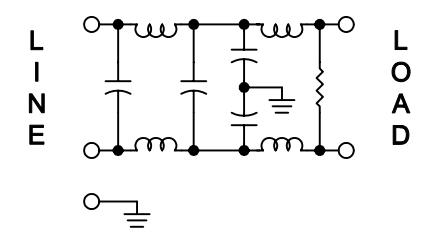

NEXT ASSY	USED ON
APPLICATION	

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ±.030 ± .XXX ±.010	CONTRACT NO.	
	APPROVALS	DATE
MATERIAL	DRAWN	DATE
	CHECKED	DATE
FINISH		

FILTER CONCEPTS INC.

APPLICATION DRAWING

SF10 FILTER

SIZE	CODE IDENT NO.	DRAWING NO.
B		7252
SCALE	1/1	SHEET 1 OF 1