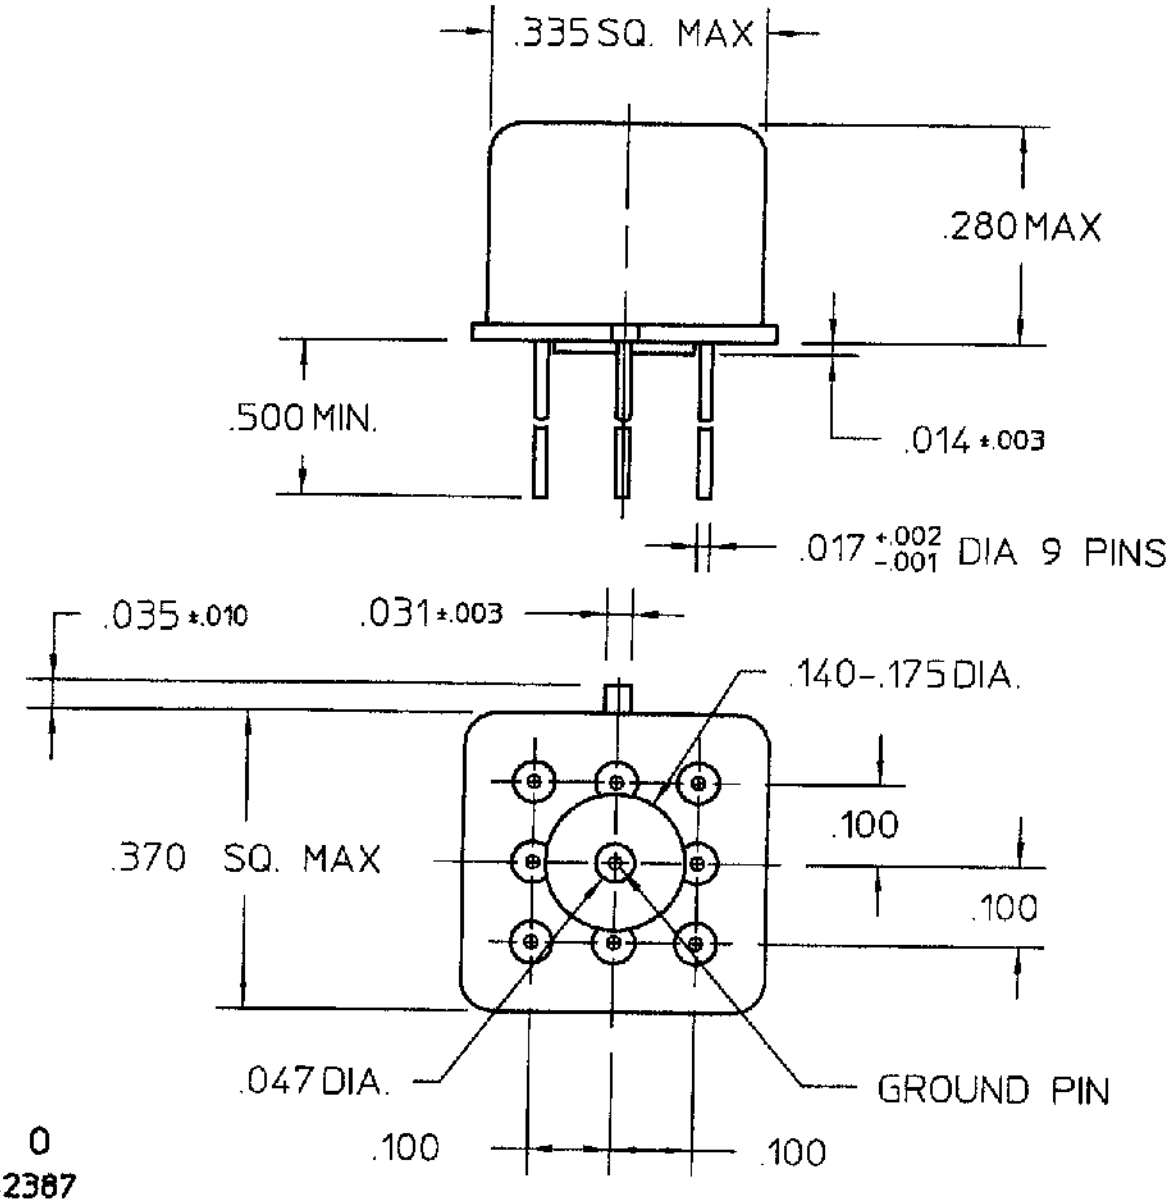

REV. 0
DCO 142387

COIL: @ 25°C

RESISTANCE 50 OHMS ±10%

NOMINAL VOLTAGE 5.0 VDC

MUST OPERATE 2.7 VDC

MUST RELEASE 1.4 VDC MAX, 0.22 VDC MIN.

ENVIRONMENT:

VIBRATION 10 CPS TO 3000 CPS @ 30 g's

SHOCK 75 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 2.0 MS MAX
RELEASE TIME 4.0 MS MAX
CONTACT STABILIZATION TIME 2.5 MS MAX

CUSTOMER DATA SHEET



TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO 1 AMP
28 VDC RESISTIVE 100,000 OPERATIONS

DR. PBB 10/12/00 CK. TLG 10-12-00

CII Technologies
advanced control electronic solutions

CUST. QPL
CUST. NO. M39016/18-049P REV.

JMGAD RELAY

JMGACDG-5PW

F-718 REV. Z