

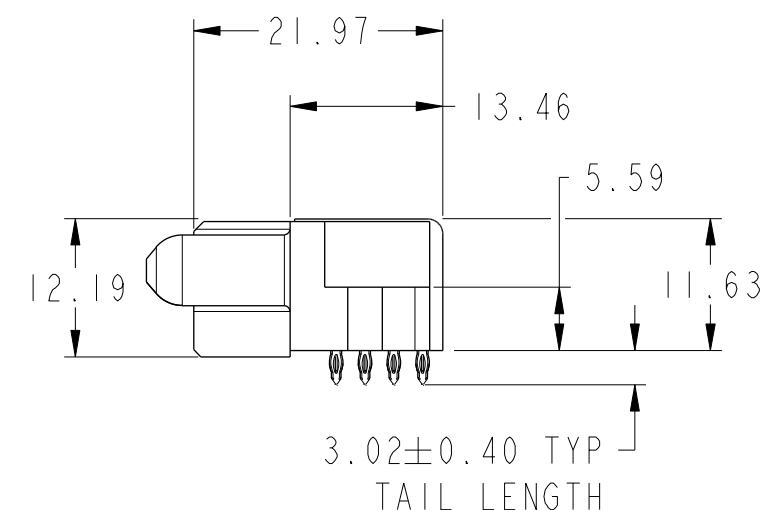
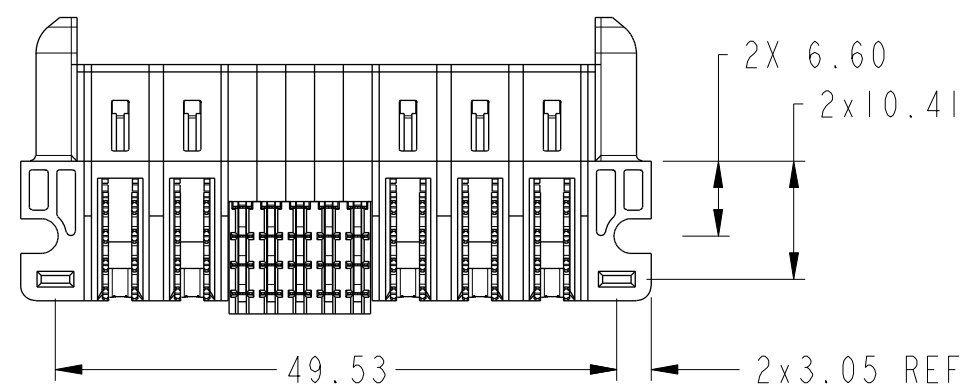


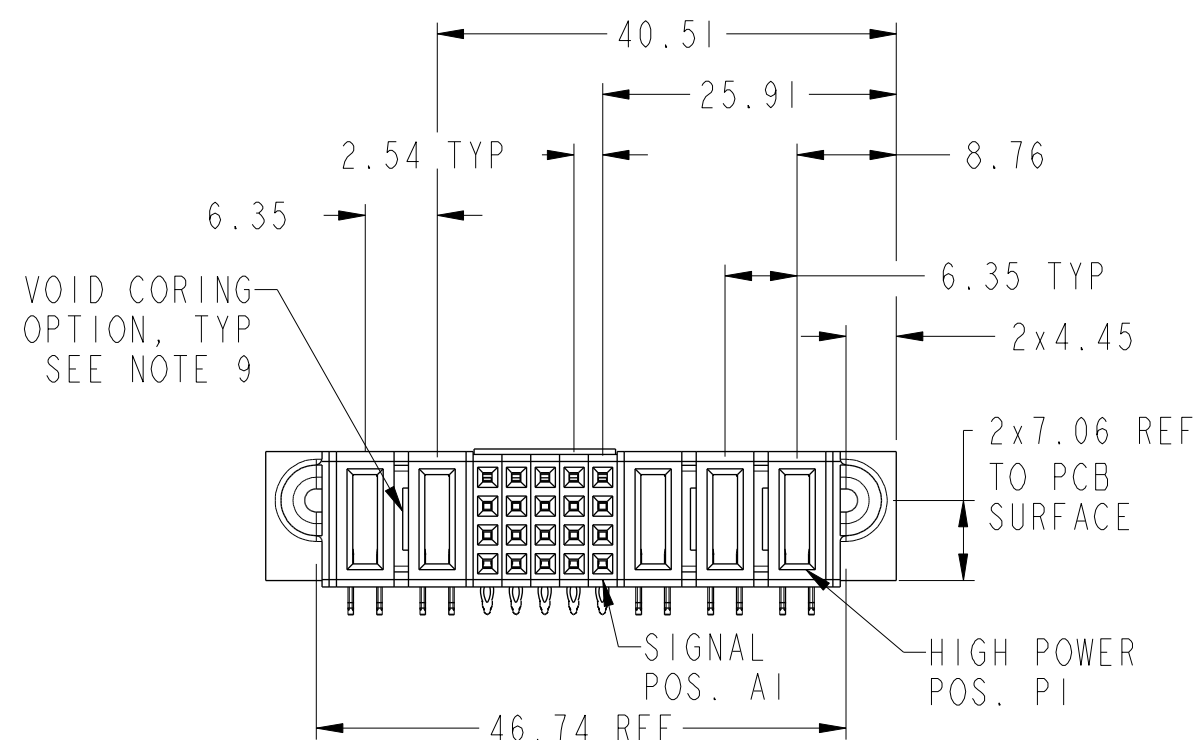


PRODUCT NUMBER SEE SHEET 2

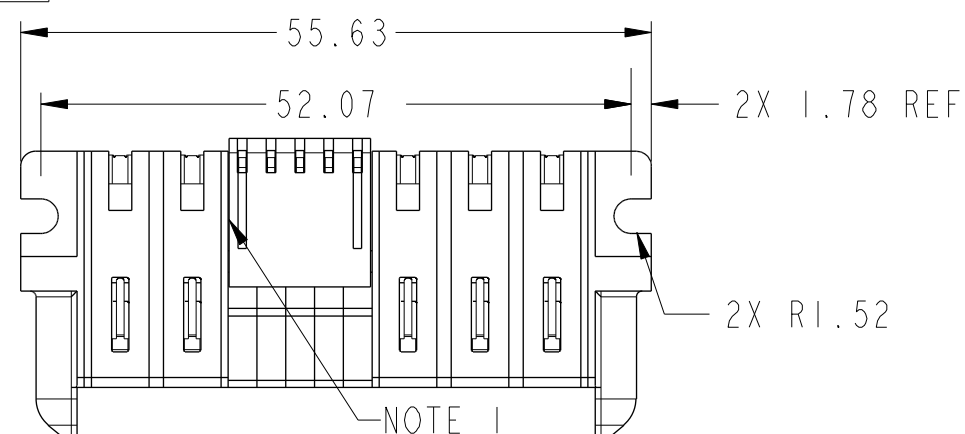

spec ref	*	dr	Vicking Liu	2016/01/14	projection	MM	size	A3	scale	3:2
tolerance std	ASME Y14.5	eng	Vicking Liu	2016/01/29	chr	Fancy Zhang	2016/01/29	ecn no	-	
surface	✓	appr	Pei-Ming Zheng	2016/01/29	product family	PwrBlade+	rel level	Released		
linear	0.X ±0.5 0.XX ±0.25 0.XXX ±0.10	www.fci.com	cat. no.	3HP + 20S + 2HP RA PF RECEPTACLE	dwg no	10106127-5005001	rev	A		
angular	0° ±2°									

NOTES:

- 1) "FCI", PART NUMBER AND DATE CODE TO BE MARKED ON THIS SURFACE.
THE MARK CAN BE OMITTED IF THERE IS NOT ENOUGH SPACE ON THIS SURFACE.
- 2) MATERIALS:
-HOUSING - GLASS FILLED WITH HIGH TEMP THERMOPLASTIC, UL94V-0.
-SIGNAL CONTACT - COPPER ALLOY.
-POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY.
- 3) PLATING SPECIFICATION: 10116351
- 4) DENOTES CONNECTOR KEEP OUT ZONE.
- 5) DATUM AND BASIC DIMENIONS ARE ESTABLISHED BY CUSTOMER.
- 6) ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 7) 1.15 ±0.025MM DRILLED HOLE PLATED WITH 0.00762MM MIN Sn
OVER 0.0254-0.0762MM Cu PLATING TO ACHIEVE A 1.02 ±0.07MM HOLE.
- 8) PRODUCT SPECIFICATION: GS-12-658.
APPLICATION SPECIFICATION: GS-20-141.
PRODUCT PACKAGED IN TRAYS: GS-14-1502.
- 9) THE VOID CORING IN BETWEEN POWER MODULES, SIGNAL
MODULES AND END MODULES ARE OPTIONAL AND THE SHAPE
MAY BE DIFFERENT FOR OPTIMIZING THE MOLDING PROCESS. THE
VOID CORING WILL NOT EFFECT TO PRODUCT FUNCTION.

dr	Vicking Liu	2016/01/14	<div>projection</div> <div></div>	<div>MM</div> <div></div>	size	scale
eng	Vicking Liu	2016/01/29			A3	3:2
chr	Fancy Zhang	2016/01/29			ecn no	-
appr	Pei-Ming Zheng	2016/01/29			rel level	Released
			product family	PwrBlade+		
<div></div> <div>3HP + 20S + 2HP</div> <div>RA PF RECEPTACLE</div>			cat. no.	Product - Customer Drw	sheet 3 of 3	rev
www.fci.com					10106127-5005001	A