




- **Compact design—lightweight yet strong.**
- Electro-tin plated for low contact resistance and corrosion protection when used with copper conductors.
- Require no special installation tools.
- UL and CSA certified for use with copper and aluminum conductors.
- Ports are marked with catalog description and conductor range.
- DFARS Compliant

## Heyco® Aluminum Solderless Connectors

WIRE RANGE (AWG)	PART NO.	DESCRIPTION	PART DIMENSIONS								Bolt Size	
			A		B		C					
			Width		Length		Height		in.	mm.	in.	mm.
Single Conductor												
4-14	1863	A35	.50	12,7	1.06	26,9	.50	12,7				
2-14	1864	A90	.50	12,7	1.16	29,5	.56	14,2	1/4	6,4		
1/0-14	1884	A125	.63	16,0	1.47	37,3	.79	20,1				
Two Conductors												
2-14	1864-2	A90-2	.91	23,0	1.16	29,5	.56	14,2				
1/0-14	1884-2	A125-2	1.12	28,4	1.47	37,3	.78	19,8	1/4	6,4		

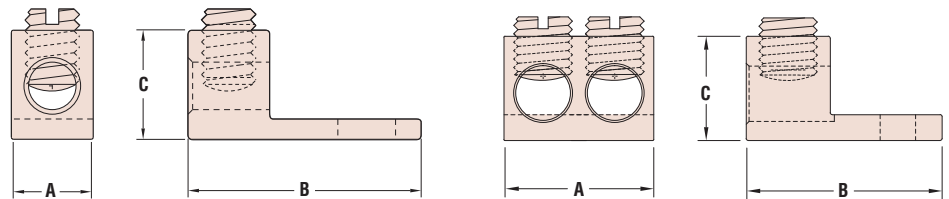


- **100% conductivity for highest efficiency.**
- Completely reuseable.
- Require no special installation tools.
- UL listed and CSA certified for use with copper conductors.
- Marked with catalog description and conductor range.
- DFARS Compliant

## Heyco® Copper Lug Connectors

### Copper Single Hole Offset Lugs

WIRE RANGE (AWG)	PART NO.	DESCRIPTION	CURRENT RATING AMPS	HEIGHT WITH MAX. WIRE		PART DIMENSIONS				Bolt Size	
						A Tang Width		B Length			
				in.	mm.	in.	mm.	in.	mm.		
6-14	1851	CB 35	50	3/4	19,1	.38	9,7	1.38	35,1	3/16	4,8

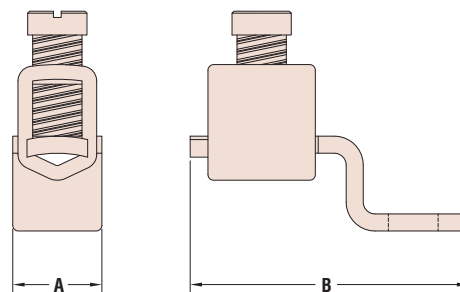

*Quick Specs*

Materials  
Certifications

Flammability Rating

6061-T6 aluminum alloy; electrolytic copper

UL Listed under Underwriters' Laboratories File E80121

SP Certified by the Canadian Standards Association File 242954 & 246619

94V-0