

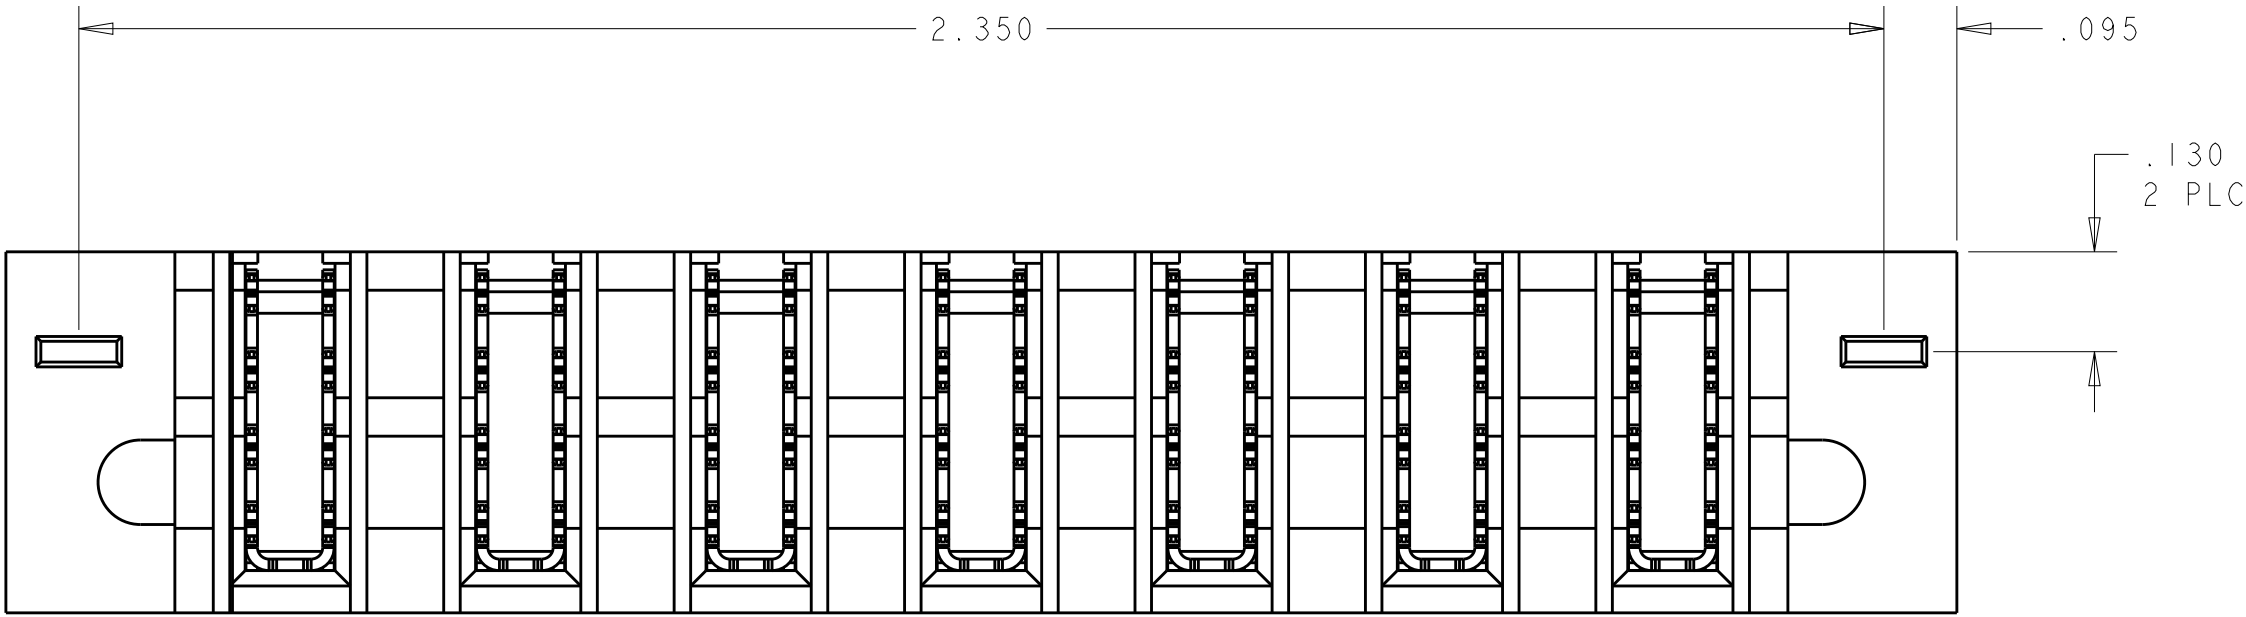
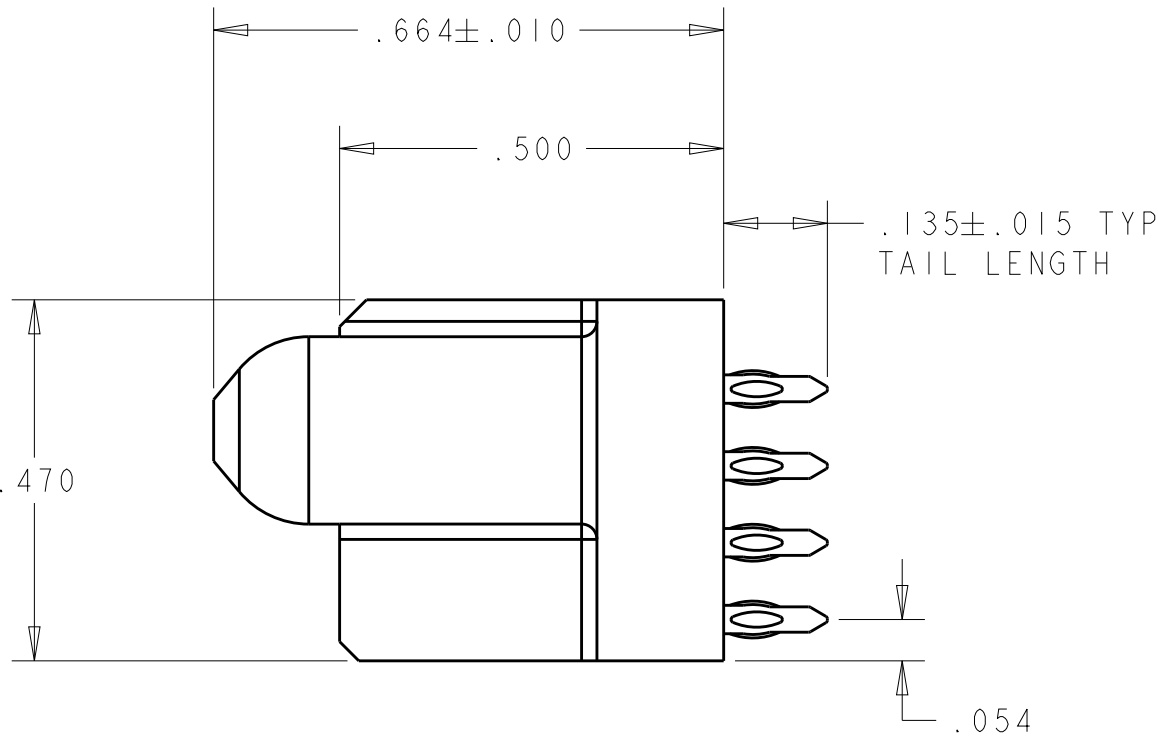



LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
		A		RELEASED	6-2-17	CT	DH

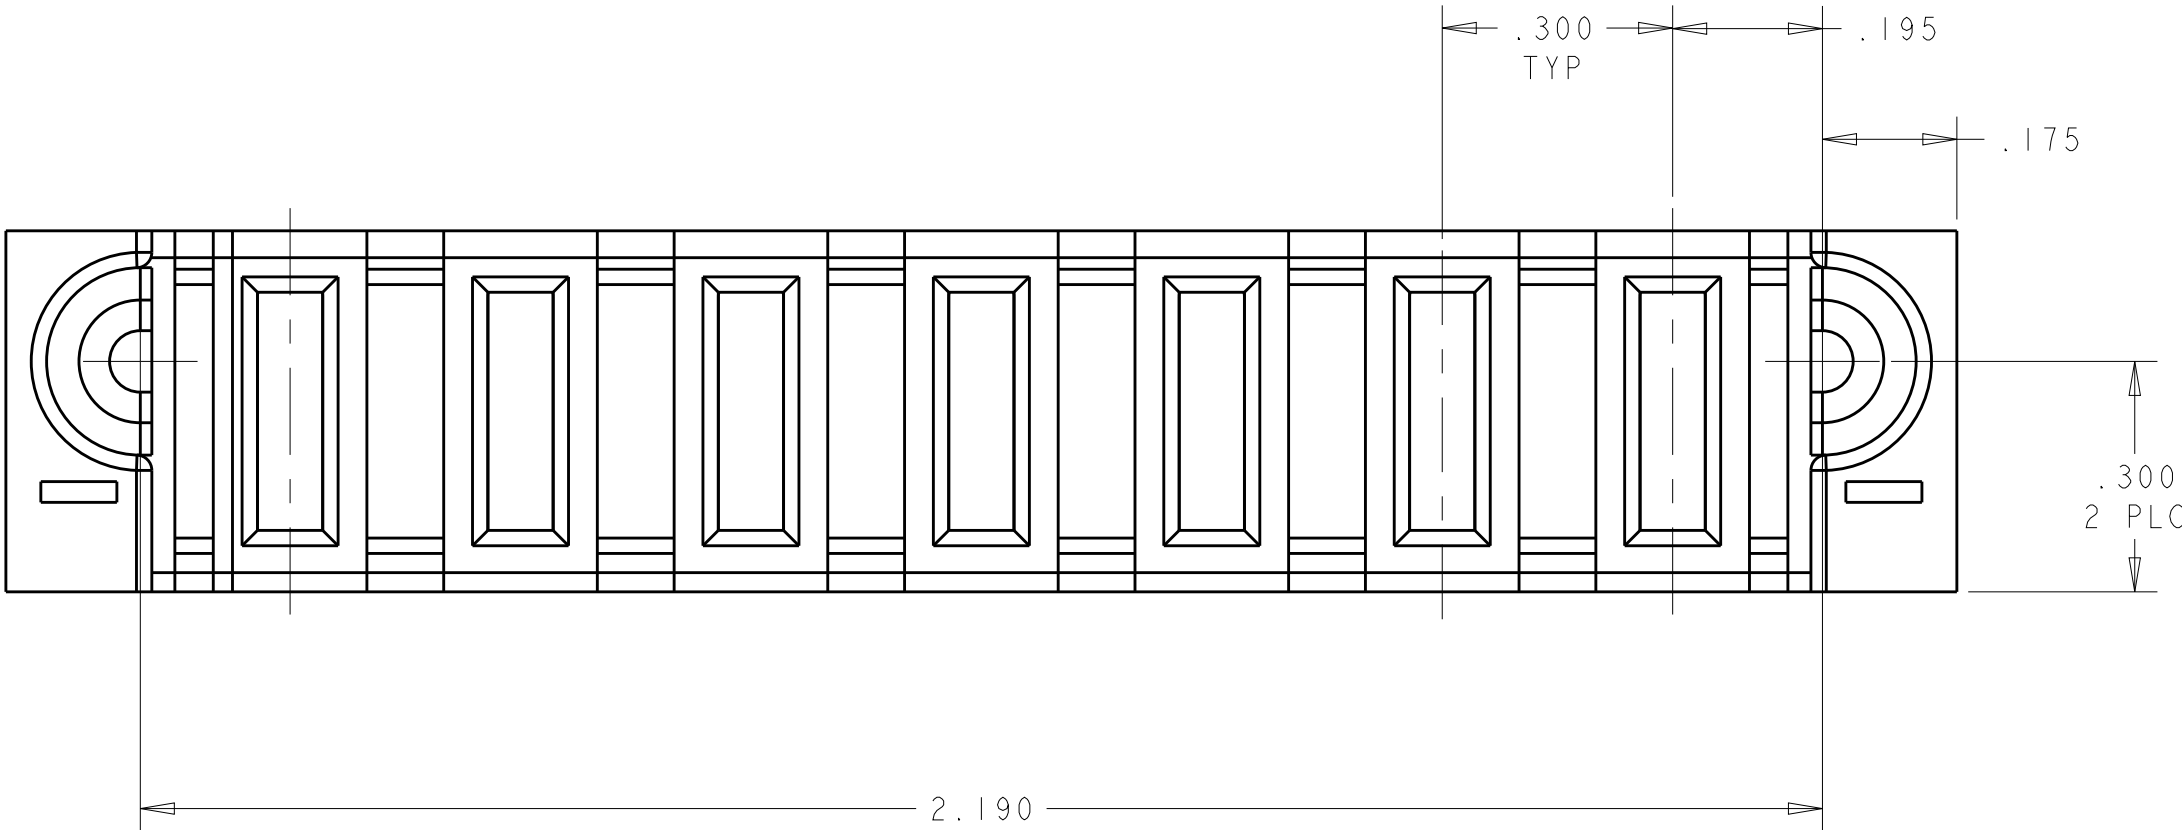

- 1 "TE", PART NUMBER AND DATE CODE TO BE MARKED IN AREA SHOWN
- 2 MATERIAL: HOUSING - GLASS FILLED HIGH TEMP THERMO PLASTIC,UL94 V-O,BLACK.
POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY
- 3 CONTACT PLATING: POWER CONTACTS - .000050 MIN Ni UNDER ALL
.000050 MIN Au ON CONTACT AREA
.000005 MIN Au AT PCB INTERFACE
- 4 MECHANICAL CONNECTOR KEEP OUT ZONE
- 5 DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER
- 6 PCB - ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES
- 7 PCB - 0.0453 ±.0010 DRILLED HOLES PLATED WITH .0003 MIN Sn
OVER .001 TO .003 Cu PLATING TO ACHIEVE A .040 ±.030 HOLE

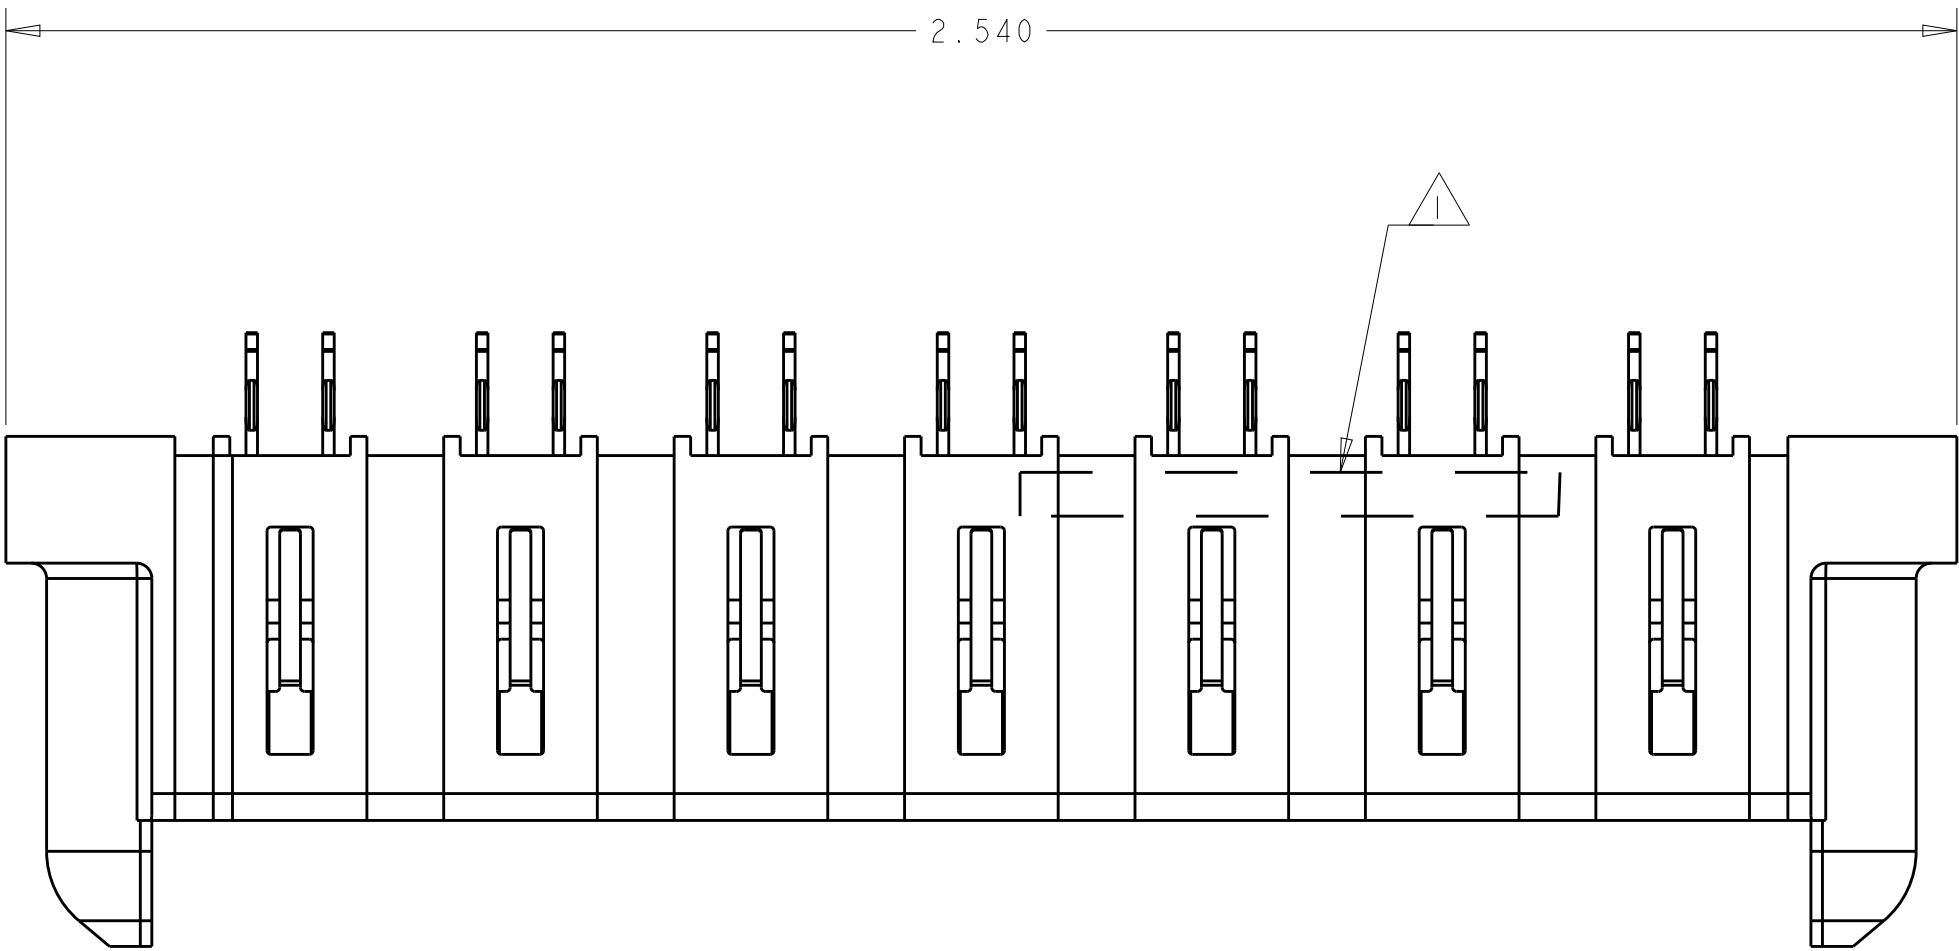

7ACP	2314581-1
DESCRIPTION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C.C.THOMAS 1-10-16	 TE Connectivity	
DIMENSIONS: INCHES		CHK D.HOANG 1-10-17		
	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±.01 1 PLC ±.01 2 PLC ±.01 3 PLC ±.005 4 PLC ±.0020 ANGLES ±2°	APVD D.HOANG 1-10-17	NAME VER RECEP ASSEMBLY SHROT GUIDES, PRESS FIT MULTI-BEAM XLE	
		PRODUCT SPEC 108-2292	SIZE A100779	
MATERIAL 6		APPLICATION SPEC 114-13038	CAGE CODE C=2314581	
		WEIGHT -	RESTRICTED TO -	
CUSTOMER DRAWING		SCALE 2:1		
		SHEET 1 OF 2		
				REV A

Technical drawing of a rectangular plate with a grid of holes. The drawing includes the following dimensions and tolerances:

- Overall width: 2.570 MIN
- Overall height: .610 MIN
- Distance from top edge to first row of holes: .100 TYP
- Distance between rows of holes: .129
- Distance from right edge to last row of holes: .100 7 PLC
- Distance from right edge to last column of holes: .300 6 PLC
- Distance from right edge to last column of holes: .335
- Hole diameter: $\varnothing .040 \pm .003$ 6 7
- Hole diameter: $\varnothing .004$ 56 PLC
- Feature control: V U
- Feature control: 4
- Feature control: 5 BSC
- Feature control: 5 -V-
- Feature control: 5 -U-

4805 (3/11)