

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0432550113](#)
Status: **Active**
Overview: [mlx](#)
Description: 6.35mm (.250") Pitch MLX™ Power Connector Header, Vertical, with Plastic Polarizing Peg, 2 Circuits, PA Polyamide Nylon 6/6 94V-2, Tin (Sn) Plating, Natural (Nylon Off White)

Documents:
[3D Model](#) [Product Specification PSX-42002-0001 \(PDF\)](#)
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification


CSA LR19980
UL E29179

General

Product Family PCB Headers
Series [43255](#)
Application Wire-to-Board
Comments High Vibration Application
Overview [mlx](#)
Product Name MLX™

Physical

Breakaway No
Circuits (Loaded) 2
Circuits (maximum) 2
Color - Resin Natural
Durability (mating cycles max) 50
First Mate / Last Break No
Flammability 94V-2
Glow-Wire Compliant No
Guide to Mating Part Yes
Keying to Mating Part Yes
Lock to Mating Part Yes
Mated Height (in) 1.195 In
Mated Height (mm) 30.35 mm
Material - Metal Phosphor Bronze
Material - Plating Mating Tin
Material - Plating Termination Tin
Material - Resin Nylon
Number of Rows 1
Orientation Vertical
PC Tail Length (in) 0.169 In
PC Tail Length (mm) 4.30 mm
PCB Locator Yes
PCB Retention Yes
PCB Thickness Recommended (in) 0.062 In
PCB Thickness Recommended (mm) 1.60 mm
Packaging Type Bag
Pitch - Mating Interface (in) 0.250 In
Pitch - Mating Interface (mm) 6.35 mm
Pitch - Term. Interface (in) 0.250 In
Pitch - Term. Interface (mm) 6.35 mm
Plating min: Mating (µin) 140
Plating min: Mating (µm) 3.5

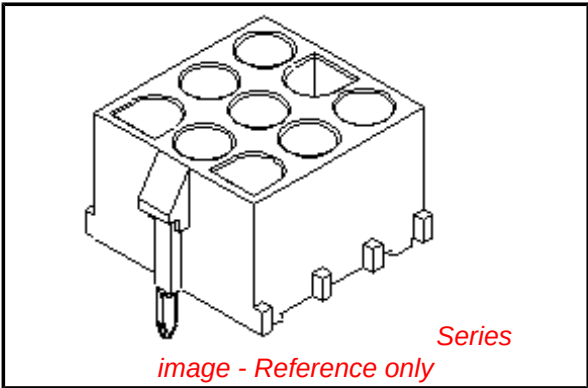

EU RoHS
ELV and RoHS
Compliant
REACH SVHC
Contains SVHC: No
Halogen-Free
Status
Not Reviewed

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series
[43255Series](#)

Mates With
[42021](#) MLX™ Power Crimp Housing Plug.
[42024](#) MLX Crimp Terminal

Polarized to Mating Part	Yes
Polarized to PCB	Yes
Shrouded	Fully
Stackable	No
Surface Mount Compatible (SMC)	No
Temperature Range - Operating	-55°C to +105°C
Termination Interface: Style	Through Hole

Electrical

Current - Maximum per Contact	13.5A
Voltage - Maximum	600V

Solder Process Data

Duration at Max. Process Temperature (seconds)	10
Lead-free Process Capability	Wave Capable (TH only)
Process Temperature max. C	260


Material Info

Reference - Drawing Numbers

Packaging Specification	PK-43255-001
Product Specification	PSX-42002-0001
Sales Drawing	SDA-43255-00**

This document was generated on 05/24/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

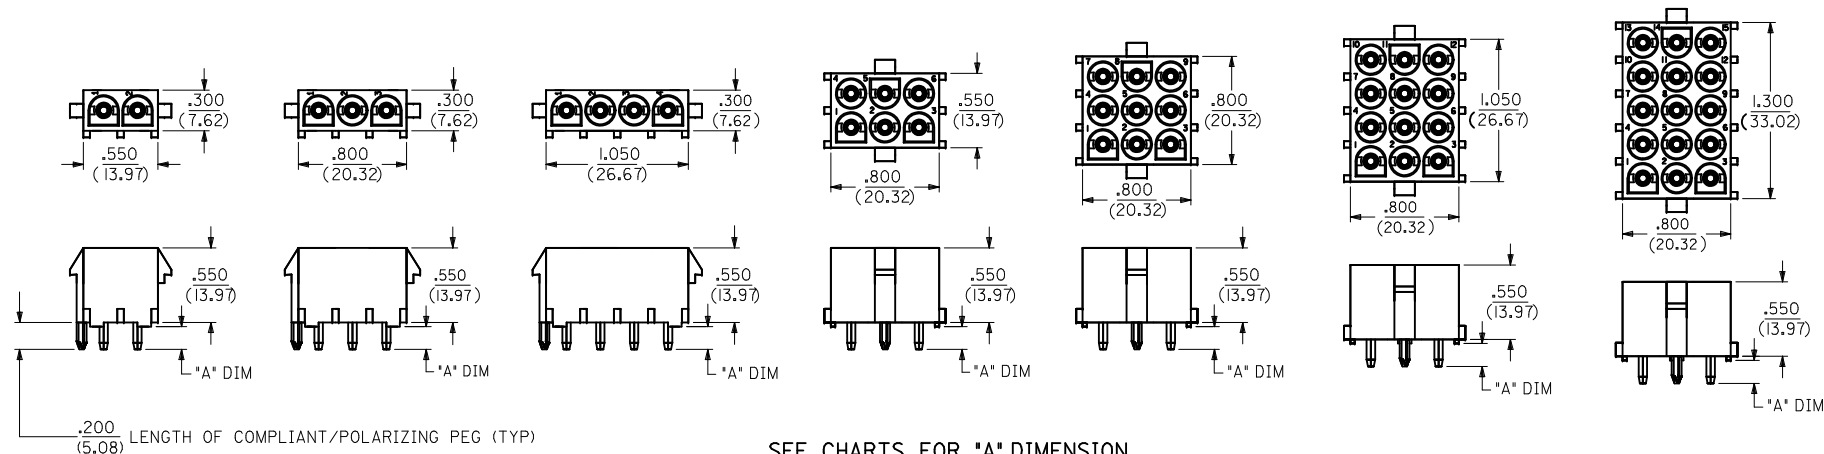


SEE CHARTS FOR 'A' DIMENSION


(THE 'A' DIMENSION APPLIES TO THE LENGTH OF THE TERMINAL ONLY)

P.C. BOARD MOUNTING DIMENSIONS

2, 3, & 4 POSITION HEADER ASSEMBLIES

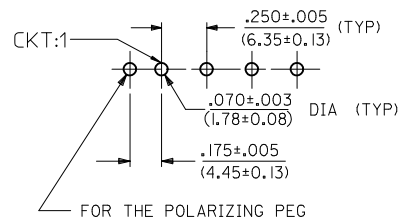

6, 9, 12 & 15 POSITION HEADER ASSEMBLIES

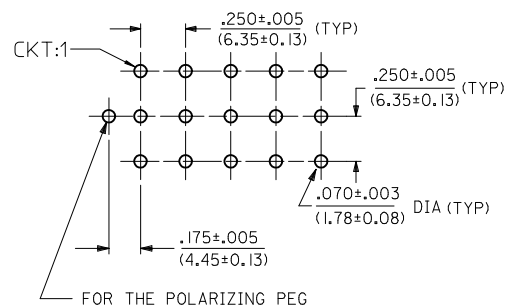

NOTES:

1) MATERIAL CODES:

- 'A'= UNREINFORCED POLYESTER, 94V-0. COLOR: WHITE
- 'C'= NYLON (PA66), UL94V-2. COLOR: NATURAL-TRANSLUCENT
- 'D'= NYLON, V-2, COLOUR: BLACK (ZYTEL 101F)
- 'E'= PA6, SCHULAMID V-2 GRADE, CTI=325V, GLOW WIRE COMPATIBLE COLOUR: NATURAL-WHITE

2) PLATING CODES:

- 'A' = TIN 140 m.l.(3.50 MICRONS) TO 240 m.l (6.00 MICRONS)

3) TERMINAL LENGTH CODES:

- I= TERMINAL FOR .062/(1.57) THICK PC BOARD

4) DIMENSIONS ARE FOR REFERENCE ONLY UNLESS INDICATED OTHERWISE.

5) HEADER ASSEMBLY HOUSINGS MATE WITH :

- PLUG HOUSINGS, .084/(2.13) DIA, SERIES: (4202I-**))

6) CONTACTS ARE ON .250/(6.35) GRID CENTERLINE SPACING.

7) PACKAGING SPECIFICATION:

- 'A' - PK-43255-001, PK-43255-002, PK-43255-003
- 'B' - PK-36518-292

RoHS COMPLIANT

ENTER DESCRIPTION		QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION	
EC NO: 12010-0191		▽=0		mm INCH		IN/MM		1:1	INCH	THIRD ANGLE PROJECTION	
2009/12/31		▽=0		4 PLACES ± --- ± ---		DRAWN BY DATE		TITLE		HEADER HOUSING ASSEMBLY	
DRWN:HMR01				3 PLACES ± --- ± 0.005		SUDHIR 2004/06/08				.084/(2.13) SERIES	
CHKD:KPRASAD				2 PLACES ± 0.13 ± 0.01		CHECKED BY DATE				COMPLIANT-POLARIZING PEG	
2010/01/05				1 PLACE ± 0.25 ± ---		GJLOWE 2004/06/08					
APPR:KPRASAD				ANGULAR ±1/2°		APPROVED BY DATE		molex MOLEX INCORPORATED			
2010/01/13				DRAFT WHERE APPLICABLE		GJLOWE 2004/06/08		DOCUMENT NO.		SHEET NO.	
				MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO.		SDA-43255-00**		1 OF 2	
E2						SIZE A2		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			

	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	
M		ITEM NO.	CIRCUIT SIZE	MATERIAL COLOR (SEE NOTE 1)	PIN (1) OR SOCKET (2) TERMINALS	TERMINAL PLATING (SEE NOTE 2)	TERMINAL LENGTH (SEE NOTE 3)	"A" DIM ±.015	PACKAGING (SEE NOTE 7)												M
		43255-0003	2	A	2	A		.17/(4,3)	A												
		43255-0059		A	1	A			A												
		43255-0113		C	1	A			A												
		43255-0115		C	2	A			A												
		36759-0021		D	1	A			A												
		36759-0061		D	2	A			A												
L		36757-0021	3	E	1	A			A												L
		36757-0061		E	2	A			A												
		43255-0011		A	2	A		.17/(4,3)	A												
		43255-0067		A	1	A			A												
		43255-0121		C	1	A			A												
		43255-0123		C	2	A			A												
K		36759-0022	4	D	1	A			A												K
		36759-0062		D	2	A			A												
		36757-0022		E	1	A			A												
		36757-0062		E	2	A			A												
		43255-0019		A	2	A		.17/(4,3)	A												
		43255-0075		A	1	A			A												
J		43255-0129	6	C	1	A			A												J
		43255-0131		C	2	A			A												
		36759-0023		D	1	A			A												
		36759-0063		D	2	A			A												
		36757-0023		E	1	A			A												
		36757-0063		E	2	A			A												
I		43255-0027	9	A	2	A		.17/(4,3)	A												I
		43255-0083		A	1	A			A												
		43255-0137		C	1	A			A												
		43255-0139		C	2	A			A												
		36759-0024		D	1	A			A												
		36759-0064		D	2	A			A												
H		36757-0024	12	E	1	A			A												H
		36757-0064		E	2	A			A												
		43255-0035		A	2	A		.17/(4,3)	A												
		43255-0091		A	1	A			A												
		43255-0145		C	1	A			A												
		43255-0147		C	2	A			A												
G		36759-0025	15	D	1	A			A												G
		36759-0065		D	2	A			A												
		36757-0025		E	1	A			A												
		36757-0065		E	2	A			A												
		43255-0043		A	2	A		.17/(4,3)	A												
		43255-0099		A	1	A			A												
F		43255-0153	2	C	1	A			A												F
		43255-0155		C	2	A			A												
		36759-0026		D	1	A			A												
		36759-0066		D	2	A			A												
		36757-0026		E	1	A			A												
		36757-0066		E	2	A			A												
E		43255-0051	3	A	2	A		.17/(4,3)	A												E
		43255-0107		A	1	A			A												
		43255-0161		C	1	A			A												
		43255-0163		C	2	A			A												
		36759-0027		D	1	A			A												
		36759-0067		D	2	A			A												
D		36757-0027	4	E	1	A			A												D
		36757-0067		E	2	A			A												
		36766-0001		C	1	A		.17/(4,3)	B												
		36766-0002		C	1	A			B												
		36766-0003		C	1	A			B												
				C	1	A			B												
C																					C
B																					B
A																					A
b_frame_A1_P_AM.T Rev. E 2006/04/15																					

ENTER DESCRIPTION EC NO: 12010-0951 2009/12/31 DRWN:HM01 CHKD:KPRASAD APPR:KPRASAD 2010/01/05 2010/01/13	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE	DESIGN UNITS INCH	THIRD ANGLE PROJECTION
		4 PLACES ± --- ± ---		DRAWN BY SUDHIR DATE 2004/06/08		TITLE HEADER HOUSING ASSEMBLY .084/(12.13) SERIES COMPLIANT-POLARIZING PEG		
		3 PLACES ± --- ± 0.005		CHECKED BY GJLOWE DATE 2004/06/08				
		2 PLACES ± 0.13 ± 0.01		APPROVED BY GJLOWE DATE 2004/06/08		MOLEX INCORPORATED		
		1 PLACE ± 0.25 ± ---						
		ANGULAR ±1/2°						
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART		DOCUMENT NO. SDA-43255-00**		
		SIZE A 1		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		SHEET NO. 2 OF 2		

RoHS COMPLIANT