

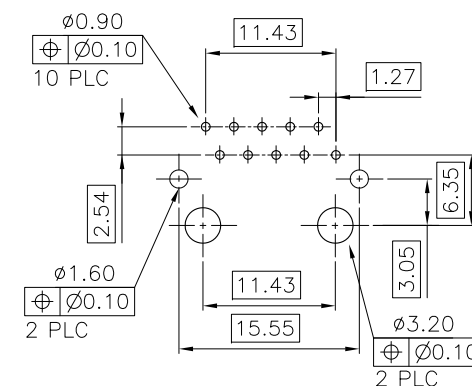


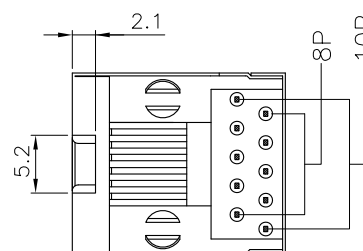

RECOMMENDED PCB LAYOUT (THICKNESS: 1.6mm)
DIMENSION TOLERANCE: 1 PLC: ± 0.1 2PLC: ± 0.05)

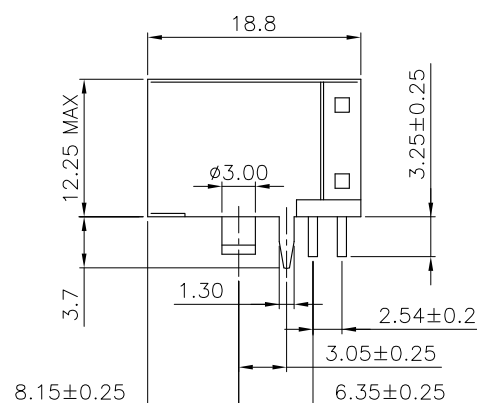

5. OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

OBSOLETE	10P8C	RED	50μ"	3-1734580-4
			30μ"	3-1734580-3
			15μ"	3-1734580-2
			6μ"	3-1734580-1
OBSOLETE	10P10C	BLACK	50μ"	1-1734580-4
			30μ"	1-1734580-3
			15μ"	1-1734580-2
			6μ"	1-1734580-1
OBSOLETE	10P8C △	BLACK	50μ"	1734580-8
			30μ"	1734580-7
			15μ"	1734580-6
			6μ"	1734580-5
OBSOLETE	10P8C	BLACK	50μ"	1734580-4
			30μ"	1734580-3
			15μ"	1734580-2
			6μ"	1734580-1
	RJ 45	HSG. COLOR	MIN. GOLD THICKNESS	PART NUMBER

CUSTOMER DRAWING

DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:	
MM		0 PLC	± 0.50
		1 PLC	± 0.30
		2 PLC	± 0.20
		3 PLC	± 0.10
		4 PLC	± .
		ANGLES	
MATERIAL		FINISH	
SEE NOTE		SEE NOTE	



MODULAR JACK, RJ45, 8P8C, SHIELDED,
SIDE ENTRY, LOW PROFILE

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C=1734580	—
		SCALE	SHEET
		—	1 OF 2
			REV B3

D

D

C



C

B


B

A

A

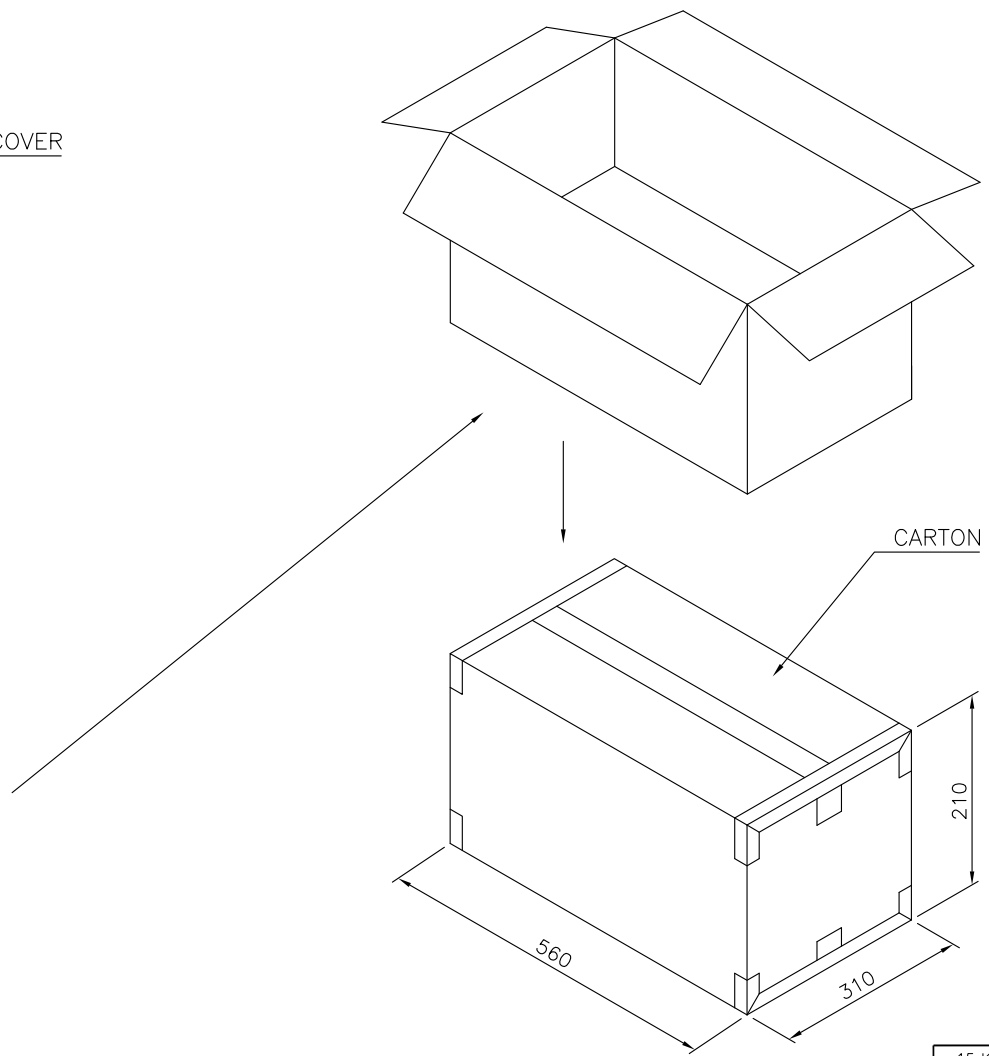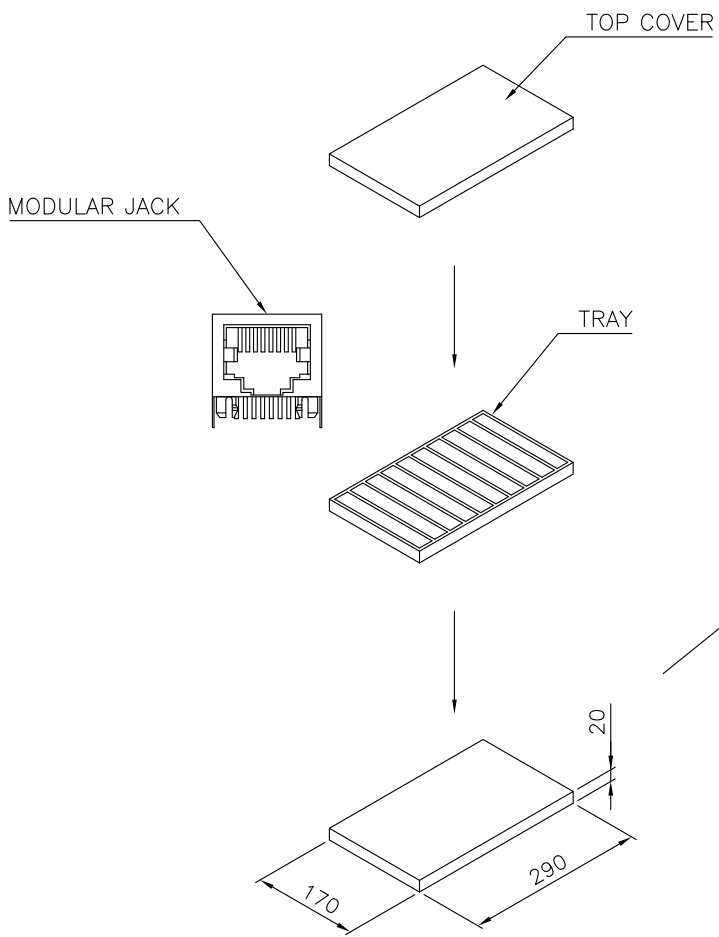

15 Kg	13.5 Kg	100	25	2500 PCS
GROSS WEIGHT	NET WEIGHT	PCS/TRAY	TRAYS /CARTON	QUANTITY

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN O. HU 01JUN2007	 TE Connectivity				
DIMENSIONS: MM		CHK S. HOU 01JUN2007				NAME	
		APVD W.J. KE 01JUN2007				MODULAR JACK, RJ45, 8P8C, SHIELDED, SIDE ENTRY, LOW PROFILE	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC				SIZE	
0 PLC ± -		—	CAGE CODE				
1 PLC ± -		APPLICATION SPEC	DRAWING NO				
2 PLC ± -		—	A300779				
3 PLC ± -		WEIGHT	C=1734580				
4 PLC ± -		—	RESTRICTED TO				
ANGLES ± -		CUSTOMER DRAWING	SCALE				
MATERIAL		FINISH	SHEET				
			2 of 2				
			REV B3				