




1. RECOMMENDED SPARE PARTS.
2. GREASE RAM, CAM, CAM FOLLOWER AND FEED ROD LIGHTLY.
3. LUBRICATE DAILY PER THE APPLICATOR INSTRUCTION SHEET SUPPLIED WITH THE APPLICATOR.
4. CUT TO LENGTH AT ASSY.

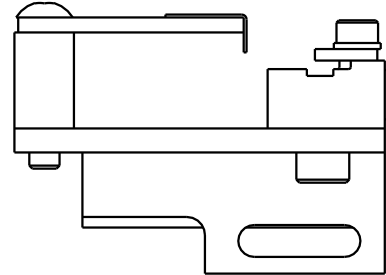

		D	ECR 05-007334	TE	7-05
		C1	ECN 0150-0402-04	TE	3-04
		C	0150-0720-03	RK	JUL 03
		B	0150-0594-01	CE	JUN 0
		A	SEE ECN 015A-0506-00	NOVOC	
P	F	LTR	REVISION RECORD	APP	DATE

QTY REQD PER ASSY				PARTS LIST									
DIMENSIONS: mm [INCHES]				MATL	-	HT TR	-	FIN	-				
DO NOT SCALE PRINT.													
TOLERANCES UNLESS SPECIFIED:													
2 P/LC DEC ± 0.5 [.02 IN]				DR 06JUN00		APP 06JUN00		 AMP Incorporated Harrisburg, PA 17105-3608					
3 P/LC DEC $\pm$				M.C.LIFFORD		F.BACKHURST							
4 P/LC DEC $\pm$				CHK 01-11-00		REL 01-11-00							
ANGLES $\pm$				L.LOFTHOUSE		M.C.LIFFORD							
SURF TEXTURE:				NAME				SIDE FEED HD-I APPLICATOR					
REMOVE BURRS, BREAK SHARP EDGES R.38 MAX				SCALE				D				DWG NO	
				-				1426007				SHEET	
												1 of 1	
												REV	
												D	
CASE CODE				CUSTOMER AND ASSEMBLY DRAWING								RESTRICTED TO	
00779												-	